

DM28001007-02



www.catpowertools.com

©2026 Caterpillar. CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow," the "Power Edge" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.



CATALOGUE

LET'S DO THE WORK.™



CAT[®] POWER TOOLS
FROM THE BRAND
YOU CAN TRUST

In every corner of the world ,you'll find a Cat[®] machine.

Cat[®] is recognized as the leader in building and construction. Globally, the Cat[®] logo has become an icon, often worn as a badge symbolizing grit, toughness and a get-it-done attitude.

Cat[®]products are engineered for superior performance, designed to last, and backed by the largest, most experienced dealer support network in the world.

CONTENTS



18V POWER TOOLS [⊕]
P20-35



12V POWER TOOLS [⊕]
P36-38



AC POWER [⚡]
P39-62



ACCESSORY
P63-75



18V GARDEN TOOLS [⊕]
P76-87



60V MAX GARDEN TOOLS [⊕]
P88-118

ICONS GUIDE

 Brushless motor	 Max torque	 Chuck capacity	 No load speed	 Blade bore size	 Drilling capacity	 LCD display	 Temperature
 3 Speed setting	 Chuck capacity	 5 function: Drill/Hammer drill/Chisel/Chisel Bit Rotation/Tile drilling	 Impact energy	 2 Positions airflow	 Chuck capacity	 Light weight design	 Bevel capacity adjustment
 TOOL-FREE quick change system	 Rated power	 Disc size	 Tool free change system	 Oscillation working angle	 LED light	 Torque setting	 Speed setting
 Rotary rear handle	 Spindle thread	 Compact slim body design	 Blade size	 Patented cyclone dust collection	 Quick guard adjustment	 Micro depth adjustment	 USB power output
 Bevel capacity	 Max cutting depth	 4 position pendulum function	 Stoke length	 Aluminum gear box	 Belt size	 Quick release belt change	 Anti-Vibration
 Sanding base diameter	 Orbital diameter (Rotary sander)	 Hook & Loop system	 Micro cutting depth adjustment	 Light	 Working time	 Brightness Level	 Variable speed with reverse
 Max. rebate depth	 Left & Right dust ejection	 FM/DAB FM/DAB function	 Dustproof / waterproof	 Base size (Sheet sander)	 Orbital diameter (Sheet sander)	 Soft start	 Constant speed
 Bluetooth input	 Loudspeaker power	 Sanding and Polishing 2in1 function	 Spindle lock	 UNIVERSAL FIT SYSTEM		Universal interface fit for all brand oscillating blade	



ForAll **ONE BATTERY** ⁺

POWER ⁺
TOOLS

18V ⁺
LI-ION
ALL TOOLS

GARDEN ⁺
TOOLS



8.0AH | 18V 8.0AH BATTERY TECHNOLOGY



ICE CONTROL

1/ Exclusive cooling frame with *TES material design keep cell cool under heavy load, deliver 15% longer running time.

* TES: Thermal energy storage, TES material can absorb and store the heat of the battery ,release the heat when the ambient temperature is lower than its temperature.




NEW GENERATION BATTERY CELL

More power

1/ 40% enhanced power deliver better performance for tough job

More compact

2/ 25% lighter weight and 10% more compact design (compare with 18650 cell for the same capacity)

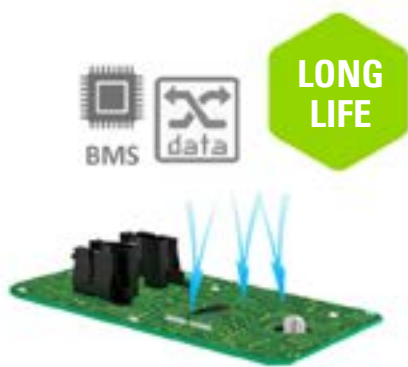

ADVANCED BMS CONTROL SYSTEM

Keep communicate with tool and charger to optimize battery life by actively controlling current, voltage and temperature.

DXB8HP 18V 8.0Ah Battery Pack



SPECIFICATIONS

Voltage:	18V
Battery capacity:	8.0Ah Li-ion
Charging time:	40mins (Work with Charger DXC152)
Machine weight:	1.03Kg

DXB2 18V 2.0Ah Battery Pack



SPECIFICATIONS

Voltage:	18V
Battery capacity:	2.0Ah Li-ion
Charging time:	30mins(Work with Charger DXC15) 20mins(Work with Charger DXC152)
Machine weight:	0.37Kg

DXB26 12V 2.0Ah Battery Pack

SPECIFICATIONS

Voltage:	12V
Battery capacity:	2.0Ah Li-ion
Machine weight:	0.18Kg

DXB4 4.0Ah Battery Pack



SPECIFICATIONS

Voltage:	18V
Battery capacity:	4.0Ah Li-ion
Charging time:	30mins(Work with Charger DXC15) 20mins(Work with Charger DXC152)
Machine weight:	0.65Kg

DA18099 18V 2.0A USB Adapter



SPECIFICATIONS

Output voltage:	5V
Output current:	2.0A
Charging port:	Dual
Machine weight:	0.1Kg



charge

INTELLIGENT PCB CONTROL

The charger communicates with the battery by intelligent PCB control throughout the charging process to optimize battery life by actively controlling current, voltage and temperature.



Max. Output Current
15.0A



Power
380W



Quick Charge
88MIN
(2pc 8.0Ah Batteries)



Cooling Fan

DXC152



DXC152

18V 15.0A Dual Port Charger



SPECIFICATIONS

Nominal voltage:	18V
Max. Output Current:	15.0A
Power:	380W
Charging time:	2.0Ah(DXB2)/4.0Ah(DXB4) 20mins 8.0Ah (DXB8HP) 40mins
Machine weight:	1.38Kg

DXC2

18V 2.0A Charger



SPECIFICATIONS

Output voltage:	18V
Max. Output Current:	2.0A
Input Power:	48W
Charging time:	2.0Ah (DXB2) 80 mins 4.0Ah (DXB4) 140 mins
Machine weight:	0.30Kg

DXC4

18V 4.0A Charger



SPECIFICATIONS

Output voltage:	18V
Max. Output Current:	4.0A
Power:	95W
Charging time:	2.0Ah (DXB2) 35 mins 4.0Ah (DXB4) 68 mins
Machine weight:	0.40Kg

DXC42

18V 4.0A Dual Charger



SPECIFICATIONS

Output voltage:	18V
Max. Output Current:	4.0A
Input Power:	105W
Charging time:	2.0Ah (DXB2) 30 mins 4.0Ah (DXB4) 60 mins
Machine weight:	0.40Kg

DXC15

18V 15.0A Fast Charger



SPECIFICATIONS

Nominal voltage:	18V
Max. Output Current:	15.0A
Power:	380W
Charging time:	2.0Ah (DXB2) 30mins 4.0Ah (DXB4) 30mins
Machine weight:	1.18Kg

DXC26

12V 1.5A Charger

SPECIFICATIONS

Output voltage:	13V
Charging current:	1.5A
Input Power:	24W
Charging time:	2.0Ah (DXB26) 80 mins
Machine weight:	0.20Kg



BRUSHLESS MOTOR

Best-in-class brushless motor and precise electrical control technology deliver the ultimate performance, durability and run-time.

25%
More Power

50%
Efficiency

10X
Longer Motor Life



This Data/Document/Program is the exclusive property of Positec Technology (China) Co.Ltd. Without their consent it may not reproduced or given to third parties.

STORAGE SYSTEM

3 PIECES
FULL
STORAGE

- Tool Box DA41002
- Larger Tool Box DA41003
- Rolling Tool Box DA41004
- + Storage Box System DA41005

250 LBS
WEIGHT CAPACITY



**MODULAR
DESIGN**



**IP65
WATER
PROOF**



**IMPACT
RESISTANCE
QUALITY**





DA41005 Storage Box System

-  **MODULAR DESIGN**
-  **IMPACT RESISTANCE QUALITY**
-  **IP65 WATER PROOF**
-  **9-INCH WHEELS**
-  **INNOVATIVE LOCKING CONSTRUCTION**



Outside Size	Storage Capacity	Weight Capacity	Wheels	IP Rating
855X550X590mm	125.3L	425LBS	9 Inch 230mm	IP65

DA41002 Tool Box

-  **MODULAR DESIGN**
-  **IMPACT RESISTANCE QUALITY**
-  **IP65 WATER PROOF**
-  **INNOVATIVE LOCKING CONSTRUCTION**



Inside Size	Outside Size	Storage Capacity	Weight Capacity	IP Rating
512X330X133mm	554X418X168mm	22.5L	75LBS	IP65

DA41003 Larger Tool Box

-  **MODULAR DESIGN**
-  **IMPACT RESISTANCE QUALITY**
-  **IP65 WATER PROOF**
-  **INNOVATIVE LOCKING CONSTRUCTION**



Inside Size	Outside Size	Storage Capacity	Weight Capacity	IP Rating
512X253X330mm	554X418X288mm	42.8L	100LBS	IP65

DA41004 Rolling Tool Box

-  **MODULAR DESIGN**
-  **INNOVATIVE LOCKING CONSTRUCTION**
-  **IMPACT RESISTANCE QUALITY**
-  **IP65 WATER PROOF**
-  **9-INCH WHEELS**



Inside Size	Outside Size	Storage Capacity	Weight Capacity	Wheels	IP Rating
560X522X655mm	512X355X330mm	60L	250LBS	9 Inch 230mm	IP65



DX1060 18V BL 50N.m Drill Driver



Brushless Motor



13mm



50N.m




0-450/0-1900/min



Variable Speed



Torque 20+1



LED

FEATURE

- Brushless motor
- Two speed gear box
- Single sleeve metal chuck
- Belt clip
- Variable speed with reverse
- Rubber over mould grip
- Auto spindle lock
- LED light

SPECIFICATIONS

Voltage	18V	Number of clutch positions	20+1
Chuck size	13mm Metal	Max cutting capacity	wood 35mm
No load speed	0-450/0-1900/min		metal 13mm
Max torque	50N.m		



ACCESSORIES

- 2pc 2.0Ah Li-ion battery pack
- 1pc 2A Charger
- 1pc Belt clip
- Injection Box +Color Sticker

DX1010 18V BL 50N.m Impact Drill



Brushless Motor



13mm



50N.m




0-450/0-1900/min



Variable Speed



Torque 20+1+1



LED

FEATURE

- Brushless motor
- Two speed gear box
- Single sleeve metal chuck
- Belt clip
- Variable speed with reverse
- Rubber over mould grip
- Auto spindle lock
- LED light

SPECIFICATIONS

Voltage	18V	Number of clutch positions	20+1+1
Chuck size	13mm Metal	Max cutting capacity	wood 35mm
No load speed	0-450/0-1900/min		metal 13mm
Impact rate	0-7600/0-32000 bpm		concrete 13mm
Max torque	50N.m		



ACCESSORIES

- 2pc 2.0Ah Li-ion battery pack
- 1pc 2A Charger
- 1pc Belt clip
- Injection Box +Color Sticker

DX1040 18V BL 150N.m Impact Drill



Brushless Motor



13mm



150N.m



0-550/0-2000/min



Variable Speed



Torque 20+1+1



LED

FEATURE

- Brushless motor
- Two speed gear box
- Variable speed with reverse
- Auto spindle lock
- Durable auxiliary handles to protect users from kickback
- 150N.m high torque for easy drilling
- Effectively reduce hand-twisting risk in blocking
- Single sleeve metal chuck
- LED light

SPECIFICATIONS

Voltage	18V	Number of clutch positions	20+1+1
Chuck size	13mm	Max cutting capacity	wood 152mm
No load speed	0-550/0-2000/min		metal 13mm
Impact rate	0-10450/38000 bpm		masonry 16mm
Max torque	150N.m		



ACCESSORIES

- 2pc 4.0Ah Battery pack
- 1pc 4A Charger
- 1pc Auxiliary handle
- 1pc Hook
- 1pc Double ended bit BMC+Color box

DX1100 18V BL 65N.m Drill Driver



FEATURE

- Brushless motor
- Two speed gear box
- Single sleeve metal chuck
- Variable speed with reverse
- LED light
- High torque 65N.m for tough application
- Rubber over mould grip
- Auto spindle lock

SPECIFICATIONS

Voltage	18V
Chuck size	13mm
No load speed	0-500/0-2000/min
Max torque	65N.m

Number of clutch positions	18+1
Max cutting capacity	wood 40mm
	metal 13mm

ACCESSORIES

2pc 2.0Ah Li-ion battery pack
1pc 4A Charger
1pc Belt clip
Injection Box+Color box



DX1070 18V 70Nm Compact Drill Driver



FEATURE

- Two speed gear box
- Compact design
- Rubber over mould grip
- Maximum 70Nm of torque
- Convenient belt clip frees your hands for multitasking
- LED light
- With belt clip

SPECIFICATIONS

Voltage	18V
Chuck size	13mm
No load speed	0-500/2100/min
Max torque	10N.m

Number of clutch positions	18+1
Max cutting capacity	wood 40mm
	metal 13mm

ACCESSORIES

2pc 2.0Ah Li-ion battery pack
1pc 2A Charger
1pc Belt clip
BMC +Color Sticker



DX1120 18V BL 65N.m Impact Drill



FEATURE

- Brushless motor
- Two speed gear box
- Single sleeve metal chuck
- Variable speed with reverse
- High torque 65N.m for tough application
- Rubber over mould grip
- Auto spindle lock
- LED light

SPECIFICATIONS

Voltage	18V
Chuck size	13mm
No load speed	0-500/0-2000/min
Impact rate	0-8000/0-32000 bpm
Max torque	65N.m

Number of clutch positions	22+1+1
Max cutting capacity	wood 40mm
	metal 13mm
	masonry 16mm

ACCESSORIES

2pc 2.0Ah Li-ion battery pack
1pc 4A Charger
1pc Belt clip
Injection box+Color box



DX1020 18V 70Nm Compact Impact Drill



FEATURE

- Two speed gear box
- Compact design
- Rubber over mould grip
- Maximum 70Nm of torque
- Convenient belt clip frees your hands for multitasking
- LED light
- With belt clip

SPECIFICATIONS

Voltage	18V
Chuck size	13mm
No load speed	0-500/2100/min
Impact rate	0-7500/31500 bpm
Max torque	70N.m

Number of clutch positions	18+1+1
Max cutting capacity	wood 40mm
	metal 13mm
	masonry 16mm

ACCESSORIES

2pc 2.0Ah Li-ion battery pack
1pc 2A Charger
1pc Belt clip
BMC +Color Sticker



DX1130 18V BL 80N.m Impact Drill



FEATURE

- Brushless motor
- Two speed gear box
- Variable speed with reverse
- Auto spindle lock
- Durable auxiliary handles to protect users from kickback
- High torque 80N.m for tough application
- Rubber over mould grip
- Single sleeve metal chuck
- LED light

SPECIFICATIONS

Voltage	18V
Chuck size	13mm
No load speed	0-550/0-2200/min
Impact rate	0-10450/41800 bpm
Max torque	80N.m

Number of clutch positions	22+1+1
Max cutting capacity	wood 55mm
	metal 13mm
	masonry 16mm

ACCESSORIES

1pc 4.0Ah Battery pack
1pc 4A Charger
1pc Auxiliary handle
1pc Belt clip
Injection box+Color box



DX145 18V 50N.m Drill Driver



FEATURE

- Two speed gear box
- Auto spindle lock
- Rubber over mould grip
- Single sleeve metal chuck
- Variable speed with reverse
- LED light
- With belt clip

SPECIFICATIONS

Voltage	18V
Chuck size	13mm
No load speed	0-400/1600/min
Max torque	50N.m

Number of clutch positions	20+1
Max cutting capacity	wood 35mm
	metal 13mm

ACCESSORIES

1pc 2.0Ah Li-ion battery pack
1pc 2A Charger
1pc Belt clip
1pc Double ended bits (PH2 / SL5.5)
Injection Box +Color Sticker



DX155 18V 50N.m Impact Drill



FEATURE

- Two speed gear box
- Auto spindle lock
- Rubber over mould grip
- Single sleeve metal chuck
- Variable speed with reverse
- LED light
- With belt clip

SPECIFICATIONS

Voltage	18V	Number of clutch positions	20+3
Chuck size	13mm	Max cutting capacity	wood 35mm
No load speed	0-400/0-1600/min		metal 13mm
Impact rate	0-6800/0-27200bpm		concrete 13mm
Max torque	50N.m		



ACCESSORIES

1pc 2.0Ah Li-ion battery pack
1pc 2A Charger
1pc Belt clip
1pc Double ended bits (PH2 / SL5.5)
Injection Box +Color Sticker

DX7030 18V BL 215N.m Impact Driver



FEATURE

- Brushless motor
- Variable speed with reverse
- LED light with Pre-light function for work area
- Convenient belt clip frees your hands for multitasking
- 3-Speed design
- Rubber over mould grip

SPECIFICATIONS

Voltage	18V	Impact rate	0-1600/2900/3600bpm
Chuck size	¼" Hex	Max torque	215N.m
No load speed	0-1300/2100/3200/min		



ACCESSORIES

2pc 2.0Ah Li-ion battery pack
1pc 4A Charger
1pc Belt clip
Injection box+Color box

DX7040B 18V 180N.m Impact Driver



FEATURE

- Rubber over mould grip
- Metal gear box
- Variable speed with reverse
- LED light
- Fitting with CAT battery

SPECIFICATIONS

Voltage	18V
Chuck size	1/4" Hex
No load speed	0-2900/min
Impact rate	0-3000bpm
Max torque	180N.m



ACCESSORIES

1pc Belt clip
Color box

DXK201 18V 2in1 Combo Kit (Impact Drill & Impact Driver)

DX1120



DX7030



FEATURE

- Impact function
- High torque 65N.m for tough application
- Rubber over mould grip
- Single sleeve metal chuck
- Variable speed with reverse

- 3-Speed design
- Variable speed with reverse
- Rubber over mould grip
- LED light with Pre-light function for work area
- Convenient belt clip frees hands for multitasking



DX7060 18V BL 350N.m Impact Wrench



FEATURE

- Brushless motor
- Rubber over mould grip
- Convenient belt clip frees your hands for multitasking
- LED with Pre-light function for work area
- Variable speed with reverse
- 3-Speed design

SPECIFICATIONS

Voltage	18V	Impact rate	0-1300/2900/3600bpm
Chuck size	½"	Max torque	350N.m
No load speed	0-1300/2100/3200rpm		



ACCESSORIES

2pc 4.0Ah Li-ion battery pack
1pc 4A Charger
1pc Belt clip
Injection box+Color box
1pc Steel O ring
1pc Dental pin for Anvil

DX7070B 18V 250N.m Impact Wrench



FEATURE

- Rubber over mould grip
- Metal gear box
- Variable speed with reverse
- LED light

SPECIFICATIONS

Voltage	18V
Chuck size	1/2" Square
No load speed	0-2900/min
Impact rate	0-3000bpm
Max torque	250N.m



ACCESSORIES

1pc Belt clip
Color box

DX7020 18V BL 700N.m Mid Torque Impact Wrench



FEATURE

- Brushless motor
- 4-mode drive control with auto shut-off and bolt removal mode
- Rubber overmould grip
- Friction ring ensures quick and easy socket changes
- Variable speed with reverse
- Tri-LEDs delivers high definition lighting to increase workspace visibility with less shadows
- AI gear box
- Overload protection

SPECIFICATIONS

Voltage	18V	Impact rate	1500/2300/2800bpm
Chuck size	½"	Max breakaway torque	800 N.m
No load speed	1400/2000/2400rpm	Max fastening torque	700 N.m

ACCESSORIES

2pc 4.0Ah Li-ion battery pack
1pc 4A Charger
1pc Belt clip
Injection box +Color box



DX2120B 18V BL 2J SDS Rotary Hammer



FEATURE

- Brushless motor
- SDS-plus quick change system
- 4 in 1 function: drilling, hammering, bit rotation, chisel
- Rubber over mould grip
- Variable speed with reverse
- Compact and light design
- Overload protection
- LED light


SPECIFICATIONS

Voltage	18V	Impact energy	2J
Chuck size	SDS Plus	Max cutting capacity	wood 28mm
No load speed	0-1350/min		metal 13mm
Impact rate	0-4700bpm		concrete 22mm



ACCESSORIES

1pc Auxiliary handle
1pc Metal depth gauge
Color box

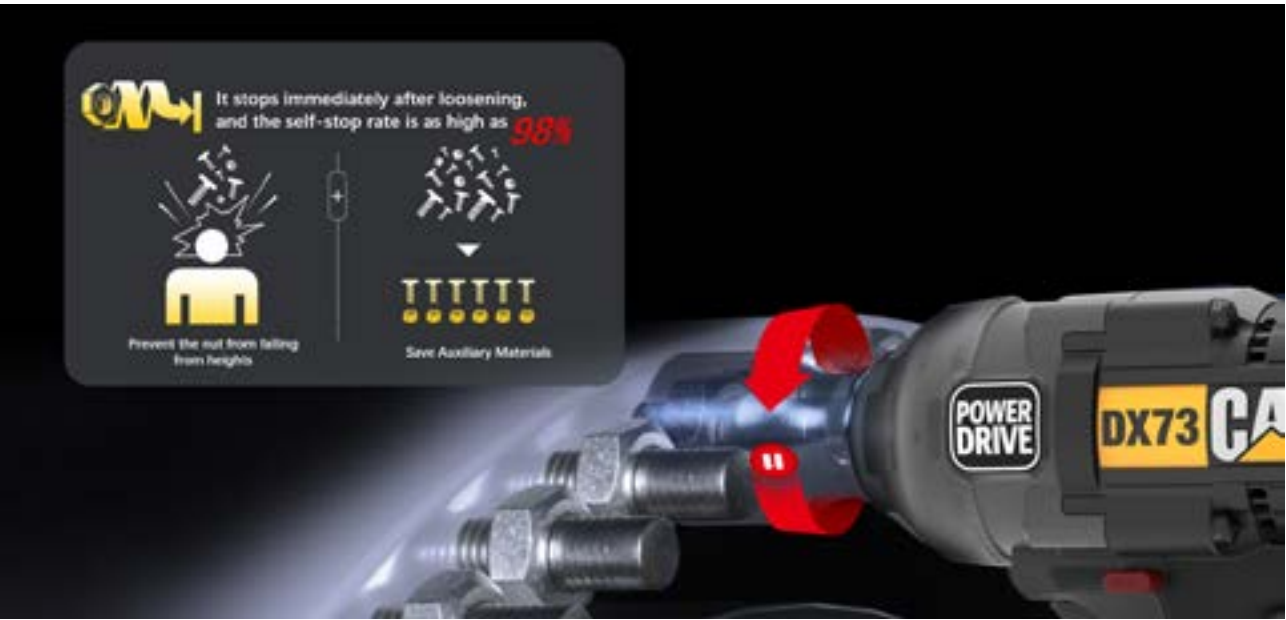

DX2150B 18V BL 2.8J SDS Rotary Hammer



FEATURE

- Brushless motor
- SDS-plus quick change system
- Forward and reverse rotation
- LED light
- Mechanical & electronic dual overload protection
- Variable speed with reverse
- Rubber overmould grip
- Anti-vibration design
- 4 function: hammer drill, bit rotation, chisel, impulse drilling

SPECIFICATIONS

Voltage	18V	Impact force	2.8J
Chuck type	SDS Plus	Max drilling capacity	steel 13mm
No load speed	0-1080/min		wood 32mm
Impact rate	0-4800bpm		concrete 26mm



ACCESSORIES

1pc Auxiliary handle
1pc Metal depth gauge
Color box

DX73B 18V BL 1700N.m High Torque Impact Wrench



FEATURE

- Brushless motor
- Metal gear box with rubber cover
- Variable speed with reverse
- Constant torque function for consistent performance
- Electronic 3-stage impact power selection (Hard/Medium/Soft) with auto stop function in reverse mode
- LED light
- Rubber overmould grip
- Auto stop in nut reverse mode
- Most power torque in same class

SPECIFICATIONS

Voltage	18V	Impact rate	0-1000/1600/2400 bpm
Chuck size	¾"	Max fastening torque	700N.m/1000N.m/1700N.m
No load speed	0-900/1100/1800 /min	Max breakaway torque	800N.m/1100N.m/2100N.m

ACCESSORIES

1pc Belt clip
Color box



DX3130B

18V BL 125mm Angle Grinder



FEATURE

- Brushless motor
- 2 positions auxiliary handle
- Over load protection
- Soft start
- Quick guard adjustment
- Silde on/off switch
- Dust resistant with mesh filters
- Accidental start protection
- Slim body design ensure a secure grip at all times
- Electronic kickback protection technology

SPECIFICATIONS

Voltage	18V	Spindle thread	M14
Disc Size	125mm	Disc bore	22.2mm
No load speed	8500/min	Auxiliary handle position	2

ACCESSORIES

1pc 2 in 1 quick guard
1pc Auxiliary handle
1pc Spanner
Color box
* 100mm/115mm available



DX3010B

18V BL 125mm Angle Grinder



FEATURE

- Brushless motor
- 3 position Anti-vibration auxiliary handle with spanner
- Over load protection
- Soft start
- Quick guard adjustment
- Silde on/off switch
- Dust resistant with mesh filters
- Accidental start protection
- Constant speed
- Slim body design ensure a secure grip at all times
- Electric fast brake
- Electronic kickback protection technology
- Speed control 3000min to max 8600min

SPECIFICATIONS

Voltage	18V	Spindle thread	M14
Disc Size	125mm	Disc bore	22.2mm
No load speed	3000/5000/8600/min	Auxiliary handle position	3

ACCESSORIES

1pc 2 in 1 quick guard
1pc Anti-vibration auxiliary handle
1pc Spanner
Color box
* 100mm/115mm available



DX3140B

18V BL 125mm Angle Grinder



FEATURE

- Brushless motor
- Overload protection
- Soft start
- Tool-less quick safety guard adjustment
- Constant power
- Rubber over mould grip
- Dust resistant with mesh filters
- 3 position Anti-vibration auxiliary handle with spanner
- Slim body design with paddle switch for comfortable user experience

SPECIFICATIONS

Voltage	18V	Spindle thread	M14
Disc Size	125mm	Disc bore	22.2mm
No load speed	8500/min	Auxiliary handle position	3

ACCESSORIES

1pc 2 in 1 quick guard
1pc Anti-vibration auxiliary handle
1pc Spanner
Color box
* 100mm/115mm available



DX5010B

18V BL 120mm Circular Saw



FEATURE

- Brushless motor
- 0-45° bevel cutting adjustment
- Slim body design fits right in your hand
- Hex key on body design
- High no-load speed delivers smooth cut
- LED light for better sight in dark areas
- Spindle lock button for easy blade change
- Quick cutting depth adjustment for easy setting depth
- Multi cutting;Cuts wood,metal,tiles,plasterboard and plastics with ease

SPECIFICATIONS

Voltage	18V	Bevel capacity	0-45°
Blade size	120mm	Max cutting capacity	45° 29.5mm
No load speed	6100/min		90° 41mm
Disc bore size	9.5mm		

ACCESSORIES

1pc TCT Blade(24T) 1pc HCS Blade(60T)
1pc Vacuum adaptor 1pc Parallel guide
1pc Hex key
1pc Diamond Blade(60Grit)
Color box



DX5040B 18V BL 185mm Circular Saw



FEATURE

- Brushless motor
- Spindle lock
- Hex key storage
- Soft start & Overload protection & Electronic brake
- Lock-off switch
- LED light
- Rubber over mould grip
- Magnesium alloy base & Aluminum guard for strong & light weight design

SPECIFICATIONS

Voltage	18V	Bevel capacity	0-56°
Blade size	185mm	Max cutting capacity	45° 46mm
No load speed	8500/min		90° 65mm
Disc bore size	20mm		



ACCESSORIES

1pc Hex key 1pc Dust tube
1pc Vacuum adaptor
1pc 24T TCT blade
1pc Parallel guide
Color box

DX5330B 18V 165mm Circular Saw



FEATURE

- Spindle lock
- Lock off switch
- Rubber over mould grip
- Dust extraction
- Steel base
- Aluminum guard

SPECIFICATIONS

Voltage	18V	Max cutting capacity	45° 38mm
Blade size	165mm		90° 55mm
No load speed	4500/min	Disc bore size	20mm
Bevel capacity	0-50°		



ACCESSORIES

1pc Hex key 1pc Parallel guide
1pc Vacuum adaptor
1pc 24T saw blade
1pc Dust tube
Color box

DX5340B 18V BL 76mm Cut off Tool



FEATURE

- Brushless motor
- Ergonomic design
- Forward and Reverse Switch
- Electric brake and safety switch offer safety protection
- Tool-free guard adjustment
- Can be equipped with dust collection and tool-free depth adjustment guard (optional)
- 3 speed adjustment
- Large cutting depth

SPECIFICATIONS


Voltage	18V	Saw blade hole diameter	10mm
No-load speed	0-8000/14000/20000RPM	Max. cutting capacity	22mm
Saw blade diameter	76mm	Weight	0.9Kg bare



ACCESSORIES

1pc Abrasive cutting blade
1pc Diamond cutting blade
1pc Multi-material cutting blade
1pc Hex wrench
Color box

DX5270B 18V BL 26mm Jig Saw



FEATURE

- Brushless motor
- Tool-free base bevel adjustment
- Rubber over mould grip
- Lock-off switch prevents accidental starting
- 4-Stage Pendulum settings for improved cutting efficiency
- Variable speed
- Tool-free blade change system
- SDS Adjustable base for angle cutting

SPECIFICATIONS

Voltage	18V	Max cutting capacity	wood 120mm
Stroke length	26mm		steel 10mm
No load speed	0-3500/min		PVC pipe 20mm
Bevel capacity	0-45°		



ACCESSORIES

1pc Blade for wood 1pc Vacuum adaptor
1pc Dust adapter 1pc Dust tube
1pc Parallel guide
1pc Base cover
Color box

DX5050B 18V BL 29mm Reciprocating Saw



FEATURE

- Brushless motor
- Aluminum gear box
- Tool-free blade change system
- Tool-Less pivot foot plate adjustment
- Metal rafter hook
- Tool free shoe adjustment
- Variable speed
- Pendulum function
- Rubber over mould grip
- LED light

SPECIFICATIONS

Voltage	18V	Max cutting capacity	wood 300mm
Stroke length	29mm		metal 12mm
No load speed	0-3000/min		



ACCESSORIES

1pc Blade for wood
1pc Rater hook
Color box

DX5060B 18V 20mm Reciprocating Saw



FEATURE

- Variable speed
- Tool-Less pivot foot plate adjustment
- Rubber overmould grip
- Lock off switch
- Tool-Less blade change system
- Tool free shoe adjustment

SPECIFICATIONS

Voltage	18V	Max cutting capacity	steel 10mm
No load speed	0-3000/min		wood 100mm
Stroke length	20mm		



ACCESSORIES

1pc Blade for wood
Color box

DX82B

18V BL Palm Router



- FEATURE
- Brushless Motor with constant speed technology
 - Aluminum base
 - Soft start
 - On/off switch
 - Rubber overmould grip
 - Accidental start protection
 - Variable speed
 - Micro depth adjustment
 - Spindle lock
 - LED light

SPECIFICATIONS

Voltage	18V
Chuck size	¼"
No load speed	10000-30000/min
Plunge depth	38mm



- ACCESSORIES
- 1pc 13mm&17mm double end wrench
 - 1pc Trimmer base(with standard plastic plate)
 - 1pc Straight edge guide
 - 1pc Dust shroud
 - 1pc Vacuum adaptor
 - 1pc Template guide
 - 1pc ¼" Collet
- DA18090
*Not included, need order separately



DX41B

18V BL SDS Oscillating Multi Tool



- FEATURE
- Brushless motor
 - Slim body design
 - Tool less system for changing accessories
 - Universal interface fit for all brand all oscillating accessories
 - Multi-function finishing, detail and corner sanding
 - Variable speed control
 - Rubber over mould grip
 - Dual LED light

SPECIFICATIONS

Voltage	18V
Oscillation angle	4.0°
No load speed	8000-19000/min



- ACCESSORIES
- 9pc Sanding sheet(40#/80#/120#)
 - 1pc HSS segment saw blade
 - 1pc Rigid scraping blade
 - 1pc Sanding base
 - 1pc Wood plunge cutting blade
 - 1pc Metal cutting blade
- Color box

DX43B

18V BL 125mm Rotary Sander



- FEATURE
- Brushless motor
 - Hook and loop system
 - Rubber overmould grip
 - Sanding & polishing 2in1 function
 - Pad brake system
 - Variable speed control
 - Dust collection system
 - On/off switch

SPECIFICATIONS

Voltage	18V
No load speed	8000-12000 /min
Orbital diameter	3.2mm
Base size	125mm



- ACCESSORIES
- 1pc Dust bag
 - 1pc 150mm polishing foam pad
 - 3pc Sanding paper(60#/80#/120#)
- Color box



DX42B

18V 125mm Rotary Sander



- FEATURE
- Sanding and polishing 2 in 1 function
 - Variable speed control
 - On/off switch
 - Pad brake system
 - Rubber over mould grip
 - Hook and loop & clamp system
 - Dust collection system

SPECIFICATIONS

Voltage	18V
Base size	125mm(for Sanding) 150mm(for Polishing)
No load speed	3000-11000/min
Orbital diameter	2.4mm



- ACCESSORIES
- 1pc Dust bag
 - 1pc 150mm polishing foam pad
 - 3pc Sanding paper(60#/80#/120#)
- Color box

DX81B

18V BL Planer



FEATURE

- Brushless motor
 - Right side dust ejection port
 - With Rest stand
 - Micro cutting depth adjustment
 - Rubber over mould grip
- Overload protection
 - Aluminum base with V-groove
 - On board storage space for blade & wrench



SPECIFICATIONS

Voltage	18V	Max rebate depth	8mm
Max cutting depth	2mm	Max cutting width	82mm
No load speed	15500/min		

ACCESSORIES

1pc Rebate guide 1pc Dust bag
1pc Spanner 1pc Hex key
2pc TCT blades on machine
1pc Parallel guide
Color box

DX91B

18V Jobsite Blower



FEATURE

- Powerful with balance performance between air flow rate & air volume flow
- Rubber overmould grip
- ABS housing with TPE over-mould
- Multi-accessories for versatile and flexible



SPECIFICATIONS


Voltage	18V	No load speed	Stage 1 11000RPM
Airflow speed	179MPH / 80m/s		Stage2 15000RPM
Machine weight	1.3Kg Bare		Stage 3 18000RPM

ACCESSORIES

1pc Nozzle
1pc Extension tube
1pc Dust cover
2pc Deep hole nozzle
Color box

DX8090B

18V Heat Gun



FEATURE

- Efficient Heating & Variable Temperature
- Long runtime
- LCD Display & Memory Function
- Overload Protection & Safety Lock



SPECIFICATIONS

Voltage	18V	Air flow	150L/min
Temperature Setting	20°C - 600°C	Machine weight	0.466kg

ACCESSORIES

1pc concentrator nozzle
1pc reflector nozzle
1pc deflector nozzle
Color box

DX62B

18V Jobsite Worklight



FEATURE

- Flood light illumination pattern with Super bright / Energy-saving model
- COB LED light ensures a long service life and minimum heat generation to touch
- Flexible operation-360 degree head rotating to freely adjust lighting angle
- Battery powered and portable handle to carry away
- Sturdy light case for tripod mountable and a variety of other hanging methods
- Sealed water Proof switch



SPECIFICATIONS


Voltage	18V
Rated power	20W
Lumen	750/1600Lumen
Bulb type	LED

ACCESSORIES

Color box

DX63B

18V Spot light



FEATURE

- LED light
 - On/off switch with 2 level lumen setting
 - Wrist Strap
 - Rubber overmould grip
 - Integrated hook for hands-free
 - Adjustable rotate working head
- Magnetic holder



SPECIFICATIONS

Voltage	18V
Brightness	160/400 lumen
Adjustable angle	Rotating -10~95°

ACCESSORIES

Color box

DX6010B

18V Bluetooth Radio



FEATURE

- DAB+/FM/AM (Presets: 30*DAB, 10*FM, 10*AM)
- LCD board with backlight
- USB power output for charging mobile phone
- Aux, Bluetooth input
- Soft Antenna
- Compatible for 18V battery with power adapter



SPECIFICATIONS

Voltage	18V	Bluetooth	5.0
DAB+	Band III 5A-13f 174-240 Mhz	Aux Input Terminal	3.5mm, 2 x Aux port
FM Frequency	87.5-108MHz	USB Port Output	5V 1.0A
AM Frequency	520-1710KHz	Dustproof / Waterproof	IPX4

ACCESSORIES

1pc AC power adaptor
Color box



DX1140 12V BL 38N.m Compact Drill Driver



FEATURE

- Brushless motor
- Two speed gear box
- Single sleeve chuck
- LED battery capacity indicator
- LED light
- Rubber overmould grip
- Super compact design
- Variable speed with reverse
- Auto spindle lock

SPECIFICATIONS

Voltage	12V	Max drilling capacity	steel 10mm
Chuck size	10mm Plastic		wood 25mm
No load speed	0-400/1650 rpm	Clutch position	20+1
Max torque	38N.m		

ACCESSORIES

2pc 2.0Ah Battery pack
1pc 1.5A Charger
Injection box + Color sticker



DX1160 12V BL 38N.m Compact Impact Drill



FEATURE

- Brushless motor
- Two speed gear box
- Single sleeve chuck
- LED battery capacity indicator
- LED light
- Rubber overmould grip
- Super compact design
- Variable speed with reverse
- Auto spindle lock

SPECIFICATIONS

Voltage	12V	Max drilling capacity	steel 10mm
Chuck size	10mm Plastic		wood 25mm
No load speed	0-400/1650 rpm		Concrete 10mm
Impact rate	0-6000/ 0-24750 bpm	Clutch position	20+1+1
Max torque	38N.m		

ACCESSORIES

2pc 2.0Ah Battery pack
1pc 1.5A Charger
Injection box + Color sticker



DX14 12V 30N.m Drill Driver



FEATURE

- Compact and lightweight
- Variable speed with reverse
- Auto spindle lock
- Single sleeve chuck
- LED battery capacity indicator
- Two speed gear box
- LED light
- Rubber over mould grip

SPECIFICATIONS

Voltage	12V	Torque setting position	15+1
Chuck size	10mm	Max cutting capacity	wood 20mm
Max torque	30N.m		metal 8mm
No load speed	0-400/0-1500/min		

ACCESSORIES

1pc 2.0Ah Battery pack
1pc 1.5A Charger
Color box



DX15

12V 30N.m Impact Drill



FEATURE

- Compact and lightweight
- Two speed gear box
- Variable speed with reverse
- Soft grip handle
- LED light
- Auto spindle lock
- Single sleeve chuck

SPECIFICATIONS

Voltage	12V
Chuck size	10mm
Max torque	30N.m
No load speed	0-400/0-1500/min
Impact rate	0-5800/0-22500bpm

Torque setting position	18+1+1
Max cutting capacity	wood 20mm
	metal 8mm
	masonry 8mm



ACCESSORIES

- 1pc 2.0Ah Battery pack
- 1pc 1.5A Charger
- Color box



DX1110S

4V 5N.m Screw Driver



FEATURE

- 7-gear torque adjustment can meet working conditions demand of different torsion force
- 6.35mm hex magnetic quick release
- The reverse button makes it easier to disassemble and assemble
- Battery indicator button for low battery warning
- LED light great for dark areas
- Safety switch to prevent accidental touch

SPECIFICATIONS

Voltage	4V
No-load speed	320/min
Max. torque	5N.m
Chuck size	1/4" hex



ACCESSORIES

- 1pc Magnetic bit holder(60mm)
- 1pc 50 impact bit PH2
- 1pc USB Cable(Type C)
- 24pcs 25mm screwdriver bit
- Injection box + color card



DX2140

800W 3J SDS Plus Rotary Hammer



FEATURE

- SDS-plus chuck
- 4 functions:Drill, Hammer drill, Bit Rotation, Chisel
- Rubber overmould grip
- Lock-on switch
- Over load protection
- Forward and reverse rotation
- Variable speed

SPECIFICATIONS

Model No.	DX2140	DX2140U	Impact rate	0-4900bpm
Power	800W	800W	Impact energy	3J
Voltage	220-240V~50/60Hz	110-127V~50/60Hz	Max cutting capacity	wood 30mm
No-load speed		0-1150/min		masonry 26mm/metal 13mm



ACCESSORIES

- 1pc Rubber auxiliary handle
- 1pc Metal depth gauge
- 1pc SDS drill bit
- BMC+Color box

DX2130

900W 3.2J SDS Plus Rotary Hammer



FEATURE

- SDS-plus chuck
- 4 functions:Drill, Hammer drill, Bit Rotation, Chisel
- Rubber overmould grip
- Lock-on switch
- Forward and reverse rotation
- Over load protection
- Variable speed

SPECIFICATIONS

Model No.	DX2130	DX2130U	Impact energy	3.2J
Power	900W	900W	Max cutting capacity	wood 30mm
Voltage	220-240V~50/60Hz	110-127V~50/60Hz		steel 13mm
No load speed		0-1100/min		masonry 28mm
Impact rate		0-4800bpm		



ACCESSORIES

- 1pc Rubber auxiliary handle
- 1pc Metal depth gauge
- 3pcs SDS drill bits
- 2pcs Point chisels & flat chisels
- BMC+Color box

DX27

1500W 5J SDS Plus Rotary Hammer



FEATURE

- Anti-vibration main handle
- Lock-on switch
- SDS-plus quick-change system
- 4 Functions:Drill, Hammer drill, Bit Rotation, Chisel
- Ball joint cord connection for full protection of power cord
- Metal depth gauge
- Rubber over mould grip
- Variable speed control
- Magnesium alloy gear box

SPECIFICATIONS

Model No.	DX27	DX27U	Impact energy	5J
Power	1500W	1500W	Max cutting capacity	wood 40mm
Voltage	230-240V~50Hz	110-127V~50/60Hz		steel 13mm
No load speed		0-920/min		masonry 32mm
Impact rate		4900bpm	Machine weight	5.7Kg



ACCESSORIES

- 1pc Auxiliary handle
- 1pc Depth gauge
- 1pc Dust cover
- BMC+Color box

DX25

1100W 8.5J SDS Max Rotary Hammer



FEATURE

- Super lightweight but excellent Drilling efficiency
- 2 function: hammering, hammer drilling
- Anti-vibration handle
- Forward and Reverse rotation
- Rubber overmould grip for improved comfort
- Constant speed
- SDS-Max chuck
- Aluminum gear box
- Overload protection
- Auto stop carbon brush

SPECIFICATIONS

Model No.	DX25	DX25U	Impact rate	3950bpm
Power	1100W	1100W	Impact energy	8.5J
Voltage	220-240V~50/60Hz	110-127V~50/60Hz	Capacity	masonry 40mm
No-load speed		580/min	Machine weight	5.3Kg



ACCESSORIES

- 1pc Auxiliary handle
- 1pc Depth gauge
- BMC+Color box



DX28

1100W 10J SDS Max Demolition Hammer



- FEATURE
- Light weight design
 - Hex chuck
 - Rubber over mould grip
 - Auxiliary handle
 - Four finger size big switch with lock-on feature
 - Magnesium alloy gear box

SPECIFICATIONS

Model No.	DX28	DX28U	Impact energy	10J
Power	1100W	1100W	Chuck capacity	Hex 17mm
Voltage	220-240V~50/60Hz	110-127V~60Hz	Machine weight	4.9Kg
Impact rate	3500bpm			



- ACCESSORIES
- 1pc Auxiliary handle
 - 1pc Spanner
 - 1pc Dust cap
 - BMC+Color box

DX2010

1200W 15J SDS Max Demolition Hammer



- FEATURE
- Lock-on switch
 - SDS-Max chuck
 - Anti-vibration design
 - Larger touchable trigger to easy control
 - Ball joint cord connection for full protection of power cord

SPECIFICATIONS

Model No.	DX2010	DX2010U	Impact rate	3500bpm
Power	1200W	1200W	Impact energy	15J
Voltage	220-240V~50/60Hz	110-127V~60Hz	Machine weight	6.1Kg



- ACCESSORIES
- 1pc Spanner
 - 1pc Plastic container grease
 - 1pc Auxiliary handle
 - BMC+Color box

DX2170

1500W 25J 10kg Demolition Hammer



- FEATURE
- Powerful 1500W motor delivers 25J of impact energy to handle the most demanding applications
 - Anti-vibration design
 - Variable speed
 - Lock-on switch

SPECIFICATIONS

Model No.	DX2170	DX2170U	Impact rate	0-1900bpm
Power	1500W	1500W	Impact energy	25J
Voltage	220-240V~50/60Hz	110-127V~60Hz	Machine weight	13.7Kg



- ACCESSORIES
- 1pc Auxiliary handle
 - 1pc Flat Chisel
 - 1pc Point Chisel
 - 1pc Grease
 - BMC+Color box

DX29

1750W 50J Demolition Hammer



- FEATURE
- Excellent Impact force
 - Constant Speed to prolong motor life
 - Auto-stop carbon brushes
 - Service reminder light
 - Magnesium gear box
 - Triple Anti-vibration to maximum enhanced comfortability

SPECIFICATIONS

Model No.	DX29	DX29U	Impact energy	50J
Power	1750W	1750W	Chuck capacity	Hex 30mm
Voltage	220-240V~50/60Hz	110-127V~60Hz	Machine weight	14.9Kg
Impact rate	1620bpm			



- ACCESSORIES
- 1pc Flat chisel
 - 1pc Auxiliary handle
 - 1pc Grease tube
 - BMC+Color box
 - 1pc Point chisel
 - 1pc Wiping cloth

DX18

2400W 180mm Diamond Core Drill



- FEATURE
- Lock off switch
 - Rubber overmould grip
 - Variable speed trigger
 - Mechanical & electronic dual overload protection
 - Electric leakage protection
 - Also could work with Rig

SPECIFICATIONS

Power	2400W
No load speed	1400/min
Max Drilling Dia.	Bricks 180mm
	Concrete 102mm
Collet size	1- 1/4" UNC



- ACCESSORIES
- 1pc Shoulder bracket
 - 1pc Auxiliary handle
 - 1pair Carbon brush
 - 1pc Hex wrench
 - Color box

DX19S

3200W 230mm Diamond Core Drill



- FEATURE
- Metal housing and steel gears for optimum durability
 - Lock off switch
 - Rubber overmould grip
 - Mechanical overload protection
 - Handles for easier to carry
 - Electric leakage protection

SPECIFICATIONS

Power	3200W	Max Drilling Dia.	Bricks 230mm
No-load speed	580/min		Concrete 127mm
Collet size	1- 1/4" UNC		



- ACCESSORIES
- 1pc Rig stand set
 - 1pair Carbon brush
 - 1pc Hex wrench
 - Color box

DX175 600W 13mm Impact Drill



FEATURE

- Forward and reverse rotation
- Variable speed switch
- Lock-on switch
- Rubber over mould grip
- Plastic depth gauge

SPECIFICATIONS

Model No.	DX175	DX175U	Chuck size	13mm
Power	600W	600W	Max drilling capacity	wood 25mm
Voltage	220-240V~50/60Hz	110-127V~50/60Hz		metal 10mm
No-load speed		0-3000/min		masonry 13mm
Impact rate		0-48000bpm	Machine weight	1.55Kg



ACCESSORIES

1pc Auxiliary handle
1pc Depth gauge
1pc Chuck key
Color box

DX17 750W 13mm Impact Drill



FEATURE

- Forward and reverse rotation
- Variable speed switch
- Lock-on switch
- Rubber over mould grip
- Metal depth gauge

SPECIFICATIONS

Model No.	DX17	DX17U	Chuck size	13mm
Power	750W	750W	Max cutting capacity	wood 30mm
Voltage	220-240V~50/60Hz	110-127V~50/60Hz		steel 13mm
No load speed		0-3000/min		masonry 16mm
Impact rate		0-48000bpm	Machine weight	1.8Kg



ACCESSORIES

1pc Auxiliary handle
1pc Chuck key
1pc Depth gauge
Color box

DX16 850W 13mm Impact Drill



FEATURE

- Lock-on switch
- Forward and reverse rotation
- Variable speed switch
- Rubber over mould grip
- Metal depth gauge
- Aluminium gear box
- Metal keyless chuck

SPECIFICATIONS

Model No.	DX16	DX161U	Impact rate	0-48000bpm
Power	850W	850W	Max cutting capacity	wood 35mm
Voltage	230-240V~50Hz	120V~60Hz		steel 13mm
Chuck size		13mm metal keyless		masonry 20mm
No load speed		0-3000/min	Machine weight	2.45Kg



ACCESSORIES

1pc Auxiliary handle
1pc Metal depth gauge
Color box

DX1150 450W 10mm Hand Drill



FEATURE

- Forward and reverse rotation
- Ergonomic soft grip for fatigue-free drilling
- Practical belt clip for easy handing
- Variable speed control
- Slim and compact rotary drill with a powerful motor
- Keyed chuck

SPECIFICATIONS

Model No.	DX1150	DX1150U	Chuck type	Keyed
Power	450W	450W	Max. drilling capacity	wood 25mm
Voltage	220-240V~50/60Hz	120V~60Hz		steel 10mm
Chuck size		10mm	Machine weight	1.3kg
No load speed		0-2900/min		



ACCESSORIES

1pc Chuck key
Color box

DX3091 720W 125mm Angle Grinder (Basic model)



FEATURE

- Slim handle design ensures a secure grip at all times
- Slide on-off switch
- Spindle lock
- Accidental restart protection

SPECIFICATIONS

Model No.	DX3091	DX3091U	No-load speed	12000/min
Power	720W	720W	Disc size	125mm
Voltage	220-240V~50/60Hz	110-127V~50/60Hz	Disc bore	22.2mm



ACCESSORIES

1pc Auxiliary handle
1pc Wheel guard for grinding
1pc Spanner
Color box
* 100/115mm Available

DX3090 720W 125mm Angle Grinder (Deluxe Mode)



FEATURE

- Slim handle design ensures a secure grip at all times
- Slide on-off switch
- Spindle lock
- Accidental restart protection
- 2in1 normal change guard

SPECIFICATIONS

Model No.	DX3090	DX3090U	No-load speed	12000/min
Power	720W	720W	Disc size	125mm
Voltage	220-240V~50/60Hz	110-127V~50/60Hz	Disc bore	22.2mm



ACCESSORIES

1pc Auxiliary handle
1pc 2in1 guard
Color box
* 100/115mm Available

1pair Extra carbon brush
1pc Spanner

DX372

750W 100mm Angle Grinder (Basic model)



FEATURE

- Slide on/off switch
- Spindle lock
- Slim body design
- Auto stop brush
- Detachable grating prevents damage from debris
- Improved ventilation system to quick cool motor working temperature

SPECIFICATIONS

Model No.	DX372	DX372U	Spindle thread	M10
Power	750W	750W	Disc size	100mm
Voltage	220-240V~50/60Hz	110-127V~50/60Hz	Disc bore	16mm
No load speed	12000/min		Machine weight	1.5Kg



ACCESSORIES

1pc Wheel guard for grinding
1pc Auxiliary handle
1pc Spanner
Color box



DX371

750W 115mm Angle Grinder (Basic model)



FEATURE

- Slim body design
- Slide on/off switch
- Spindle lock
- Auto stop brush
- Detachable grating prevents damage from debris
- Improved ventilation system to quick cool motor working temperature

SPECIFICATIONS

Model No.	DX371	DX371U	Spindle thread	M14
Power	750W	750W	Disc size	115mm
Voltage	220-240V~50/60Hz	110-127V~50/60Hz	Disc bore	22.2mm
No load speed	12000/min		Machine weight	1.5Kg



ACCESSORIES

1pc Wheel guard for grinding
1pc Auxiliary handle
1pc Spanner
Color box

DX37.1

750W 115mm Angle Grinder (Deluxe Mode)



FEATURE

- Slide on/off switch with accidental start protection*
- Anti-vibration auxiliary handle*
- Quick guard adjustment
- Detachable grating prevents damage from debris
- Spanner storage on auxiliary handle
- Improved ventilation system to quick cool motor working temperature
- Spindle lock
- Slim body design

SPECIFICATIONS

Model No.	DX37.1	DX37U	Spindle thread	M14
Power	750W	750W	Disc size	115mm
Voltage	220-240V~50/60Hz	110-127V~50/60Hz	Disc bore	22.2mm
No load speed	12000/min		Machine weight	1.5Kg



ACCESSORIES

1pc 2in1 guard
1pc Anti-vibration auxiliary handle*
1pc Spanner
Color box

DX371.2

750W 125mm Angle Grinder (Basic model)



FEATURE

- Slim body design
- Slide on/off switch
- Spindle lock
- Auto stop brush
- Detachable grating prevents damage from debris
- Improved ventilation system to quick cool motor working temperature

SPECIFICATIONS

Model No.	DX371.2	DX371.2U	Spindle thread	M14
Power	750W	750W	Disc size	125mm
Voltage	220-240V~50/60Hz	110-127V~50/60Hz	Disc bore	22.2mm
No load speed	12000/min		Machine weight	1.5Kg



ACCESSORIES

1pc Wheel guard for grinding
1pc Auxiliary handle
1pc Spanner
Color box

DX373.1

750W 125mm Angle Grinder (Deluxe Mode)



FEATURE

- Slide on/off switch with accidental start protection*
- Anti-vibration auxiliary handle*
- Quick guard adjustment
- Slim body design
- Detachable grating prevents damage from debris
- Improved ventilation system to quick cool motor working temperature
- Spindle lock

SPECIFICATIONS

Model No.	DX373.1	DX373U	Spindle thread	M14
Power	750W	750W	Disc size	125mm
Voltage	220-240V~50/60Hz	110-127V~50/60Hz	Disc bore	22.2mm
No load speed	12000/min		Machine weight	1.5Kg



ACCESSORIES

1pc 2in1 quick guard
1pc Anti-vibration auxiliary handle*
1pc Spanner
Color box

DX331

900W 125mm Angle Grinder (Basic model)



- FEATURE
- Spindle lock
 - Auto stop brush
 - Slim body design
 - Slide on/off switch
 - Improved ventilation system for quickly cooling down temperture
 - 2-position auxiliary handle
 - Tool-free adjustable guard

SPECIFICATIONS

Model No.	DX331	DX331U	Spindle thread	M14
Power	900W	900W	Disc size	125mm
Voltage	220-240V~50/60Hz	110-127V~50/60Hz	Disc bore	22.2mm
No load speed	12000/min		Machine weight	1.8Kg



- ACCESSORIES
- 1pc Quick change guard for grinding
 - 1pc Auxiliary handle
 - 1pc Wrench
 - Color box
 - * 100mm Available

DX33

900W 125mm Angle Grinder (Deluxe Mode)



- FEATURE
- Spindle lock
 - With accidental start protection*
 - Slim body design
 - Spanner storage on auxiliary handle
 - Slide on/off switch
 - Improved ventilation system for quickly cooling down temperture
 - 2-position auxiliary handle
 - Tool-free adjustable guard

SPECIFICATIONS

Model No.	DX33	DX33U	Spindle thread	M14
Power	900W	900W	Disc size	125mm
Voltage	220-240V~50/60Hz	110-127V~50/60Hz	Disc bore	22.2mm
No load speed	12000/min		Machine weight	1.8Kg



- ACCESSORIES
- 1pc 2in1 guard
 - 1pc Anti-vibration auxiliary handle*
 - 1pc Spanner
 - Color box



DX36

1200W 125mm Angle Grinder



- FEATURE
- Quick guard adjustment
 - Spindle lock
 - Anti-vibration auxiliary handle
 - Spanner storage on auxiliary handle
 - Ball joint cord connection for full protection of power cord

SPECIFICATIONS

Model No.	DX36	DX36U	Spindle thread	M14
Power	1200W	1200W	Disc size	125mm
Voltage	220-240V~50/60Hz	110-127V~50/60Hz	Disc bore	22.2mm
No load speed	10000/min		Machine weight	2.59Kg



- ACCESSORIES
- 1pc Wheel guard for cutting
 - 1pc Wheel guard for grinding
 - 1pc Anti-vibration auxiliary handle
 - 1pc Spanner
 - Color box
 - * DX361U for 125mm angle grinder with constant speed.

DX3061

1200W 125mm Angle Grinder (Basic model)



- FEATURE
- Quick guard adjustment
 - Slide on/off switch
 - Soft start
 - Auto stop brush
 - Slim handle design ensures a secure grip at all times

SPECIFICATIONS

Model No.	DX3061	DX3061U	Spindle thread	M14
Power	1200W	1200W	Disc size	125mm
Voltage	220-240V~50/60Hz	110-127V~50/60Hz	Disc bore	22.2mm
No load speed	12000/min			



- ACCESSORIES
- 1pc Auxiliary handle
 - 1pc Spanner
 - 1pc Quick change guard for grinding
 - Color box
 - * 100/115mm Available

DX3060

1200W 125mm Angle Grinder (Deluxe Mode)



- FEATURE
- Quick guard adjustment
 - Slide on/off switch
 - Soft start
 - Auto stop brush
 - Restart protection
 - One hand use
 - Spanner storage on auxiliary handle
 - Anti-vibration auxiliary handle

SPECIFICATIONS

Model No.	DX3060	DX3060U	Spindle thread	M14
Power	1200W	1200W	Disc size	125mm
Voltage	220-240V~50/60Hz	110-127V~50/60Hz	Disc bore	22.2mm
No load speed	12000/min			



- ACCESSORIES
- 1pc Anti-vibration auxiliary handle
 - 1pc 2 in 1 quick guard
 - 1pc Spanner
 - Color box
 - * 100/115mm Available

DX3066

1400W 125mm Angle Grinder (Basic model)



FEATURE

- Slim handle design ensures a secure grip at all times
 - Quick guard adjustment
 - Slide on/off switch
 - Overload protection
 - Auto stop brush
 - Variable speed 2800-12000/min.6 stages
- Soft start



SPECIFICATIONS

Model No.	DX3066	DX3066U
Power	1400W	1400W
Voltage	220-240V~50/60Hz	110-127V~50/60Hz
No load speed	2800-12000 /min	

Spindle thread	M14
Disc size	125mm
Disc bore	22.2mm

ACCESSORIES

1pc Auxiliary handle
1pc Spanner
1pc Quick change guard for grinding
Color box
* 100/115mm Available

DX3065

1400W 125mm Angle Grinder (Deluxe Mode)



FEATURE

- Slim handle design ensures a secure grip at all times
 - Quick guard adjustment
 - Overload protection
 - Auto stop brush
 - Anti-vibration auxiliary handle
 - Variable speed 2800-12000/min.6 stages
- Slide on/off switch
 - Soft start
 - Accidental start protection
 - Spanner storage on auxiliary handle



SPECIFICATIONS

Model No.	DX3065	DX3065U
Power	1400W	1400W
Voltage	220-240V~50/60Hz	110-127V~50/60Hz
No load speed	2800-12000 /min	

Spindle thread	M14
Disc size	125mm
Disc bore	22.2mm

ACCESSORIES

1pc 2 in 1 quick guard
1pc Spanner
1pc Anti-vibration auxiliary handle
Color box
* 100/115mm Available

DX352

2350W 180mm Angle Grinder



FEATURE

- Lock-off switch
 - Quick guard adjustment
 - Rubber over mould grip
 - External carbon brush change
 - Ball joint cord connection for full protection of power cord
- Soft grip rear handle
 - Anti-vibration auxiliary handle
 - Rotating rear handle
 - Spindle lock



SPECIFICATIONS

Model No.	DX352	DX352U
Power	2350W	2350W
Voltage	220-240V~50/60Hz	110-127V~50/60Hz
No load speed	8500/min	

Spindle thread	M14
Disc size	180mm
Disc bore	22.2mm
Machine weight	5.7Kg

ACCESSORIES

1pc Quick change guard for grinding
1pc Spanner
1pc Anti-vibration auxiliary handle
Color box

DX351

2350W 230mm Angle Grinder (Basic model)



FEATURE

- Lock off switch
 - Quick guard adjustment
 - Spindle lock
 - External carbon brush change
 - Ball joint cord connection for full protection of power cord
- Soft grip rear handle
 - Rubber over mould grip
 - Rotating rear handle



SPECIFICATIONS

Model No.	DX351	DX351U
Power	2350W	2350W
Voltage	220-240V~50/60Hz	110-127V~50/60Hz
No load speed	6500/min	

Spindle thread	M14
Disc size	230mm
Disc bore	22.2mm
Machine weight	5.7Kg

ACCESSORIES

1pc Anti-vibration auxiliary handle
1pc Spanner
1pc Quick change guard for grinding
Color box

DX35

2350W 230mm Angle Grinder (Deluxe Mode)



FEATURE

- Lock off switch
 - Soft start
 - Spindle lock
 - Rotating rear handle
 - Side on-off switch with accidental start protection
 - Ball joint cord connection for full protection of power cord
- Quick guard adjustment
 - Anti-vibration auxiliary handle
 - Rubber over mould grip
 - Soft grip rear handle
 - External carbon brush change



SPECIFICATIONS

Model No.	DX35.1	DX35U.1
Power	2350W	2350W
Voltage	230-240V~50Hz	110-127V~50/60Hz
No load speed	6500/min	

Spindle thread	M14
Disc size	230mm
Disc bore	22.2mm
Machine weight	5.7Kg

ACCESSORIES

1pc 2in1 guard
1pc Wrench
1pc Anti-vibration auxiliary handle
Color box

DX5180

2400W 355mm Cut Off Saw



FEATURE

- Quick release material clamping system
- Whole blade guard
- External brush change
- Spindle lock
- 2400W high performance powerful motor



SPECIFICATIONS

Model No.	DX5180	DX5180U
Power	2400W	2400W
Voltage	220-240V~50/60Hz	110-127V~50/60Hz
No load speed	4000/min	
Blade size	355mm	

Disc bore size	25.4mm
Max cutting capacity	Round steel 100mm
Square steel 0°:100*100mm;45°:95*95mm	
Angle steel 0°:125*125mm;45°:80*80mm	
Rectangle steel 0°:80*190mm;45°:90*95mm	

ACCESSORIES

1pc Cutting disc
1pc Spanner
Color box

DX55

1400W 110mm Tile Cutter



FEATURE

- 1400W High power motor
- Cutting depth adjustable
- External carbon brush change
- 0-45°Angle adjustment
- Lock-on switch

SPECIFICATIONS

Model No.	DX55	DX55U
Power	1400W	1400W
Voltage	220-240V~50/60Hz	110-127V~50/60Hz
Disc size	110mm	
No load speed	13800/min	

Disc bore	20mm
Max cutting depth	45° 19.5mm
	90° 33.0mm
Machine weight	2.9Kg



ACCESSORIES

1pc Spanner 1pc Rubber tap connector
1pc Socket wrench
1pc Plastic nozzle
1pc Water hose(2m)
1pc Screw
Color box

DX5280

1400W 185mm Circular Saw



FEATURE

- Spindle lock
- Dust extraction system
- Rubber overmould grip
- Aluminum upper and lower guards
- Steel base
- External carbon brush
- Lock-off switch

SPECIFICATIONS

Model No.	DX5280	DX5280U
Power	1400W	1400W
Voltage	220-240V~50/60Hz	110-127V~50/60Hz
No load speed	6000/min	

Blade size	185mm
Bevel capacity	0-45°
Max cutting capacity	45° 48mm
	90° 64mm



ACCESSORIES

1pc Parallel guide 1pc Hex key
1pc Blade 185mm 24T
1pc Dust vacuum tube
1pc Dust vacuum adaptor
Color box

DX56

1800W 185mm Circular Saw



FEATURE

- Spindle lock
- Magnesium base plate & guard
- Built in rafter hook for easy storage
- Rubber over mold grip design on handle
- Bevel track
- Ball joint cord connection for full protection of power cord
- Lock-off switch
- LED light
- Dust blower
- Electric brake
- Rafter hook

SPECIFICATIONS

Model No.	DX56	DX56U
Power	1800W	1800W
Voltage	230-240V~50Hz	120V~60Hz
No load speed	6000/min	

Blade size	185mm
Bevel capacity	0-56°
Max cutting capacity	45° 45mm
	90° 65mm



ACCESSORIES

1pc Parallel guide
1pc Hex key
1pc Blade 185mm 24T
1pc Rafter hook
1pc Vacuum adapter
Color box

DX5310

550W 18mm Jig Saw



FEATURE

- Variable speed
- Adjustable base for angle cutting
- 4 position pendulum function
- LED light
- Tool-less blade change system
- Steel base
- Rubber overmould grip

SPECIFICATIONS

Model No.	DX5310	DX5310U
Power	550W	550W
Voltage	220-240V~50/60Hz	110-127V~50/60Hz
No load speed	800-3000/min	
Stoke length	18mm	

Bevel capacity	±45°
Max cutting capacity	Wood 65mm
	Steel 6mm
	Aluminum 65mm
Pendulum function	4 stages



ACCESSORIES

1pc Dust vacuum tube
1pc Dust vacuum adaptor
1pc Hex key
Color box

DX54

750W 20mm Jig Saw



FEATURE

- 4 Position pendulum function
- Aluminum base plate
- Variable speed
- Rubber over mould grip
- LED light
- Lock on switch
- Tool-less blade change system
- Dust blower function

SPECIFICATIONS

Model No.	DX54	DX54U
Power	750W	750W
Voltage	220-240V~50/60Hz	110-127V~50/60Hz
No load speed	800-3000/min	
Stoke length	20mm	

Bevel capacity	±45°
Max cutting capacity	Wood 80mm
	Steel 10mm
	Aluminum 20mm
Machine weight	2.3Kg



ACCESSORIES

1pc Vacuum adapter
1pc Plastic foot plate protection
1pc Parallel guide
1pc Wood cutting blade
1pc Metal cutting blade
Color box

DX5110

780W 26mm Jig Saw



FEATURE

- Aluminum gear box
- 4 Position pendulum function
- Bevel Capacity 0-45° Left and Right
- Tool-less base bevel adjustment
- Tool-less blade change system
- Ball Joint Cord Connection For Full Protection Of Power Cord

SPECIFICATIONS

Model No.	DX5110	DX5110U
Power	780W	780W
Voltage	220-240V~50Hz	120-127V~50/60Hz
No load speed	800-3100/min	
Stoke length	26mm	

Bevel capacity	0-45°
Max cutting capacity	Wood 100mm
	Steel 10mm
	Aluminum 25mm
Machine weight	3.1Kg



ACCESSORIES

1pc Vacuum adapter
1pc Parallel guide
1pc Wood cutting blade
Color box

DX5320

850W 28mm Reciprocating Saw



FEATURE

- Tool-Less blade change system
- Adjustable pivot foot plate
- Rubber overmould grip
- Variable speed
- Aluminum gear box

SPECIFICATIONS

Power	850W	Stoke length	28mm
Voltage	220-230V~50/60Hz	Max cutting capacity	Wood 115mm
No load speed	0-2800/min		Steel 10mm



ACCESSORIES

1pc Blade for wood 230mm
Color box

DX5120

1200W 30mm Reciprocating Saw



FEATURE

- Aluminium gear box
- Variable speed
- LED light
- Lock on switch
- Rubber over mould grip
- Tool-Less pivot foot plate adjustment
- Tool-Less blade change system
- Pendulum function
- Built in rafter hook for easy storage
- Roller ball joint cord connection cord

SPECIFICATIONS

Model No.	DX5120	DX5120U	Max cutting capacity	Wood 300mm
Power	1200W	1200W		Steel 12mm
Voltage	220-240V~50/60Hz	120V~60Hz		Plastic 150mm
No load speed		0-2800/min	Machine weight	3.7Kg
Stoke length		30mm		



ACCESSORIES

1pc Blade for wood
1pc Rafter hook
Color box

DX89

2100W Router



FEATURE

- Soft start
- Spindle lock
- Soft grip handle
- 8 Position preset plunge depth stop
- Dust extraction port
- Lock off switch
- Micro depth adjustment
- Constant speed control
- Aluminium base
- Ergonomic design
- Variable speed

SPECIFICATIONS

Model No.	DX89	DX89U	Collet size	1/2" & 3/8" & 1/4"
Power	2100W	2100W		(6mm&8mm&12mm for EU)
Voltage	220-230V~50/60Hz	120-127V~50/60Hz	Machine weight	4.3Kg
No load speed		11500-28000/min		
Max plunge depth		60mm		



ACCESSORIES

1pc Center pin
1pc Parallel guide
2pc Guide bushes
3pc Collets
Color box
1pc Spanner
1pc Dust extraction tube
1pc Router mat

DX5200

2000W 255mm Sliding Miter Saw



FEATURE

- Sliding function
- High performance powerful motor
- Aluminum base
- Spindle lock
- Transparent movable guard
- Electric brake

SPECIFICATIONS

Model No.	DX5200	DX5200U	Disc bore size	25.4mm
Power	2000W	2000W	Max cutting capacity	Round steel 100mm
Voltage	220-240V~50/60Hz	110-127V~50/60Hz		0° x 90°: 80*320mm
No load speed		5200/min		0°x 45°: 42*320mm
Blade size		255mm		45°x45°: 42*210mm



ACCESSORIES

1pc Blade
1pc Work clamp
1pc Dust bag
2pc Extension rail
Color box

DX49.1

350W SDS Oscillation tool



FEATURE

- Slide on/off switch
- LED light
- Rubber over mould grip
- Multi function: sawing, scraping, sanding etc
- Universal interface fit for all brand oscillating blade
- Tool-free accessory change system
- Variable speed provides great control on various materials
- Aluminium gear box for durability and prolonged life
- Variable speed control

SPECIFICATIONS

Model No.	DX49.1	DX49U	Oscillations Angle	3.2°
Power	350W	350W	Machine weight	1.6Kg
Voltage	230-240V~50Hz	120V~60Hz		
No load speed		11000-20000/min		

* DX49 for 350W SDS oscillation tool with color box only.



ACCESSORIES

1pc Rigid scraping blade
9pc Sanding sheet
1pc HSS segment saw blade
1pc Sanding base
1pc Metal cutting blade
1pc Precise wood cutting blade
Injection Plastic Box + Color box
2pc Plastic box

DX86

900W 3mm Planer



FEATURE

- Left or right side dust and chip extraction
- Aluminium base with V-groove
- Soft grip handle
- Micro Cutting depth adjustment
- Dust extraction port

SPECIFICATIONS

Model No.	DX86	DX86U	Max cutting depth	3mm
Power	900W	900W	Max rebate depth	16mm
Voltage	220-240V~50Hz	110-127V~50/60Hz	Max cutting width	82mm
No load speed		16000/min	Machine weight	2.8Kg



ACCESSORIES

1pc Parallel guide
2pc Blades on machine
1pc Spanner
1pc Rebate guide
1pc Dust bag
Color box



DX46

400W 125mm Rotary Sander

FEATURE

- Patented Cyclone dust collection box
- Dust extraction system
- Dust sealed switch
- Hook and loop system
- Variable speed control
- Ball joint cord connection for full protection of power cord
- With brake function
- Rubber over mould grip

SPECIFICATIONS

Model No.	DX46	DX46U
Power	400W	400W
Voltage	230-240V~50Hz	110-127V~50/60Hz
No load speed	5000-14000/min	5000-12000/min

Base diameter	125mm
Orbital diameter	2.5mm
Machine weight	1.6Kg

ACCESSORIES

1pc Cyclone box
1pc Velcro sanding paper
1pc Vacuum adapter
Color box



DX48

950W Belt Sander

FEATURE

- Belt centering system adjustment
- Dust Collection System
- Rubber over mould grip
- Variable speed control
- Lock on switch
- Quick release belt change

SPECIFICATIONS

Model No.	DX48	DX48U
Power	950W	950W
Voltage	230-240V~50Hz	120V~60Hz
No load speed		240-350/min

Belt size	76x533mm
Grinding size	76x130mm
Machine weight	3.1Kg

ACCESSORIES

1pc Dust bag
1pc Sanding belt
1pc Vacuum adapter
Color box

DX461

400W 125mm Rotary Sander

FEATURE

- With brake function
- Variable speed control
- Dust sealed switch
- Hook and loop system
- Ball joint cord connection for full protection of power cord
- Dust extraction system
- Rubber over mould grip

SPECIFICATIONS

Model No.	DX461	DX461U
Power	400W	400W
Voltage	230-240V~50Hz	110-127V~50/60Hz
No load speed		5000-14000/min


Base diameter	125mm
Orbital diameter	2.5mm
Machine weight	1.6Kg

ACCESSORIES

1pc Dust bag
1pc Velcro sanding paper
1pc Vacuum adapter
Color box



DX47 240W 1/4 Sheet Palm Sander



FEATURE

- Patented Cyclone dust collection box
- Hook and loop & Quick clamp system
- Dust sealed switch
- Dust extraction system
- Ball joint cord connection for full protection of power cord

SPECIFICATIONS

Model No.	DX47	DX47U	Base size	103x110mm
Power	240W	240W	Orbital diameter	1.6mm
Voltage	230-240V~50Hz	110-127V~50/60Hz	Machine weight	1.28Kg
No load speed	15000/min			



ACCESSORIES

1pc Cyclone box
1pc Sanding paper
1pc Paper punch
1pc Vacuum adapter
Color box

DX471 240W 1/4 Sheet Palm Sander



FEATURE

- Hook and loop & Quick clamp system
- Dust collection system
- Dust sealed switch
- Dust extraction system
- Ball joint cord connection for full protection of power cord

SPECIFICATIONS

Model No.	DX471	DX471U	Base size	103x110mm
Power	240W	240W	Orbital diameter	1.6mm
Voltage	230-240V~50Hz	110-127V~50/60Hz	Machine weight	1.28Kg
No load speed	15000/min			



ACCESSORIES

1pc Dust bag
1pc Sanding paper
1pc Paper punch
1pc Vacuum adapter
Color box

DX45 240W 1/3 Sheet Sander



FEATURE

- Patented Cyclone dust collection box
- Hook and loop & Quick clamp system
- Aluminium base
- Variable speed control
- Slide on/off switch

SPECIFICATIONS

Model No.	DX45	DX45U	Base size	90x187mm
Power	240W	240W	Orbital diameter	1.6mm
Voltage	230-240V~50Hz	110-127V~50/60Hz	Machine weight	1.63Kg
No load speed	6000-11000/min	6000-12000/min		



ACCESSORIES

1pc Cyclone box
1pc Sanding paper
1pc Paper punch
1pc Vacuum adapter
Color box

DX44 350W 1/2 Sheet Sander



FEATURE

- Patented Cyclone dust collection box
- Hook and loop & Quick clamp system
- Aluminium base
- Slide on/off switch
- Variable speed control

SPECIFICATIONS

Model No.	DX44	DX44U	Base size	113x230mm
Power	350W	350W	Orbital diameter	2.4mm
Voltage	230-240V~50Hz	110-127V~50/60Hz	Machine weight	2.15Kg
No load speed	6000-11000/min			



ACCESSORIES

1pc Cyclone box
1pc 80 Grit sanding paper
1pc Paper punch
1pc Vacuum adapter
Color box

DX3030 1450W 180mm Car Polisher



FEATURE

- Constant speed control
- Rubber over mould grip
- Spindle lock
- Lock on switch
- External brush change
- Ball Joint Cord Connection For Full Protection Of Power Cord

SPECIFICATIONS

Model No.	DX3030	DX3030U	Disc size	180mm
Power	1450W	1450W	Spindle thread	M14
Voltage	220-240V~50/60Hz	120-127V~50/60Hz	Machine weight	3.27Kg
No load speed	1000-3100/min			



ACCESSORIES

1pc Auxiliary handle 1pc Hex key
1pc Polishing pad
3pc Sanding papers
1pc Velcro pad
1pc Waxing pad
Color box

DX87 2000W Heat Gun



FEATURE

- D-handle
- Rubber over mould grip
- LED light
- 2 Positon airflow
- Stepless temperature adjustment
- Built-in work support stand
- LCD display

SPECIFICATIONS

Model No.	DX87	DX87U
Power	2000W	2000W
Voltage	230-240V~50Hz	110-127V~50/60Hz
Temp range		50-600°C

Air flow rate	I 300L/min
	II 500L/min
Machine weight	0.91Kg

ACCESSORIES

1pc Scraper 1pc Flat nozzle
1pc Glass protection nozzle
1pc Concentration nozzle
1pc Hook nozzle
Color box



DX9010 710W Blower



FEATURE

- 710W high slot full rate motor
- Compact and lightweight design
- Step less speed adjustment, adjustable air volume, suitable for a variety of scenarios
- High strength double-sided fan blade design, thickened machine body
- Lock-on switch

SPECIFICATIONS

Power	710W
Airflow speed	3.5 m³/min
Machine weight	1.6Kg

No load speed	8000-16000RPM
---------------	---------------

ACCESSORIES

1pc Blower tube
Color box



DH1005 2 in 1 Folding Worktable and Sawhorse



FEATURE

- Integrated clamping system securely holds the working material in place
- Folding tray for convenient storage of tools
- Clamps dogs increase clamping options further
- Universal quick clamps can be used on all work support products
- Table joiner link locks together multiple units if desired

SPECIFICATIONS

Max. clamp force	122kg-136kg
Opened table size	787x635mm
Folded table size	635x127x889mm
Max. clamp width	457mm

Max. load	136kg as table / 454kg as sawhorse
Opened table size	787x635mm
Folded table size	635x127x889mm
Weight	13.5kg

ACCESSORIES

2pc Quick clamps
4pc Dog clamps
Color box



DH1006 Miter Saw Stand



FEATURE

- Universal design works with all brands of miter saws
- Quick set up with quick-release levers
- Integrated material stops, repetitive cuts can be made quickly and accurately
- Tooling box and metal net on the worktop makes the tools organized
- Two sturdy wheels that make transporting the stand effortless
- Legs provide superior support and fold away for easy storage
- Compact design Lightweight aluminum construction allows for easy transport to and from the jobsite

SPECIFICATIONS

Max load	150kg
Product size	(1090-1675)x700x(845-955)mm
Fold size	1260x260x195mm
Material stops width	1090-1675mm

ACCESSORIES

Color box



DH1002 94cm Jawhorse



FEATURE

- Clamping range reaches 940mm
- Large clamping force exceeds 1,000kg
- All steel construction provides rigidity and strength
- Urethane pads protect the loaded object
- Tripod base for stability on uneven ground
- Quickly folds down for storage
- Quick release leg latches
- Transport wheels

SPECIFICATIONS

Clamping range	0-940mm
Max. clamping force	1,000kg
Clamp method	Foot step
Max. load	272kg

Folded size	737x356x330mm
Clamp travel - foot pedal	9.5mm per step
Construction	Solid steel
Machine weight	42.9Kg

ACCESSORIES

Color box



DH1004 Clamping Sawhorse



FEATURE

- Integrated clamping system securely holds the working material in place
- External cable hooks and Folding tray for convenient storage of tools
- Compact and lightweight design for effortless transport and storage
- 455Kg Max holding capacity per pair

SPECIFICATIONS

Max. weight capacity	455kg/pair
Product size	685mmx130mmx830mm
Fold size	485mmx130mmx830mm
Weight	7.2kg

ACCESSORIES

2pc Quick clamps
Color box





INTELLICUT
INTELLICUT™ Technology
- for extending the running time
depending on working conditions

DG210

18V Brushless 33cm Grass Trimmer

FEATURE

- Intelligent cut for extending the run time depending on working conditions
- Gear transmission for more power and torque output
- Strong brushless motor for 10 times longer life time, higher efficiency, and longer running time
- Adjustable auxiliary handle
- Dual line bump feed system
- Compact and lightweight design
- Foldable shaft for easy storage

SPECIFICATIONS

Rated voltage	18V
Cutting diameter	33cm
No-load speed	5000/min
Line diameter	2.0mm
Cutting line length	2x2m
Machine weight	3.9kg

ACCESSORIES

- 1pc Safety guard
- 1pc Auxiliary handle
- 1pc Hex key
- 1pc 4.0Ah Battery pack
- 1pc Charger(4A)



01 Gear transmission for more power and torque output



02 Foldable shaft for easy storage



03 Dual line bump feed system

DG220 18V Brushless 61cm Hedge Trimmer

FEATURE

- STRIKE CUT function to overcome tough jobs when meet jumbled condition
- Large cutting capacity can cut branches up to 1"(25mm) thick
- Strong brushless motor for 10 times longer life time, higher efficiency, and longer running time each full charge
- Dual action cutting blades for reduced vibration and smooth cutting performance
- Dual safety switch for more safety

SPECIFICATIONS

Rated voltage	18V
No-load speed	3300/min
Blade length	61cm
MAX. Cutting diameter	25mm
Machine weight	2.8kg

ACCESSORIES

- 1pc Blade sheath
- 1pc Safety guard
- 1pc 4.0Ah Battery pack
- 1pc Charger(4A)



DG250 18V Brushless Jet Fan Blower

FEATURE

- EVER BALANCE Technology for good balance whenever use 4Ah or 8Ah battery
- Strong brushless motor for 10 times longer life time, higher efficiency, and longer running time
- Variable speed design for optimal performance depending on different working conditions
- Lightweight and ergonomic one-hand operation

SPECIFICATIONS

Rated voltage	18V
Air speed	161km/h
Air volume	765m ³ /h
Blow force	10N
Machine weight	2.1kg

ACCESSORIES

- 1pc 4.0Ah Battery pack
- 1pc Charger(4A)



DG236

18V Brushless 1" Pruner Shears

FEATURE

- High-efficiency brushless motor – for higher power, extended runtime, and longer life
- Slim body and ergonomic design for easy one hand operation
- Titanium Coated SK5 high strength blade with sharp edges provides longer blade life and smooth cutting surface
- 25mm max cutting capacity with a compact design
- Blade can be interlocked with the trigger, providing smooth blade movement similar to that of a hand pruner
- Electronic technology controls blade crossing and blade opening to increase cutting efficiency and run-time
- Double Lock-off switch for security and left-right handed users
- Power Share® battery is interchangeable with other 20V MAX CAT tools

SPECIFICATIONS

Rated voltage	18V
Max blades opening	25mm
Cutting speed	0.5 second/cut
Blade	Titanium plated blade
Opening design	Two types
LED light	Yes

ACCESSORIES

- 1pc 2.0Ah Battery pack
- 1pc Charger(2A)



DG230

18V Brushless 30cm Chain Saw

FEATURE

- Heavy load indicator light provides power and runtime feedback during demanding applications
- More compact design for light weight and easy use
- Strong brushless motor for 10 times longer life time, higher efficiency, and longer running time
- Auto chain lubrication with oil level window
- Auto loading technology automatically adjusts power for optimal performance
- Quick stop chain brake and auto kick back protection for added safety
- Tool-free chain tension

SPECIFICATIONS

Rated voltage	18V
Bar length	30cm
Chain speed	7.9m/s
Oil tank capacity	6.1oz
Machine weight	4.65kg

ACCESSORIES

- 1pc Chain & bar
- 1pc Blade protection cover
- 1pc 4.0Ah Battery pack
- 1pc Charger(4A)





DG231

18V Brushless Mini Chainsaw

FEATURE

- Brushless motor provides higher power, extended run time, and longer life
- 12cm max cutting capacity
- Auto oil function
- More compact and light weight design
- Tool-free chain replacement and tension system
- Double lock-off switch for security
- Soft grip for second grip point

SPECIFICATIONS

Rated voltage	18V
Bar length	12cm
Chain speed	10m/s
Oil tank capacity	20ml
Chain gauge	0.043"(1.1mm) m/s
Chain pitch	7.6mm

ACCESSORIES

- 1pc Blade protection cover
- 1pc Bottle
- 1pc 4.0Ah Battery pack
- 1pc Charger(4A)



DG270

18V Brushless 34cm Lawn Mower

FEATURE

- Brushless motor provides higher power, extended run time, and longer life
- Intellect technology to keep constant cutting efficiency even in dense grass
- 35L Bag collection with filling indicator
- Ergonomically designed handle with soft grip
- Cutting to edge
- Vertical storage for saving space

SPECIFICATIONS

Rated voltage	18V
No load speed	3000/min
Deck width	34cm
Wheel size	150mm/150mm
Bag collection	35L
Cutting height	20-70mm
Cutting height adjustment	6 Positions, 1 Level

ACCESSORIES

- 1pc Grass collection bag
- 1pc 4.0Ah Battery pack
- 1pc Charger(4A)



DG272

2X18V Brushless 41cm Lawn Mower

FEATURE

- Intellicut technology to keep constant cutting efficiency even in dense grass
- Brushless motor provides higher power, extended run time, and longer life
- 2-in-1: bag collection and mulch function
- Grass bag filling indicator
- Ergonomically designed handle with soft grip
- Cutting to edge
- Vertical storage for saving space
- One button quick release telescopic handle for compact storage

SPECIFICATIONS

Rated voltage	2X18V
No load speed	3000/min
Deck width	41cm
Wheel size	180mm/200mm
Bag collection	50L
Cutting height	20-70mm
Cutting height adjustment	7 Positions

ACCESSORIES

- 1pc Grass collection bag
- 1pc 4.0Ah Battery pack
- 1pc Charger(4A)



DG274 2X18V Brushless 51cm Self-propelled Lawn Mower

FEATURE

- Intellicut technology to keep constant cutting efficiency even in dense grass
- Brushless motor provides higher power, extended run time, and longer life
- 3 in1 mower: bagging, mulching, side-discharge
- Ergonomically designed handle
- Cutting to edge
- Vertical storage for saving space
- One button quick release telescopic handle for compact storage

SPECIFICATIONS

Rated voltage	2X18V
No load speed	2800/min
Deck width	51cm
Wheel size	200mm/250mm
Bag collection	70L
Cutting height	40-100mm
Cutting height adjustment	7 Positions
Bag material	full fabric
Deck material	steel
Side discharger	Yes
Self-propelled	Yes

ACCESSORIES

- 1pc Grass collection bag
- 1pc Side-discharge deflector
- 2pc 8.0Ah battery
- 1pc 4A dual port charger



INTELLICUT
INTELLICUT™ Technology
- for extending the run time
depending on working conditions

Self-propelled



3-in-1: Bagging / Mulching / Side-discharge

1. Mulching




2. Bagging




3. Side-discharge



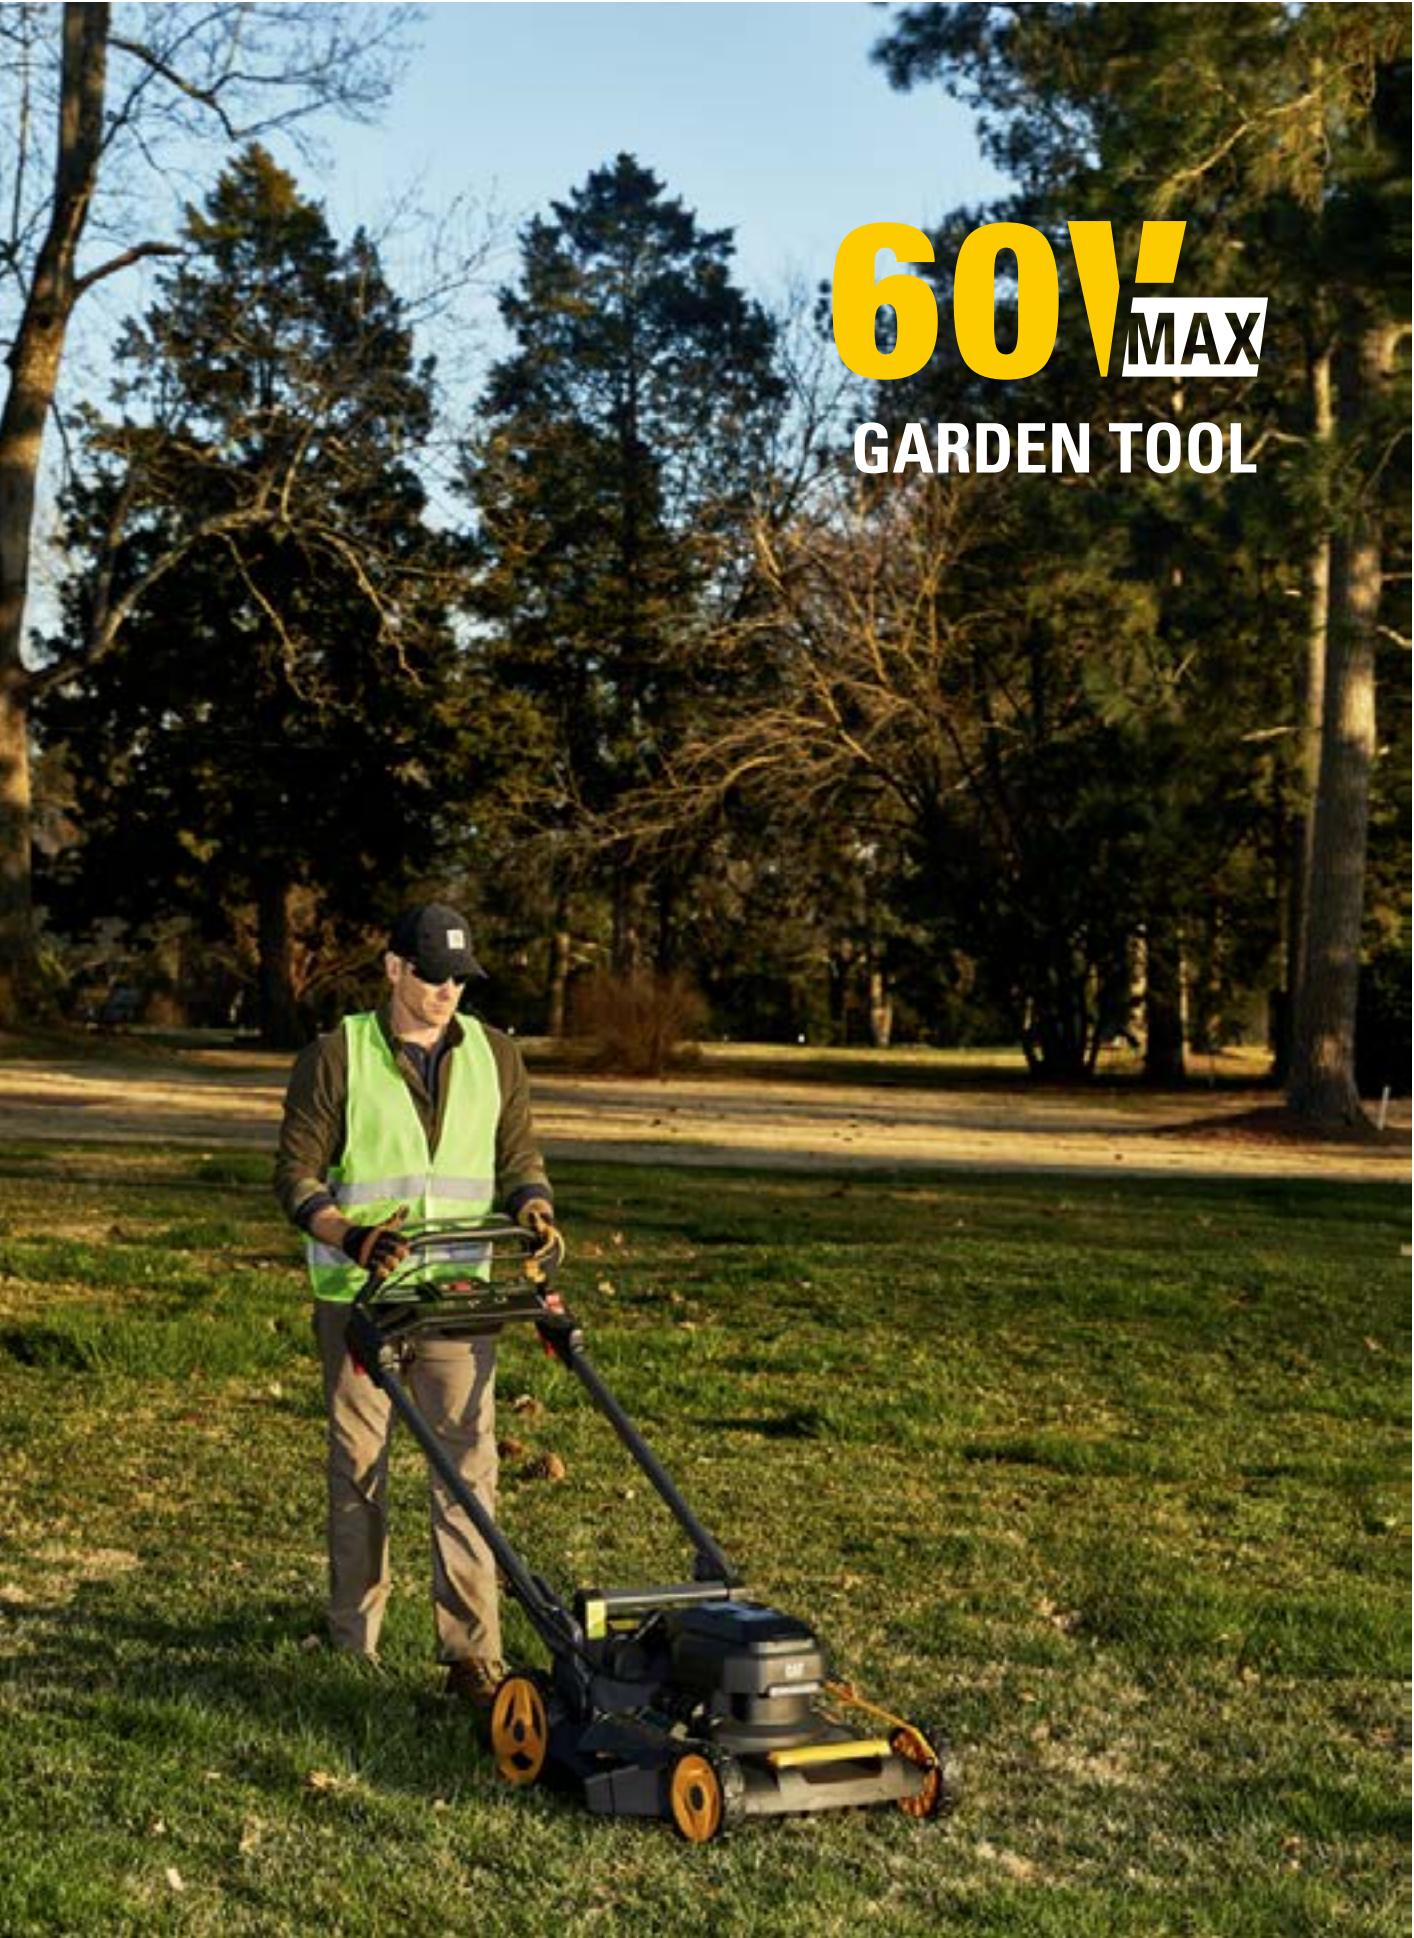



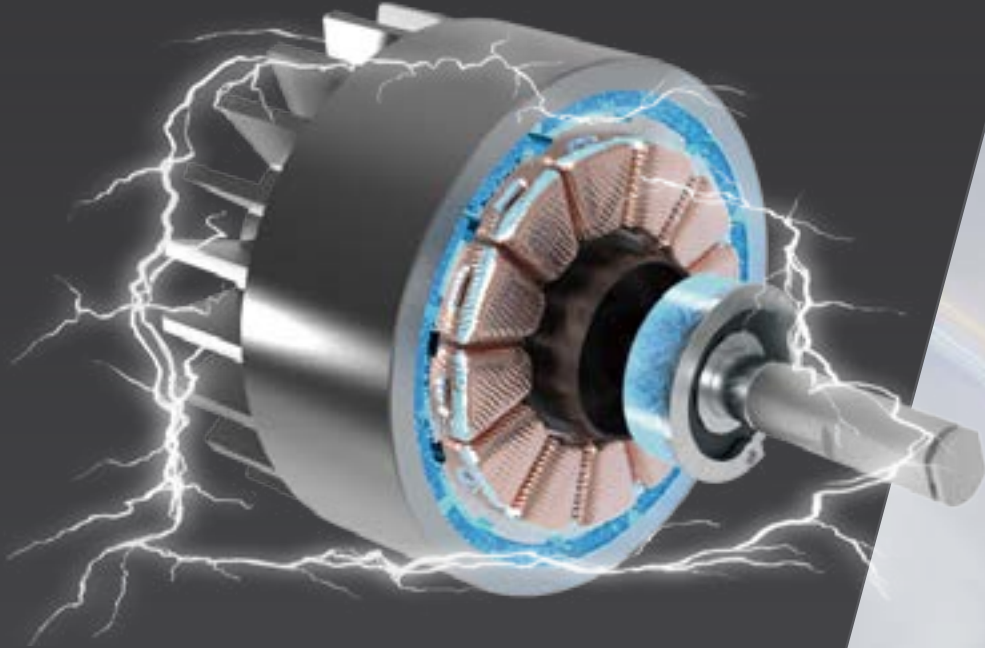

**BUILT STRONGER
RUNS LONGER**


- Full Range High-Torque Brushless Motors
- Gas-like Power With Optimal Efficiency
- Increased Runtime And Longer Life

ADVANCED BATTERY TECHNOLOGY

CELL PROTECT: INCREASED
PROTECTION FROM IMPACTS,
DROPS, AND VIBRATION.

HDPE THERMOPLASTIC MATERIAL
IS ENGINEERED TO PROVIDE HIGH
POWER AND KEEP CELLS COOL
FOR LONGER RUN TIME.

INTELLIGENCE BUILT IN:
COMMUNICATION WITH TOOL
PROVIDES PEAK BATTERY
PERFORMANCE AND WITH
CHARGER FOR FASTER CHARGING.

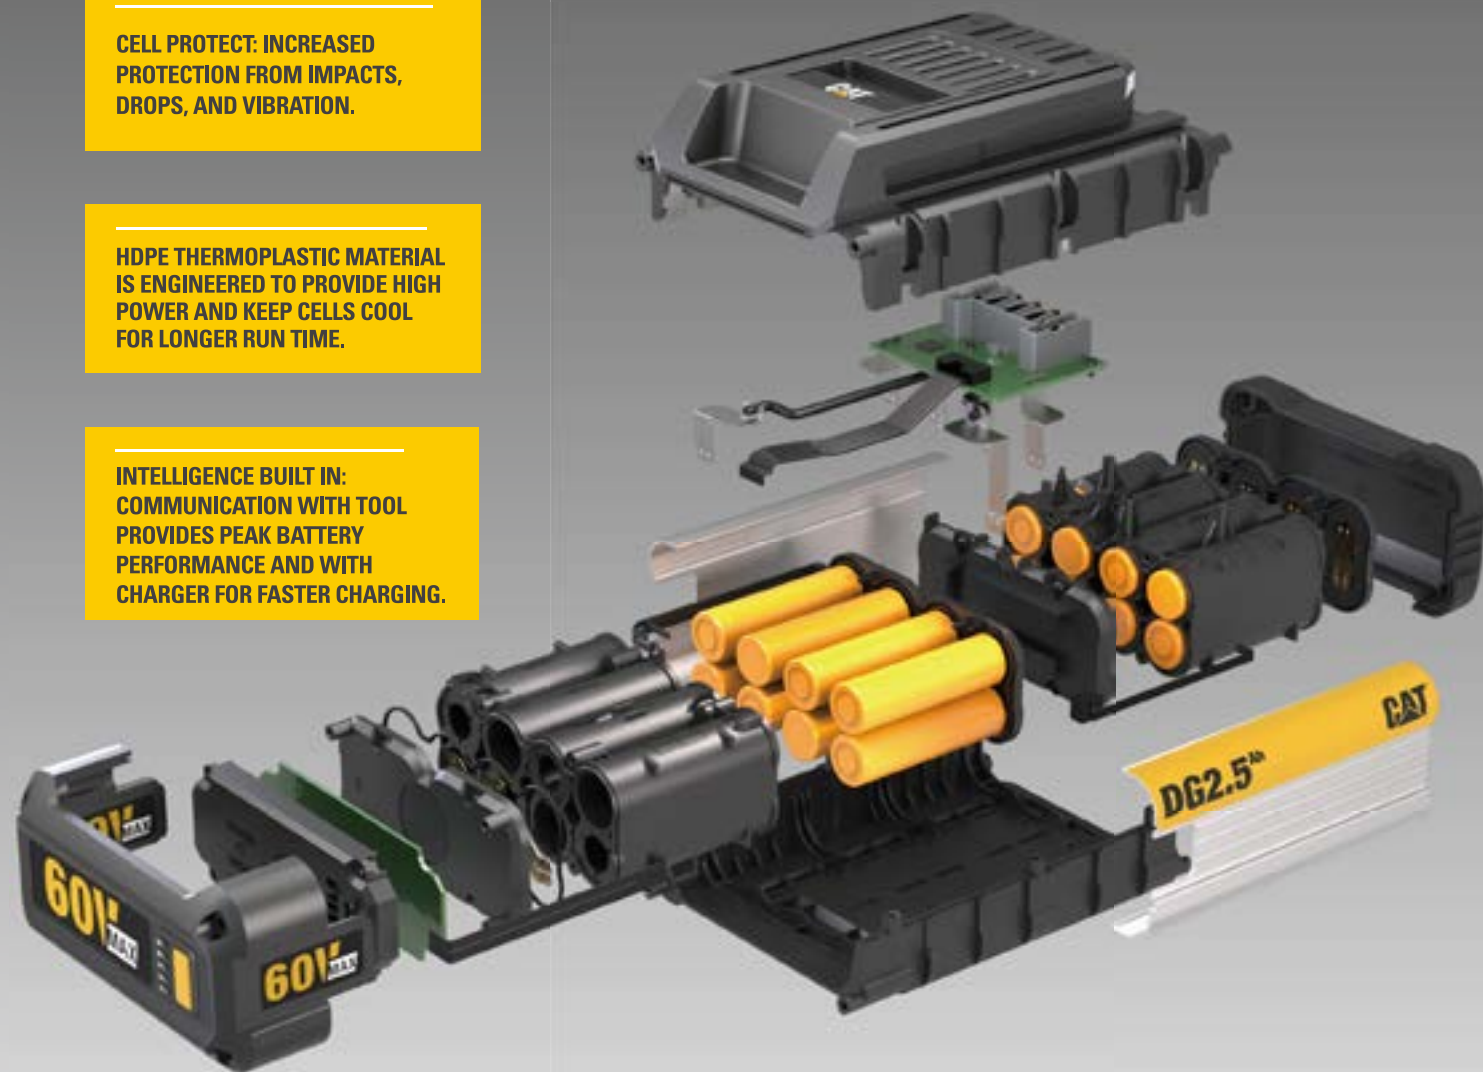

The CAT battery is a key component of an intelligent ECO system of battery powered products. SmartLink is the brain of the CAT 60V battery pack, managing charging, discharging, voltage reporting, temperature and state of health. TEMP Control fullyencapsulates every cell to draw heat away, allowing cells to stay cooler longer, increasing efficiency and run time. CELL Protection that fully encloses each cell provides increased security against vibration, impact, water entrance and thermal runaway.

60V MAX

DG6B25 60V 2.5AH BATTERY

SPECIFICATIONS

Voltage	60V
Battery capacity	2.5Ah
Charging time	30mins(Work with Charger DG6C5) 30mins(Work with Charger DG6C8)
Machine weight	1.55Kg

2.5Ah
LI-ION



DG6B5 60V 5AH BATTERY

SPECIFICATIONS

Voltage	60V
Battery capacity	5Ah
Charging time	60mins(Work with Charger DG6C5) 40mins(Work with Charger DG6C8)
Machine weight	2.8Kg

5.0Ah
LI-ION



DG6C5 5 AMP BATTERY CHARGER

SPECIFICATIONS

Output voltage	60V
Max. Output Current	5A
Input Power	350W
Charging time	2.5Ah (DG6B25) 30 mins 5.0Ah (DG6B5) 60 mins
Machine weight	1.7Kg



DG6C8 8 AMP DUAL BATTERY CHARGER

SPECIFICATIONS

Output voltage	60V
Max. Output Current	8A
Input Power	580W
Charging time	2.5Ah(DG6B25)—1/2pc 30/40mins 5.0Ah (DG6B5)—1/2pc 40/75mins
Machine weight	2.8Kg



DG610

60V Brushless 15" String Trimmer



FEATURE

- High-efficiency outer rotor brushless motor delivers 40% more power than standard brushless motors
- Quick line loading with a simple twist of a knob-dual-exit .095 in. bump feed head
- Grass shield protects operator from dirt and debris while limiting line length to 15 in
- ECO mode extends battery life and is great for trimming in delicate areas

SPECIFICATIONS

Rated voltage	60V max
Battery capacity	2.5Ah
Line diameter	.095"
Cutting head	Quick load dual line bump feed head
Cut path	15"
Charger	3A
Run time	Up to 40min.(2.5Ah Battery)
Product weight	9.9lbs(with battery) /6.6lbs.(tool only)

ACCESSORIES

- 1pc Grass shield
- 1pc Quick load head
- 1pc 60V 2.5Ah Battery pack
- 1pc 3A Charger



DG620

60V Brushless 25" Backpack Hedge Trimmer



FEATURE

- Backpack battery removes the weight of the battery from the tool allowing for easier trimming andsculpting
- High-efficiency outer rotor brushless motor delivers 40% more power than standard brushless motors
- Ergonomic rotating rear handle makes any cutting position easy and comfortable
- 2-Speed control.The low-speed setting is ideal for light trimming.The high-speed setting cuts at up to 3,200spm for trimming dense shrubs
- Laser cut 25" dual edge blade offers a clean cut on every branch
- Better than gas. High-performance without the noise, maintenance, and fumes
- Blade guard offers protection nera handle area

SPECIFICATIONS

Rated voltage	60V max
Max.cutting diameter	1.3"
Strokes per minute	3200
Blade length	25"
Tooth spacing	1.6"
Product weight	7.9lbs

ACCESSORIES

- 1pc Blade sheath
- 1pc 60V 2.5Ah Battery pack
- 1pc 3A Charger



DG630 60V Brushless 16" Chainsaw



FEATURE

- High-efficiency outer rotor brushless motor delivers 40% more power than standard brushless motors
- Tool-less chain tensioning for perfect chain tension every time
- Automatic chain oiler
- Worry free bar & chain lubrication for less wear & tear
- Reduce kickback bar nose
- Small radius bar nose for enhanced safety
- Better than gas
- High-performance without the noise, maintenance, and fumes

SPECIFICATIONS

Rated voltage	60V max
Battery capacity	2.5Ah
Chain pitch	3/8"
Chain	3/8"Lp
Chain size	16"
Chain speed	68.9ft./sec
Chain brake	Inertia
Product weight	13.1lbs

ACCESSORIES

- 1pc 16" chain & bar
- 1pc Blade sheath
- 1pc 60V 2.5Ah Battery pack
- 1pc 3A Charger



DG631 60V Brushless 18" Chainsaw



FEATURE

- High-efficiency outer rotor brushless motor delivers 40% more power than standard brushless motors
- Tool-less chain tensioning for perfect chain tension every time
- Automatic chain oiler
- Worry free bar & chain lubrication for less wear & tear
- Reduce kickback bar nose
- Small radius bar nose for enhanced safety
- Better than gas
- High-performance without the noise, maintenance, and fumes

SPECIFICATIONS

Rated voltage	60V max
Battery capacity	5Ah
Chain pitch	3/8"
Chain	3/8"Lp
Chain size	18"
Chain speed	78.7ft./sec
Chain brake	Inertia
Product weight	16.3lbs

ACCESSORIES

- 1pc 18" chain & bar
- 1pc Blade sheath
- 1pc 60V 5Ah Battery pack
- 1pc 3A Charger



DG650

60V Brushless 700 CFM Leaf Blower

2.5Ah

LI-ION

BRUSHLESS™

MOTOR

VARIABLE

AIR

CONTROL™

700

CFM

135

MPH

FEATURE

- High-efficiency outer rotor brushless motor delivers 40% more power than standard brushless motors
- Adjustable speed control allows the user to choose the power needed for clearing light or heavy yard debris and leaves
- In-line axial fan for extreme power and efficiency
- Turbo mode provides an additional boost at the push of a button for those heavy-duty blower needs

SPECIFICATIONS

Rated voltage	60V max
MAX air volume	700 cfm
MAX airspeed	135 mph
Variable air control	Operator controlled nozzle
Run time	Up to 50 min
Unit weight	8.3 lbs

ACCESSORIES

- 1pc 60V 2.5Ah Battery pack
- 1pc 3A Charger



DG651

60V Brushless 800 CFM Leaf Blower

5.0Ah

LI-ION

BRUSHLESS™

MOTOR

VARIABLE

AIR

CONTROL™

800

CFM

170

MPH

FEATURE

- High-efficiency outer rotor brushless motor delivers 40% more power than standard brushless motors
- Adjustable speed control allows the user to choose the power needed for clearing light or heavy yard debris and leaves
- In-line axial fan for extreme power and efficiency
- Turbo mode provides an additional boost at the push of a button for those heavy-duty blower needs

SPECIFICATIONS

Rated voltage	60V max
MAX air volume	800 cfm
MAX airspeed	170 mph
Variable air control	Operator controlled nozzle
Run time	Up to 110 min
Unit weight	11 lbs

ACCESSORIES

- 1pc 60V 5Ah Battery pack
- 1pc 3A Charger



DG670

60V Brushless 21" Push Lawn Mower



FEATURE

- High-efficiency outer rotor brushless motor delivers 40% more power than standard brushless motors
- Dual battery port is ideal for customers with large cutting requirements and includes an additional port for spare battery storage
- Single-lever cutting-height adjustments raise or lower the entire cutting deck from just one location
- Mulch/bag lever quickly switches from mulching to bagging, no plug required
- TorqLogic feature maintains cutting power under difficult mowing conditions like denser grass

SPECIFICATIONS

Rated voltage	60V max
Drive System	Push
Cutting modes	3-in-1 Mulch, bag,side discharge
Height adjustment	Single lever 7-position(1.5"-4")
Collection Capacity	2 Bushels
Battery Capacity	5.0Ah

ACCESSORIES

- 1pc Mower bag
- 1pc Discharge shoot
- 1pc 60V 5Ah Battery pack
- 1pc 3A Charger



DG671

60V Brushless 21" Self-propelled Lawn Mower



FEATURE

- High-efficiency outer rotor brushless motor delivers 40% more power than standard brushless motors
- Dual battery port is ideal for customers with large cutting requirements and includes an additional port for spare battery storage
- Single-lever cutting-height adjustments raise or lower the entire cutting deck from just one location
- Mulch/bag lever quickly switches from mulching to bagging, no plug required
- TorqLogic feature maintains cutting power under difficult mowing conditions like denser grass
- Self-propelled function with variable speed rear wheel drive allows you to adjust your cutting speedfor a better-quality cut

SPECIFICATIONS

Rated voltage	60V max
Self-propelled	Rear wheel drive
Cutting modes	3-in-1 Mulch, bag,side discharge
Height adjustment	Single lever 7-position(1.5"-4")
Collection Capacity	2 Bushels
Battery Capacity	5.0Ah

ACCESSORIES

- 1pc Mower bag
- 1pc Discharge shoot
- 1pc 60V 5Ah Battery pack
- 1pc 5A Charger



POWER TOOL ACCESSORIES

**SLIDE
LOCK**
STORAGE TECH



MODULAR DESIGN



IMPACT RESISTANCE
QUALITY



INJECTION CARRY CASE

CAT

GENERAL PURPOSE

24T
Ø184mm (7-1/4")
HW Ø184 X 30 X 2.2mm
Max 7000 RPM



ICONS GUIDE

 Durable Tip	 Plywood Cutting	 50CRV
 Drilling Plastic	 1.4mm Ultra Thin	 Metal Tube
 1/4" Hex Shank	 Granite	 Metal Steel
 FTB+F	 Paving Bricks	 Marble
 HSS-M2	 Quick Grinding	 Bricks
 MDF	 Laser Welding	 Rebar
 Fine Cut	 1.5X Long Life	 Hollow Block
 10mm Height	 Split Point Tips	 Paint Removal
 Tiles	 Self-Cooling	 Arbor 16/20mm
 Gypsum Board	 Universal Fit	 High Precision
 Double Row	 Fast Cutting	 Diamond
 Concrete Block	 Clean Cut	 Impact Torsion
 Quick Flute	 Wood With Nail	 Plywood
 HSS-Tin Coated	 Bi-Metal	 Wood Cut
 Metal Cutting	 Porcelain	 Down Cut
 Fast Cut	 Concrete	 Low Vibration
 Nico Carbide Teeth	 Vacuum Brazing	



Tiles



Wood



Bricks



Concrete



Hollow Block



Metal

SDS-Max Drill Bits



Part No.	Contents	Pack QTY
DA03904	SDS-Max Chisel Bits Set (25*400mm Flat Chisel, 50*400mm Chisel, 400mm Point Chisel)	3pcs Set

SDS Plus Hard Rock Drill Bits



Durable Tip



Quick Flute



1.5X Long Life



SDS PLUS

FEATURES

- Superior Tungsten Carbide Tipped**
Ensures better bit penetration with outstanding durability and consistent drilling life
- Centering Tip**
For deep and stable centering
- Wide U shape dust removal channel**
Provides fast dust removal and higher drilling speed and less wear
- Hardened Chrome Vanadium Shank**
Reduces the risk of body bend or broken
- SDS Plus Shrunk bit**
- Suitable for use with all Hammer Drills**
Can drill for most masonry applications such as natural or artificial stone, Limestone, concrete, brick and blockwork etc



Part No.	Size(mm)	Working Length(mm)	Pack QTY
DA03001	5.5 x 110mm	55mm	Pack 1
DA03002	5.5 x 160mm	80mm	Pack 1
DA03003	6 x 110mm	55mm	Pack 1
DA03004	6 x 160mm	80mm	Pack 1
DA03005	7 x 110mm	80mm	Pack 1
DA03006	7 x 210mm	130mm	Pack 1
DA03007	8 x 260mm	180mm	Pack 1
DA03008	10 x 260mm	180mm	Pack 1
DA03009	12 x 260mm	180mm	Pack 1
DA03010	12 x 450mm	370mm	Pack 1
DA03011	14 x 260mm	180mm	Pack 1
DA03012	16 x 260mm	180mm	Pack 1
DA03013	18 x 450mm	370mm	Pack 1
DA03014	20 x 450mm	370mm	Pack 1
DA03015	22 x 450mm	370mm	Pack 1
DA03016	25 x 450mm	370mm	Pack 1


SDS Plus Drill Bits



Part No.	Contents	Pack QTY
DA03901	SDS Plus Drill Bits 3 x 110mm (Ø5mm,6mm,6mm), 7 x 160mm (Ø6mm,7mm, 8mm,9mm,10mm,12mm)	10pcs Set
DA03902	12 x SDS Plus Drill Bits (Ø5 x 110, 5.5 x 110, 6 x 110, 8 x 110, 10 x 110, 6 x 160, 7 x 160, 8 x 160, 10 x 160, 8 x 210, 10 x 210 ,14 x 260mm), 2 x Point Chisels, 2 x Flat Chisels (20 x 140mm, 20 x 250mm) Scaling Chisel	17pcs Set

Part No.	Contents	Pack QTY
DA03903	SDS Plus Chisel Bits Set (20mm Chisel, 40mm Chisel, Point Chisel)	3pcs Set

Hard Surface Masonry Drill Bits



FEATURES

- Centering tip
For deep and stable centering
- Superior Tungsten Carbide tipped
Ensures better bit penetration with outstanding durability and consistent drilling life
- Wide U flute shape dust removal channel
Provides fast dust removal and higher drilling speed and less wear
- Hardened Chrome Vanadium Shank
Reduces the risk of body bend or broken
- Straight Shrank Bits
Suitable for use with all Impact Drills




Part No.	Size(mm)	Working Length (mm)	Pack QTY
DA04001	5 x 85mm	50mm	Pack 1
DA04002	5.5 x 150mm	90mm	Pack 1
DA04003	6 x 100mm	60mm	Pack 1
DA04004	6 x 150mm	90mm	Pack 1
DA04005	6.5 x 100mm	60mm	Pack 1
DA04006	6.5 x 150mm	90mm	Pack 1
DA04007	7 x 100mm	60mm	Pack 1
DA04008	7 x 150mm	100mm	Pack 1
DA04009	8 x 150mm	100mm	Pack 1
DA04010	10 x 150mm	100mm	Pack 1
DA04011	12 x 150mm	100mm	Pack 1
Part No.	Size(mm)		Pack QTY
DA04901	Ø3, 4, 5, 6, 7, 8, 9, 10mm		8pcs Set

Titanium Coated HSS Drill Bits



FEATURES


- 135° Split Point Tips*
Provide active cutting and accurate centering without wandering
- Titanium-Coated HSS
For improved accuracy and longer working life
- Fully-Ground HSS
Ensures high quality drill body with fast waste removal and wear resistance for long life
- Hardened HSS
Process for superb strength, easier drilling metal wood and plastic

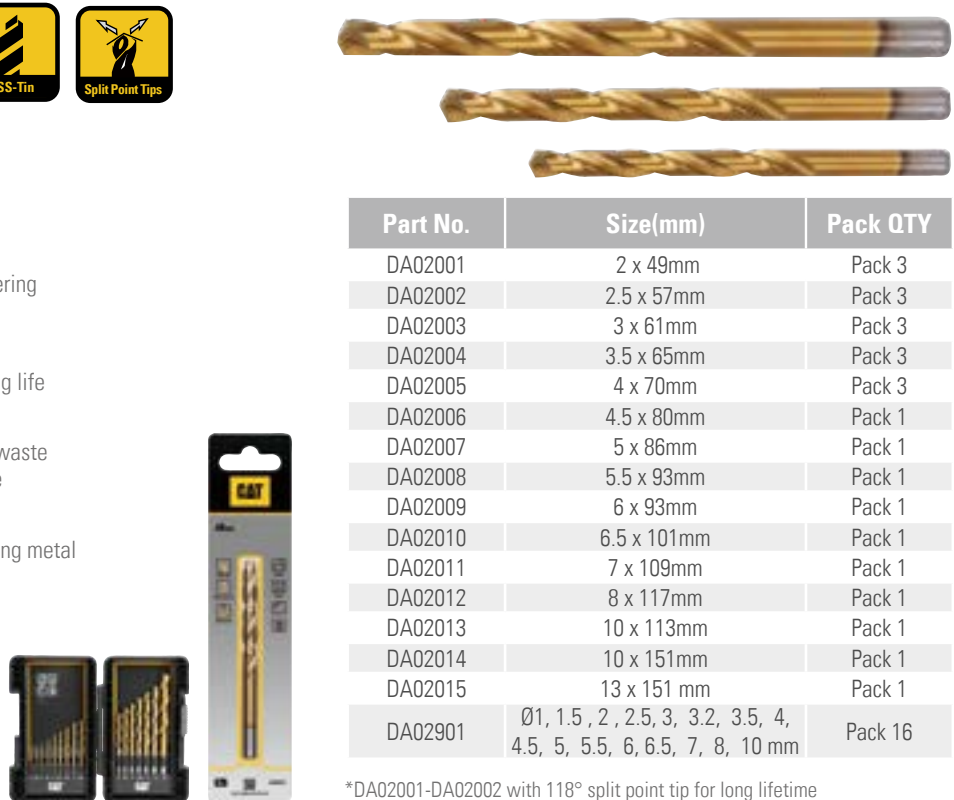

Part No.	Size(mm)	Pack QTY
DA02001	2 x 49mm	Pack 3
DA02002	2.5 x 57mm	Pack 3
DA02003	3 x 61mm	Pack 3
DA02004	3.5 x 65mm	Pack 3
DA02005	4 x 70mm	Pack 3
DA02006	4.5 x 80mm	Pack 1
DA02007	5 x 86mm	Pack 1
DA02008	5.5 x 93mm	Pack 1
DA02009	6 x 93mm	Pack 1
DA02010	6.5 x 101mm	Pack 1
DA02011	7 x 109mm	Pack 1
DA02012	8 x 117mm	Pack 1
DA02013	10 x 113mm	Pack 1
DA02014	10 x 151mm	Pack 1
DA02015	13 x 151 mm	Pack 1
DA02901	Ø1, 1.5, 2, 2.5, 3, 3.2, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 8, 10 mm	Pack 16


*DA02001-DA02002 with 118° split point tip for long lifetime

Vacuum Brazed Diamond Tile Drill Bits



FEATURES

- Industrial Diamond brazed tipped
For a professional quality finish clean, precise holes, without chipping tiles
- Wax filled centre coolant system
That absorbs the heat, melts and begins lubrication process, improves tool life and speed of drilling
- Tough 45# steel Body
Does not bend distort easily
- No need water, Self-Cooling, Self-Sharpening, Fast Drilling Speed
- 1/4" Hex Shrank
Can be used with Drill Driver & Impact Drivers, Optimum speed 2 000-3 000rpm

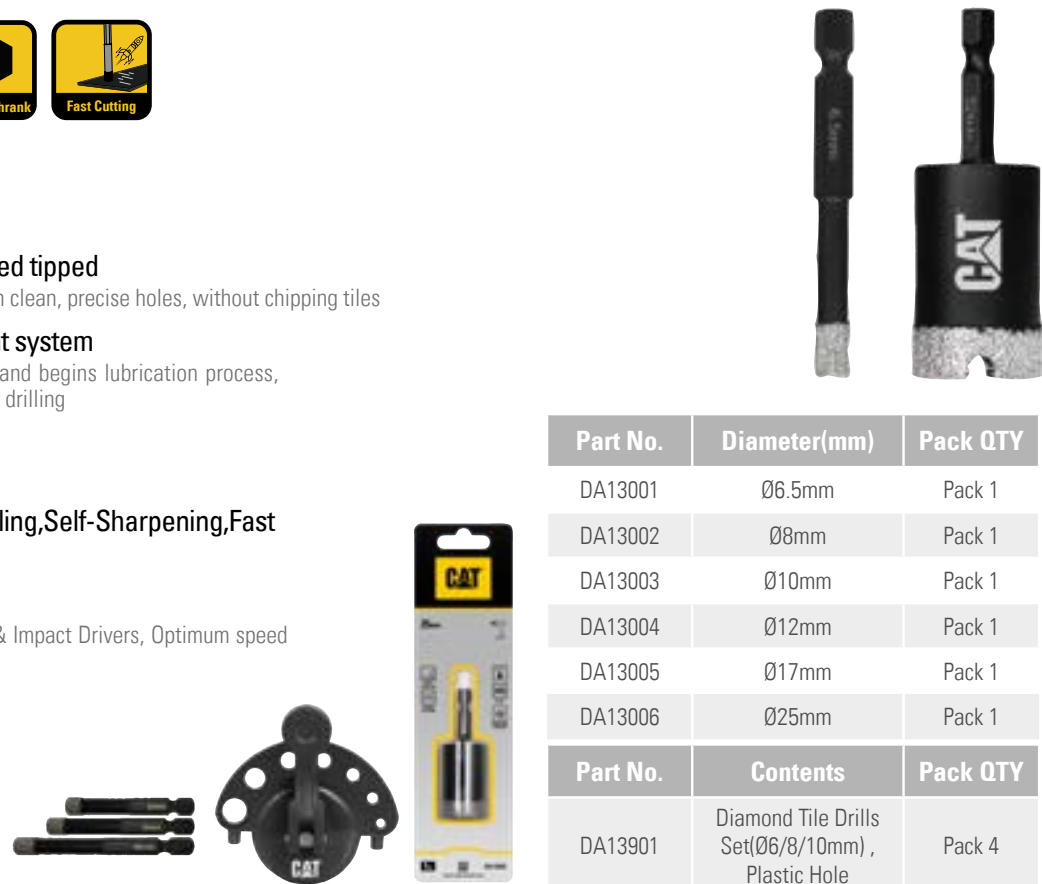

Part No.	Diameter(mm)	Pack QTY
DA13001	Ø6.5mm	Pack 1
DA13002	Ø8mm	Pack 1
DA13003	Ø10mm	Pack 1
DA13004	Ø12mm	Pack 1
DA13005	Ø17mm	Pack 1
DA13006	Ø25mm	Pack 1
Part No.	Contents	Pack QTY
DA13901	Diamond Tile Drills Set(Ø6/8/10mm), Plastic Hole	Pack 4

Wood Flat Drill Bits Set



FEATURES

- Suitable for use drill & Impact drivers
Can for rapid drilling holes in natural hard and soft wood, chipboard and other light building materials
- 1/4" Hex Shank
- Harden High-Carbon steel body
- Precision-Ground 3-Point Tip and angled cutting edges
For faster, more cleaner and accurate dimensional stability drilling

Part No.	Contents	Pack QTY
DA05901	8 x 152mm Flat Wood Bits (Ø12, 16, 18, 20, 22, 25, 28, 32mm)	Pack 8





Diamond Tip Torsion Screwdriver Bit



FEATURES

- 1/4" Hex Shrank, Premium performance impact screwdriver bits
- Cold-forged with Notching grip Tipped
Provides enhance friction to reduce cam-out risk from screw head
- Impact Torsion
Design for the ability to twist and flex under stress
- Titanium-coated prevents bits rust and great appearance
- Magnetic bit for easy to use

Part No.	Spec	length(mm)	Pack QTY
DA01001	PZ2	25mm	Pack 2
DA01002	PZ2	25mm	Pack 2
DA01003	PZ3	25mm	Pack 2
DA01004	PZ2	50mm	Pack 2
DA01005	PZ2	50mm	Pack 2
DA01006	PZ3	50mm	Pack 2



32pcs 1/4" Hex Screwdriver Bits Kit

FEATURES

- 1/4" Hex Shrank, S2 Modified Steel
- Heat-Treated for durability & toughness
- Color coded to easy identification
- Supplied in SlideLock robust plastic Injection Case

Part No.	Contents	Pack QTY
DA01901	Magnetic Bit Holder, 30 x 25mm Screwdriver Bits (2 x PZ#1, 6 x PZ#2, 2 x PZ#3, 2xPH1, 6 x PH2, 2 x PH3, SL3, SL4, SL5, SL6, T15, T20, T25, T27, T30, T40), 1/4" Hex Bit	32pcs Set



45pcs Mixed Screwdriver Bits Kit

FEATURES

- ¼" Hex Shrank,S2 Modified Steel
- Heat-Treated for durability & toughness
- Color coded to easy identification
- Manganese phosphate coated prevents Bits rust
- Supplied in SlideLock robust plastic Injection Case



Part No.	Contents	Pack QTY
DA01902	32 x 25mm Bits(PH1, 3 x PH2, PH3, PZ1, 3 x PZ2, PZ3, Hex3, Hex4, Hex5 , Hex6, SL3, SL4, SL5, SL6, 8 x TX bits TX10, TX15, TX20, TX20, TX25, TX27, TX30, TX40,TH10, TH15, TH20, TH25, TH30, TH40), 6 x 50mm Bits(PH2, PZ2, SL5.5,TX15, TX20, TX25), 2 x 89mm Bits(PH2,PZ2), 2 x 45mm Magnetic Nutdrivers (7,8 ,10mm), 60mm magnetic bit holder, 65mm Socket Adapter - 3/8" Drive	45pcs Set

Quick-Release Magnetic Bit Holder



FEATURES

- ¼" Hex shrink
Use with ¼" hex insert bits suitable for use with impact drivers, drills
- Quick-release Retracting
For quick and easy bit change
- Hardened high quality steel
For maximum durability and flexibility
- Strong magnetic tip
For secure grip
- Solid construction
Withstands abuse in impact applications



Part No.	Description	Pack QTY
DA01007	Impact Quick-Release Magnetic Bit Holder 65mm	Pack 1

3/8" Drive Impact Socket Kit- 3pcs

FEATURES

- With 3/8" square drive
For use with cordless and impact drivers
- High strength chrome molybdenum alloy steel
Offering a combination of endurance and impact resistance
- Heat treated for harden
- 6-Point Head



Part No.	Contents	Pack QTY
DA01008	3/8" Drive(8mm, 10mm, 13mm)	3pcs Set

201pcs Combination Drill Bit Set



FEATURES

- Suitable for use most drill drivers,
Can work for drilling metal, wood and plastic
- Includes
 - 21 Metal twist Drill bits: (1.5/2/2.5/3/3.5/4/4.5/5/5.5/6/8mm)
 - 6 Brad Point Drill Bits: (3/4/5/6/8/10mm)
 - 6 Masonry Drill Bits: (3/4/5/6/8/10mm)
 - 4 Spade Bits: (12/16/18/20mm)
 - 15 Wall Anchors
 - 13 Wood Screw
 - 70 25mm Insert Bits: PH, SL, SQ, TORX, HEX
 - 40 50mm Power Bits: PH, SL, SQ, TORX, HEX
 - 2 Drill Stoppers 6/8mm
 - 10 Nutdrivers: (5/5.5/6/7/8/9/10/11/12/13mm)
 - 1 Screw Finder
 - 10 Allen Keys: (1.5/2/2.5/3/4/5/5.5/6/8/10mm)
 - 1 Magnetic Bit Holder
 - 1 Countersink Bit
 - 1 Quick Connect Holder



Part No.	Description	Pack QTY
DA01903	201 pcs Mixed Bit Set	201pcs Set

SAW BLADES

IDEAL FOR CORDLESS

6X LONGER LASTING
ULTRA THIN KERF
DA08201

CAT
MULTI PURPOSE
24T
Ø184mm (7-1/4")
HW Ø184 X 30 X 2.2mm
Max 7000 RPM

GENERAL PURPOSE

CAT
24T
Ø184mm (7-1/4")
HW Ø184 X 30 X 2.2mm
Max 7000 RPM

www.catdiamondtools.com
Made in China

BIM
METAL
WOOD
METAL

50CrV
HSS-M2

HARDWOOD
PARTICLE BOARD
PLYWOOD
LAMINATE
MDF
ALUMINIUM
STEEL (up to 6mm)
PLASTIC

TCT Circular Saw Blade-Multipurpose



FEATURES

- Construction grade Nico Teeth Carbide tip
Brings up to 6times more cuts than regular blades
- Anti-Friction Coating
Reduce cutting friction and prevent blade jamming,and rust protection
- Optimized tooth geometry
Ensure multipurpose cut,last longer and less kick-back
- Specially designed Anti-vibration slots
Reduction of vibration enable smooth running,less noise
- Expansion slots
Reduced expansion/ Dampen noise/ Less heat
- Stable 75CR1 Steel Blade Base
For less vibration and stable cutting
- Standard 30mm bore with 16/20mm Reduction Rings



6X LONGER LASTING



Part No.	Type	Description	Pack QTY
DA08201	Multipurpose	Multipurpose TCT Blade For Wood, Metal, Plastic, Copper Ø184mm (7-1/4")X 30 X 1.6mm,Max 7000 RPM, Teeth 24	Pack 1
DA08202	Multipurpose	Multipurpose TCT Blade For Wood, Metal, Plastic, Copper Ø184mm (7-1/4")X 30 X 1.6mm,Max 7000 RPM, Teeth 40	Pack 1

TCT Circular Saw Blade-Thin Kerf



FEATURES

- General purpose blade for rip and cross cutting
Hard wood, soft wood, particle board , Laminate , Plywood etc
- Harden 65Mn Steel Blade Base
For less vibration and stable cutting
- High quality Carbide teeth
Ensure optimal lifetime and smooth cutting characteristics
- Auto brazing and grinding teeths
for consistent durability
- Expansion slots in blade
Help reduce vibration and noise
- Standard 30mm bore with 16/20mm Reduction Rings



Part No.	Type	Description	Pack QTY
DA08001	General Purpose	General Purpose TCT Blade, For Rip and Cross Cut, Ø184mm (7-1/4")X 30 X 2.2mm,Max 7000 RPM, Teeth 24	Pack 1
DA08002	General Purpose	General Purpose TCT Blade, For Rip and Cross Cut, Ø184mm (7-1/4")X 30 X 2.2mm,Max 7000 RPM, Teeth 40	Pack 1



Jig Saw Blades



FEATURES

- Selected popular type blades
Will cater main applications, regardless of required precision, stability and speed
- Ground teeth
Provides efficiency and accurate wood cutting performance than milled
- Heat treated steel for stable cutting
- T-Shank Fitting



T-SHRANK



Part No.	Application	Cut Type	Type	Material	Overall Length (mm)	Working Length (mm)	Depth of Cut(mm)	Tooth Distance (mm)	Tooth Pitch (mm)	PACK QTY
DA06001	Wood	Fast Straight	T144D	50CRV	100mm	75mm	5-50	4mm	6tpi	Pack 5
DA06002	Wood	Accurate Straight	T144DP	50CRV	100mm	75mm	5-50	4mm	6tpi	Pack 5
DA06003	Wood	Clean Cut	T101B	50CRV	100mm	75mm	3-30	2.5mm	10tpi	Pack 5
DA06004	Wood	Reverse Clean Cut	T101BR	50CRV	100mm	75mm	3-30	2.5mm	10tpi	Pack 5
DA06005	Metal	Fine Cut	T118A	HSS-M2	75mm	50mm	1-3	1.2mm	21tpi	Pack 5
DA06006	Metal	Coarse Cut	T118B	HSS-M2	75mm	50mm	2.5-6	2mm	12tpi	Pack 5
Part No.	Description		Contents							Pack QTY
DA06901	Wood & Metal Basic Set		2 x T119B0, 2 x T119B, 2 x T111C, 1 x T218A, 1 x T118G, 1 x T118A, 1 x T118B							Pack 10
DA06902	Professional Wood Set		1 x T101A0, 1 x T101B, 1 x T101BR, 1 x T101A0F, 1 x T101BF, 1 x T101BRF, 1 x T244D, 1 x T144D, 1 x T144DF, 1 x T144DP							Pack 10
DA06903	Wood & Metal Robust Set		1 x T244D, 1 x T144D, 1 x T101A0, 1 x T101B, 1 x T101A0F, 1 x T101BF, 1 x T118E0F, 1 x T118AF, 1 x T118BF, 1 x T123X							Pack 10


Reciprocating Saw Blades



FEATURES

- Selected popular type blades
Accuracy, stability and speed are excellent
- Universal shank
Fits all major brands
- Construction grade blades
For flexibility and durability with wider bodies for greater stability

Part No.	Application	Cut Type	Type	L(mm)	Tpi	Pack QTY
DA07001	Wood	Clean Cut	S644D	152	6	Pack 2
DA07002	Wood	Fast Clean cut	S1531L	240	5	Pack 2
DA07003	Wood&Metal	Fast Cut	S922HF	150	10	Pack 2
DA07004	Metal	Fine Cut	S922EF	150	18	Pack 2
DA07005	Metal	Fast Cut	S1122HF	228	10	Pack 2

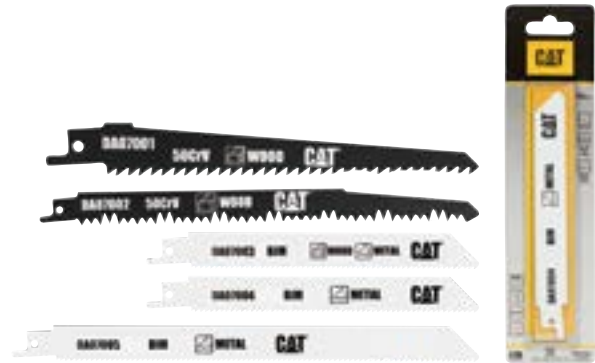

Part No.	Description	Content Details	Pack QTY
DA07901	8pcs Rep Saw Blade Set (Wood/Plastic/Metal)	2 x S1531L (L x W x Th: 240 x 19 x 1.3mm, 5tpi) 2 x S644D (L x W x Th: 150 x 19 x 1.25mm, 6tpi) 2 x S922HF (L x W x Th: 150 x 19 x 1mm, 10tpi) 2 x S922EF (L x W x Th: 150 x 19 x 1mm, 18tpi)	PACK 8

DIAMOND ACCESSORIES



THE SYMBOL OF SAFETY

ALLIANCE FOR SAFETY AND QUALITY - THE ORGANIZATION FOR THE SAFETY OF ABRASIVES

oSa stands for **Organisation for the Safety of Abrasives**. Leading producers of high-grade abrasive products have come together in this international organization to document the high safety standards of their branded and quality products. The sole purpose is to ensure that the quality of their products remains consistently high in the interests of abrasive product users. oSa members are committed to sustaining quality assurance and ensuring the adherence to safety standards.

WHAT DOES OSA DO?

As there are no binding safety requirements across the world for abrasive products, users are naturally worried and buying safe abrasives for the many fields of use is made that much more difficult.

To get that urgently needed transparency on the international markets, 17 reputable European companies in the abrasives industry set up the oSa in March 2000. It now has 50 members.

- Whose products meet or surpass the CEN standards of safety requirements for abrasive products
- Which through stipulated testing procedures and conditions ensure that these standards are also kept
- That these standards are also kept, and which accept the checks laid down by oSa

Diamond Cutting Disc– Thin Turbo



FEATURES

- Industrial Diamond with 10mm height segment
Delivers higher friction for 2x fast and longer life
- Latest Bond Technology
Enhances performance,durability and safety cutting
- Ultra Thin Turbo
Provides faster and more precise cutting compared to standard turbo blades
- Turbo grooves
provide a cooling effect when rotating, generating a fast yet smooth cut
- Fully harden and heat treated
Fully harden and heat treated steel core allows true cutting
- Wide Span of application and fast cut
For fast &clean cut for Ceramic / Tiles / Porcelain / Granites and decorative materials
- Standard 22.2mm bore with 20mm Reduction Rings



Part No.	Type	Description	Pack QTY
DA09031	Turbo Thin	115mm, Bore 22.23mm, Thin 1.4mm, Height 10mm	Pack 1
DA09032	Turbo Thin	125mm, Bore 22.23mm, Thin 1.4mm, Height 10mm	Pack 1

Diamond Cutting Blade – Turbo



FEATURES

- Industrial Diamond with 10mm height segment
Delivers higher friction for 2x fast and longer life
- Latest Bond Technology
Enhances performance,durability and safety cutting
- Turbo grooves
provide a cooling effect when rotating, generating a fast yet smooth cut
- Fully harden and heat treated
Fully harden and heat treated steel core allows true cutting
- Wide Span of application and fast cut
For Hard and General purpose building materials



Part No.	Type	Description	Pack QTY
DA09011	Turbo	115mm,22.23mm Bore, 10mm Height, Thick 2.2mm	Pack 1
DA09012	Turbo	125mm,22.23mm Bore, 10mm Height, Thick 2.4mm	Pack 1
DA09013	Turbo	230mm,,22.23mm Bore, 10mm Height, Thick 2.6mm	Pack 1
DA09014	Turbo	300mm,20mm Bore, 10mm Height, Thick 3.0mm	Pack 1
DA09015	Turbo	350mm,Bore 25.4/20mm, Height 10mm,Thick 3.2mm	Pack 1

Diamond Cutting Blade – Segmented



FEATURES

- Industrial Diamond with 10mm height segment
Delivers higher friction for 2x fast and longer life
- Latest Bond Technology
Enhances performance,durability and safety cutting
- Fully harden and heat treated
Fully harden and heat treated steel core allows true cutting
- Wide Span of application and fast cut
For General Masonry & Stone, Concrete etc



Part No.	Type	Description	Pack QTY
DA09001	Segmented	115mm,22.23mm Bore, 10mm Height, Thick 2mm	Pack 1
DA09002	Segmented	125mm,22.23mm Bore, , 10mm Height, Thick 2mm	Pack 1
DA09003	Segmented	230mm, Bore 22.23mm, 10mm Height, Thick 2.4mm	Pack 1
DA09004	Segmented	300mm,Bore 20mm, Height 10mm,Thick 3.0mm	Pack 1
DA09005	Segmented	350mm,Bore 25.4/20mm, Height 10mm,Thick 3.2mm	Pack 1

Diamond Cutting Blade – Continuous Rim



FEATURES

- Industrial Diamond with 7mm height segment
Delivers higher friction for 2x fast and longer life
- Latest Bond Technology
Enhances performance,durability and safety cutting
- Thin Kref
Provides faster and more precise cutting
- Fully harden and heat treated
Fully harden and heat treated steel core allows true cutting
- Wide Span of application and fast cut
For Fast/Clean Cut for Ceramic/Tiles/ Porcelain/ Granites and decorative materials



Part No.	Type	Description	Pack QTY
DA09021	Continuous Rim	110mm, Bore 22.23mm, Thin 1.6mm, Height 7mm	Pack 1
DA09022	Continuous Rim	115mm, Bore 22.23mm, Thin 1.6mm, Height 7mm	Pack 1
DA09023	Continuous Rim	125mm, Bore 22.23mm, Thin 1.6mm, Height 7mm	Pack 1
DA09024	Continuous Rim	180mm, Bore 22.23mm, Thin2.0mm, Height 7mm	Pack 1
DA09025	Continuous Rim	200mm, Bore 25.4/22.23mm, Thin 2.0mm, Height 7mm	Pack 1


VACUUM BRAZED DIAMOND BONDED TECHNOLOGY

MULTI-PURPOSE

SUITABLE FOR WOOD, STEEL, STONE, CERAMICS, AND OTHER BUILDING MATERIALS



Vacuum Brazed Diamond Blade- Multipurpose



FEATURES

- Industrial Diamond
Selected grit quality and size ensure a multi-application, fast cut and a long lifetime
- Vacuum brazing process
High bonding strength between steel and diamond grit, ensure a durable and safe application
- Blade geometry
Thin body design and expansion slot ensure an unique cutting speed and avoid blade deformation
- One blade allows Multi-purpose applications
Suitable for cutting steel, metal, concrete, bricks, asphalt, tiles, wood, wood with nails, plastic, drywall and other building materials
- Standard 22.2mm bore with 20mm Reduction Ring



CUTS ALL

Part No.	Description	Pack QTY
DA09052	Vacuum Brazed Diamond Blade- Multi Purpose Ø115mm x 22.23mm	Pack 1

Vacuum Brazed Diamond Blade - Metal Cut



FEATURES


- Self sharpening industrial diamond
- Vacuum brazing process
High bonding strength between steel and diamond grit, ensure a durable and safe application
- Long life with 1000+Cuts
30x longer over resin bonded abrasive wheels Life
- One blade allows most metal applications
Suitable for cutting Steel, INOX, Rebar, Cast Iron, Aluminium, Copper, Plastic, Rubber, Fiber Glass etc.
- Extremely safe no shattering benefits from advanced metal core
- Less odour & dust
Than conventional resin bonded abrasive wheels
- Less sparking in metal cutting
- Standard 22.2mm bore with 20mm Reduction Rings



1000+ CUTS 30x LONGER

Part No.	Description	Pack QTY
DA09051	Vacuum Brazed Diamond Blade- Metal Cut Ø115mm x 22.23mm	Pack 1

Diamond Concrete Grinding Cup



FEATURES

- For rapid removal
Graffiti and cleaning concrete, masonry, and natural stones.
- High quality industrial diamond
Ensures long lifetime
- Double Row
Results large work area, and longer life time
- Less Vibration and dynamic balance
For best working experience
- Fit for 115mm/125mm Angle Grinders



Part No.	Description	Bonded Process	Pack QTY
DA09041	Double Row 125mm x 22.2mm	Hot Press	Pack 1

8PCS Professional Diamond Core Drill Kit



FEATURES


- High quality industrial diamond
For fast drilling & long life
- Laser welding
Enables continuously and intensively drilling jobs
- Wave shape rooftop segments
For easy start and quick cutting
- Slotted Spiral Barrel enhances dust removal
- Supplied with Cat SlideLock System injection case
- Idea for Dry Use
For fast, clean drilling into masonry, bricks and blocks etc



Part No.	Contents	Pack QTY
DA09901	3 X Diamond Core Drills (Ø38mm, 52mm, 117mm), 200mm Extension Bar, 115mm SDS Adaptor, 90mm 3-Jaw Adaptor, (Ø8 x 205mm) Pilot Drill, 75mm Drift Key	8pcs Set



Sanding Sheets & Belts

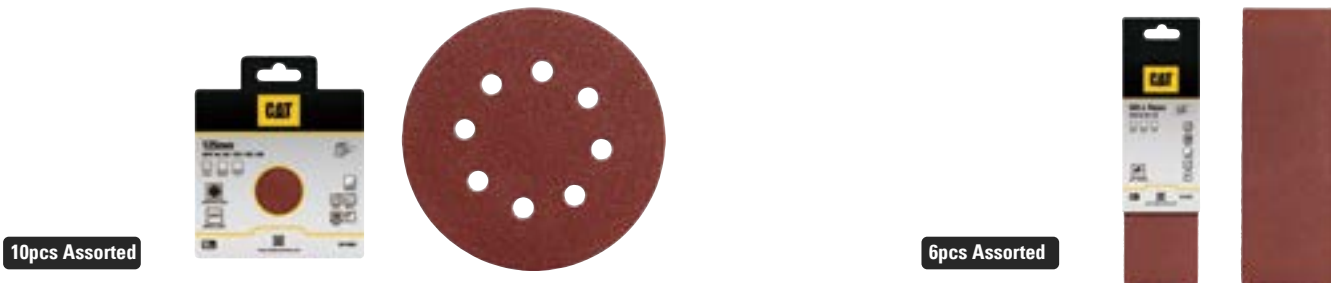

Part No.	Description	Grit	Pack QTY
DA14003	Rotary / Obrita Sander Discs, 125mm, Hook & Loop Fixing	2 x (Grit 60, 80, 120, 180, 240)	Pack 10

Part No.	Description	Grit	Pack QTY
DA14001	Cloth Sanding Belts, 533x75mm	2 x (Grit 60, 80, 120)	Pack 6

Sanding Sheets & Belts



FEATURES

- Open coat aluminum oxide abrasive
- Perfectly work with Cat Sanding tools for the highest performance
- Easy to use under Hook & Loop Fixing system
- Widely use
For use on Wood, Paint, Varnish, Plaster, Filler & Metal etc.



10pcs Assorted



Part No.	Description	Grit	Pack QTY
DA14002	Corner Sanding Sheets, Hook & Loop Fixing, 95x145mm	2 x (Grit 60,80,120,180,240)	Pack 10



10pcs Assorted



Part No.	Description	Grit	Pack QTY
DA14004	1/4 Sanding Sheets, Hook & Loop Fixing, 102x114mm	2 x (Grit 60,80,120,180,240)	Pack 10



10pcs Assorted



Part No.	Description	Grit	Pack QTY
DA14005	1/3 Sanding Sheets, Hook & Loop Fixing, 93x230mm	2 x (Grit 60,80,120,180,240)	Pack 10



10pcs Assorted



Part No.	Description	Grit	Pack QTY
DA14006	1/2 Sanding Sheets, Hook & Loop Fixing, 115x230mm	2 x (Grit 60,80,120,180,240)	Pack 10



Abrasive Flat Metal & INOX Cutting Disc



FEATURES

- High quality abrasive discs
Bring safety, productivity in metalworking
- Two sides full sheets of fiberglass
For durability and safety
- Standard hub
Allows for fast, tool-free wheel changes
- Proprietary aluminum oxide grain combination
Allows aggressive cutting & more cuts
- Cover a wide range of metal cutting applications

Part No.	Material	Work Type	Type	Description	Pack QTY
DA10128	Metal &INOX	Cutting	Flat	Ø105 x 1.2 x 16 mm (4" x 3/64" x 5/8")	Pack 10
DA10115	Metal &INOX	Cutting	Flat	Ø115 x 1.0 x 22.23 mm (4-1/2" x 0.04" x 7/8")	Pack 10
DA10116	Metal &INOX	Cutting	Flat	Ø115 x 1.6 x 22.23 mm (4-1/2" x 1/16" x 7/8")	Pack 10
DA10117	Metal &INOX	Cutting	Flat	Ø115 x 2.5 x 22.23 mm (4-1/2" x 1/10" x 7/8")	Pack 10
DA10118	Metal	Cutting	Flat	Ø115 x 3.0 x 22.23 mm (4-1/2" x 1/8" x 7/8")	Pack 10



FLAT

Part No.	Material	Work Type	Type	Description	Pack QTY
DA10119	Metal &INOX	Cutting	Flat	Ø125 x 1.0 x 22.23 mm (5" x 0.04" x 7/8")	Pack 10
DA10120	Metal &INOX	Cutting	Flat	Ø125 x 1.6 x 22.23 mm (5" x 1/16" x 7/8")	Pack 10
DA10121	Metal &INOX	Cutting	Flat	Ø125 x 2.5 x 22.23 mm (5" x 1/10" x 7/8")	Pack 10
DA10122	Metal	Cutting	Flat	Ø125 x 3.0 x 22.23 mm (5" x 1/8" x 7/8")	Pack 10
DA10123	Metal &INOX	Cutting	Flat	Ø180 x 1.6 x 22.23 mm (7" x 1/16" x 7/8")	Pack 5
DA10124	Metal	Cutting	Flat	Ø230 x 2.0 x 22.23 mm (9" x 1/12" x 7/8")	Pack 5
DA10126	Metal	Cutting	Flat	Ø355 x 3.0 x 25.4 mm (14" x 1/8" x 1")	Pack 5

Abrasive Depressed Thick Metal Cutting Disc



FEATURES

- High quality abrasive discs
bring safety, productivity in metalworking
- Two sides full sheets of fiberglass
For durability and safety
- Standard hub allows
For fast, tool-free wheel changes
- Proprietary aluminum oxide grain combination
Allows aggressive cutting & more cuts
- Cover a wide range of metal cutting applications
- Thick type wheel design



DEPRESSED

Part No.	Material	Work Type	Type	Description	Pack QTY
DA10012	Metal	Cutting	Depressed	Ø115 x 3.0 x 22.23 mm (4-1/2" x 1/8" x 7/8")	Pack 10
DA10013	Metal	Cutting	Depressed	Ø125 x 3.0 x 22.23 mm (5" x 1/8" x 7/8")	Pack 10
DA10014	Metal	Cutting	Depressed	Ø180 x 3.0 x 22.23 mm (7" x 1/8" x 7/8")	Pack 10
DA10015	Metal	Cutting	Depressed	Ø230 x 3.0 x 22.23 mm (9" x 1/8" x 7/8")	Pack 10

Abrasive Flat Thin Cutting Disc



FEATURES

- High quality abrasive discs
bring safety, productivity in metalworking
- Two sides full sheets of fiberglass
For durability and safety
- Standard hub allows
For fast, tool-free wheel changes
- Proprietary aluminum oxide grain combination
Allows aggressive cutting & more cuts
- Thin wheel design for fast cutting
- Cover a wide range of metal cutting applications



DA10901-DA10902



DA10904-DA10905



FLAT

Part No.	Material	Work Type	Type	Description	Pack QTY
DA10901	Metal &INOX	Cutting	Flat	Ø115 x 1.0 x 22.23 mm (4-1/2" x 0.04" x 7/8")	Pack 10
DA10902	Metal &INOX	Cutting	Flat	Ø125 x 1.0 x 22.23 mm (5" x 0.04" x 7/8")	Pack 10

Part No.	Material	Work Type	Type	Description	Pack QTY
DA10904	Metal &INOX	Cutting	Flat	Ø115 x 1.0 x 22.23 mm (4-1/2" x 0.04" x 7/8")	Pack 50
DA10905	Metal &INOX	Cutting	Flat	Ø125 x 1.0 x 22.23 mm (5" x 0.04" x 7/8")	Pack 50

Abrasive Depressed Metal Grinding Wheel



FEATURES

- High quality abrasive discs
bring safety, productivity in metalworking
- Two sides full sheets of fiberglass
For durability and safety
- Standard hub allows
For fast, tool-free wheel changes
- Proprietary aluminum oxide grain combination
Allows aggressive cutting & more cuts
- Cover a wide range of metal cutting applications



DEPRESSED

Part No.	Material	Work Type	Type	Description	Pack QTY
DA10026	Metal	Grinding	Depressed	Ø100 x 6.0 x 16 mm (4" x 1/4" x 5/8")	Pack 5
DA10022	Metal	Grinding	Depressed	Ø115 x 6.0 x 22.23 mm (4-1/2" x 1/4" x 7/8")	Pack 5
DA10023	Metal	Grinding	Depressed	Ø125 x 6.0 x 22.23 mm (5" x 1/4" x 7/8")	Pack 5
DA10024	Metal	Grinding	Depressed	Ø180 x 6.0 x 22.23 mm (7" x 1/4" x 7/8")	Pack 5
DA10025	Metal	Grinding	Depressed	Ø230 x 6.0 x 22.23 mm (9" x 1/4" x 7/8")	Pack 5

MULTI-CUTTER ACCESSORIES

UNIVERSAL FIT SYSTEM



Multi-Cutter Accessories

FEATURES

- **Titanium-coated bi-metal blades**
Titanium-coated bi-metal blades provides up to 3x longer working life
- **Universal fit**
Universal FIT system blade can fit almost all brands of oscillation tool



Part No.	Description	Materials	Width	Pack QTY
DA12901	Extended Life Plunge Cutting Blades, Bi-metal, Titanium Coating	Wood, Nails, Metal, Thin Sheet Metal, PVC	32mm (1-1/4")	Pack 5



Part No.	Description	Materials	Pack QTY
DA12001	Extended Life Segmented Saw Blade, HSS, For PVC, Titanium Coating tip	Wood, Nails, Metal, Drywall, PVC	Pack 1



Accessory And Attachment Combo

Part No.	Description	Pack QTY
DA12902	5 x Plunge Cut Saw Blades (2 x Wood/Metal and plastic, 1 x Wood and Plastic, 1 x Wood with nails, 1 x Laminate), 1 x grout and mortar remover blade, 1 x segmented saw blade, 1x Flexible Scrape Blade	8pcs Mixed Blade Set



Multi-Cutter Accessories



Part No.	Description	Pack QTY
DA12002	Detail Sanding Plate	Pack 1



30pcs Assorted

Part No.	Description	Pack QTY
DA12003	30pcs Sanding Sheets, Hook&Loop System	Pack 30



Part No.	Description	Materials	Pack QTY
DA12004	Diamond Segment Saw Blade	Cutting edge for general purpose grout and mortar removal	Pack 1



Part No.	Description	Materials	Pack QTY
DA12005	Diamond Tri Carbide Rasp	Reduces Materials build-up and Clogging	Pack 1



Part No.	Description	Materials	Pack QTY
DA12006	Flexible Scrape Blad	Flooring Work	Pack 1

NOTE

[illegible]