

Part of the battery platform
20 V LIXES
ONE BATTERY FOR ALL DEVICES

schepach
Germany

20 V Catalogue

Workshop &
garden tools



WARRANTY AND BENEFITS

- 6 – 7 Warranty
- 8 – 13 Benefits

MOBILE WORKSHOP

- 14 – 21 Mobile Workshop

DRILLS AND SCREWDRIVERS

- 22 – 25 Cordless drills
- 26 – 35 Cordless impact drills
- 36 – 41 Cordless impact screwdrivers
- 42 – 43 Cordless drywall screwdriver

CONSTRUCTION MACHINERY

- 44 – 45 Cordless demolition hammer
- 46 – 53 Cordless hammer drills
- 54 – 55 Cordless paint spraying system
- 56 – 57 Cordless paint and mortar stirrer

SAWING AND CUTTING EQUIPMENT

- 58 – 63 Cordless angle grinders
- 64 – 67 Cordless jigsaws
- 68 – 75 Cordless reciprocating saws
- 76 – 77 Cordless plunge saw
- 78 – 81 Cordless hand-held circular saws
- 82 – 83 Cordless metal band saw
- 84 – 85 Cordless sliding cross-cut mitre saw
- 86 – 87 Cordless multifunctional tool

GRINDING EQUIPMENT

- 88 – 91 Cordless orbital sander
- 92 – 93 Cordless multifunction grinder
- 94 – 95 Cordless belt sander

WOODWORKING MACHINES

- 96 – 97 Cordless router
- 98 – 99 Cordless planer

COMPRESSED AIR SYSTEMS

- 100 – 101 Cordless hand-held compressor
- 102 – 103 Hybrid compressor
- 104 – 105 Cordless compressor

CLEANING SYSTEMS

- 106 – 109 Cordless hand-held vacuum cleaner
- 110 – 113 Cordless wet/dry vacuum cleaner
- 114 – 115 Cordless ash vacuum cleaner
- 116 – 117 Cordless pressure cleaner

WORKSHOP EQUIPMENT

- 118 – 121 Cordless work lights
- 122 – 123 Cordless workshop blower
- 124 – 125 Cordless jobsite radio
- 126 – 127 Cordless cartridge gun
- 128 – 129 Cordless hot melt glue gun
- 130 – 131 Cordless heat gun
- 132 – 133 Cordless staple and nail gun

CORDLESS MACHINE SET

- 134 – 135 Cordless machine set

BATTERIES AND CHARGERS

- 208 – 209 Batteries
- 210 – 211 Battery charger
- 212 – 217 Starter kits



LAWN CARE

- 138 – 147 Battery-powered lawnmower
- 148 – 149 Cordless cylinder lawnmower
- 150 – 151 Cordless grass and edge trimmer
- 152 – 157 Cordless strimmer
- 158 – 161 Cordless brush cutter

SHRUB AND HEDGE CARE

- 162 – 163 Cordless grass & hedge trimmer
- 164 – 165 Cordless pruning shears
- 166 – 169 Cordless multi-function device
- 170 – 175 Cordless hedge trimmers

TREE CARE

- 176 – 179 Cordless pruning saw
- 180 – 181 Cordless top handle chainsaw
- 182 – 185 Cordless chainsaws

WORKING WITH LEAVES, SOIL AND GROUND


- 186 – 187 Cordless leaf blower
- 188 – 189 Cordless leaf vacuum/blower
- 190 – 191 Cordless weed sweeper
- 192 – 195 Cordless garden tillers
- 196 – 197 Cordless hand-held spreader
- 198 – 199 Cordless earth auger

CLEANING SYSTEMS

- 200 – 201 Cordless sweeper
- 202 – 203 Cordless snow blower
- 204 – 205 Cordless rain barrel pump
- 206 – 207 Cordless garden pump

BATTERIES AND CHARGERS

- 208 – 209 Batteries
- 210 – 211 Battery charger
- 212 – 217 Starter kits

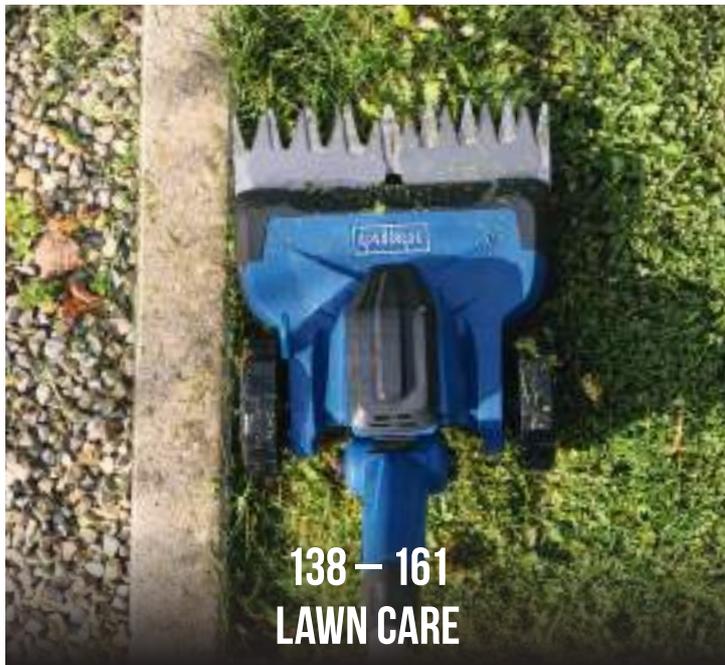

10 years

Warranty



We want to make sure that you can implement all the projects in your workshop and garden without any concern.

That is why we don't just ensure ideal value for money with our products but also reliable quality and maximum safety.

And so that you don't have to worry in the future, Scheppach offers a warranty promise: 10 years' warranty on all devices.

* You can find the warranty conditions here. Register your device and take advantage of our warranty promise.



For all your

Projects

Discover our battery-powered family now!



Discover the future

The wireless way of working

Whether screwing, drilling, sawing, lawn mowing or hedge trimming - only a single battery is needed to power all your devices without cables. The Scheppach IXES 20 Volt series (Intelligent Exchange Series) therefore not only allows easy switching between different tools but also flexible working without cables getting tangled up.

Over 100 machines and ever-new developments:



Benefits

Our 20 V system



Suitable for all kinds of work around the house, garden, yard and workshop.



1 battery for all devices - preserving resources and promoting sustainability.



Flexible working without cables or exhaust fumes - simply insert the battery and get started.



Powerful tools, also suitable for extensive and challenging projects.



Highest quality and maximum safety, so you can always reliably complete all your projects.



One battery for all devices

For maximum freedom of movement



LONG-LASTING BATTERIES FOR ALL REQUIREMENTS

Our powerful next-generation Lithium-ion batteries ensure **reliability and a long service life**. Innovative individual cell management also guarantees efficient use and **maximum battery run time**. Whether small tasks around the home and workshop or major, complex work - thanks to the compact design and low weight, practically all projects can be implemented.



BATTERY MANAGEMENT SYSTEM - THE INTELLIGENT CONTROL ELECTRONICS

Our Battery Management System (BMS) **continuously monitors and regulates all safety-related processes** as well as device performance. Additionally, individual cell management ensures equal charging and discharging of the battery cells, thus reliably protecting from overheating as well as excess voltage.



- + EXTENDED SERVICE LIFE
- + MAXIMUM DEVICE POWER
- + MAXIMUM SAFETY
- + LONGER BATTERY RUN TIMES

Double your performance

For demanding work



TWICE THE BATTERY POWER - FOR SPECIAL CHALLENGES

Particularly powerful devices such as some selected lawnmowers, chainsaws or hedge trimmers require more power than a battery can provide. If this is the case, we simply add another battery - thereby generating $20\text{ V} + 20\text{ V} = 40\text{ V}$. This not only doubles the voltage (V), but also the power (W) - so you can tackle any challenge!

$20\text{ V} + 20\text{ V} = 40\text{ V}$





Rechargeable battery technology that thinks for itself



SMART TECHNOLOGY - MAXIMUM PERFORMANCE FOR YOUR PROJECTS

In addition to battery run times, the provided output is critical for tougher tasks in particular. The permanent communication between battery and device as well as smart control in our tools therefore ensure maximum performance as well as long service life and run times. Furthermore, our batteries are equipped with modern RFID equipment and feature state of the art technologies.



Thanks to **Cell Balancing**, all the battery's safety-related parameters are checked at all times and the equal use of each cell is controlled - this guarantees efficient use and maximum battery run times.



Brushless drive technology for maximum efficiency



MAINTENANCE-FREE BRUSHLESS MOTORS FOR MORE POWER

Many of our Scheppach 20-volt machines are equipped with innovative **brushless motor technology**.

The brushless motors are maintenance-free and ensure significantly higher device performance with a longer service life and longer running times. Ideal also for major projects - thanks to low heat development, the brushless tools can be operated for extended periods even at high performance without overheating.

+ SERVICE LIFE UP TO 10 TIMES LONGER


+ LOWER THERMAL MOTOR LOAD

+ MAXIMUM EFFICIENCY THANKS TO OPTIMAL POWER TRANSFER

+ LONGER BATTERY LIFE, THANKS TO LOWER POWER CONSUMPTION



C-DTB74/1-X
C-DTB74/2-X

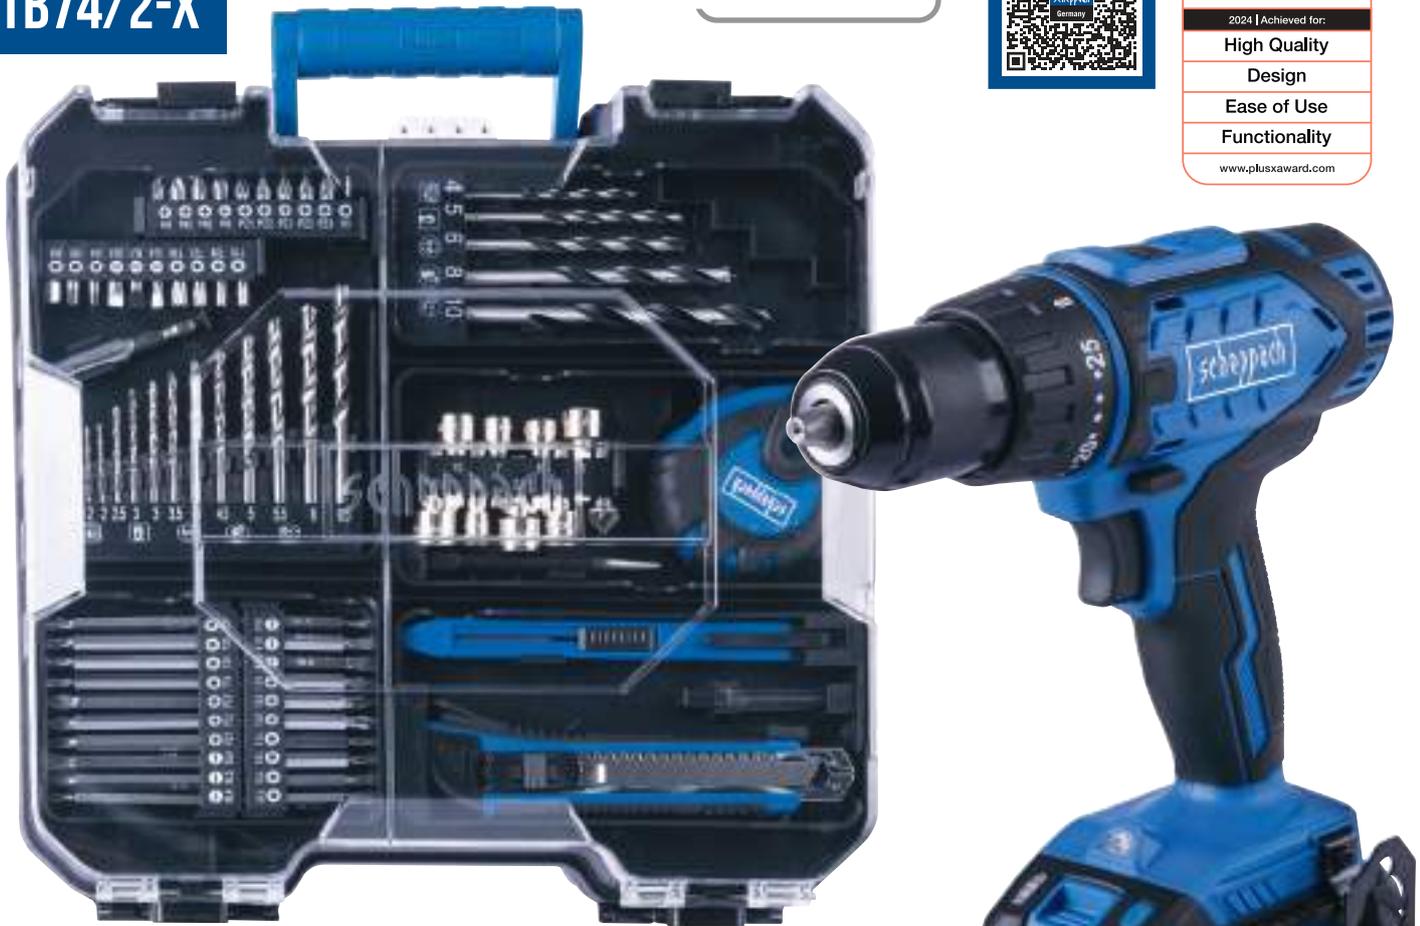

Also available with
2x 20 V / 2.0 Ah battery and
2.4 A battery charger (C-DTB74/2-X)

PRODUCT DATA	
Tool kit	
Dimensions L x W x H	230 x 80 x 190 mm
Tool box	74-part. 1x utility knife, 1x carpenter's pencil, 1x lead, 1x tape measure (5 m), 1x centre punch,
Tool set contents	1x wood countersink, 8x socket adapters 1/4" 5x wood drill bits, 14x metal drill bits, 10x bit inserts 50 mm long, 10x bit inserts 75 mm long, 20x bit inserts 25 mm long 1x bit holder 1/4"
Case material	PE-HD
Drill driver	
Engine type	Brush motor
Battery voltage	20 V
Max. torque	50 Nm
Nominal idle speed	1. Gear: 0 – 400 rpm 2. Gear: 0 – 1500 rpm
Torque levels	25 + 1
Chuck clamping range	1.5 - 13 mm
Max. drill Ø	30 mm (wood) 13 mm (metal)
LED	Yes
Lock function	Automatic

LOGISTICAL DATA		
	C-DTB74/1-X	C-DTB74/2-X
Weight net / gross	5.2 / 5.6 kg	5.8 / 6.1 kg
Packaging dimensions	340 x 165 x 355 mm	340 x 165 x 355 mm
Item number	5909315900	5909316900
EAN	4046664216742	4046664216759
20 containers	1078 pcs.	1078 pcs.
40 containers	2230 pcs.	2230 pcs.
40 HQ containers	2232 pcs.	2232 pcs.

74-part tool set

50 Nm

1. Gear: 0 – 400 rpm
2. Gear: 0 – 1500 rpm

30 mm (wood)
13 mm (metal)

Ø 1.5 – 13 mm

20 V





74-part tool set

- 1 x utility knife
- 1 x carpenter's pencil
- 1 x lead
- 1 x tape measure (5 m)
- 1 x centre punch
- 1 x wood countersink
- 8 x socket adapter 1/4"
- 5 x wood drill bits
- 14 x metal drill bits
- 10 x bit inserts, 50 mm long
- 10 x bit inserts, 75 mm long
- 20 x bit inserts, 25 mm long
- 1 x bit holder 1/4"



Durable thanks to high-quality materials.

2.0 Ah



4.0 Ah



Screws in softwood: 4 x 35 mm

450 pcs.

900 pcs.

Drilling holes in bricks: 6 x 50 mm

60 pcs.

120 pcs.

Specification per battery charge
Running time and performance may vary depending on external conditions.




Practical belt clip – ideal for working on a ladder.



Practical LED work light ensures optimum illumination even in poor lighting conditions.



Rotational speed preset via powerful 2-speed gearbox.

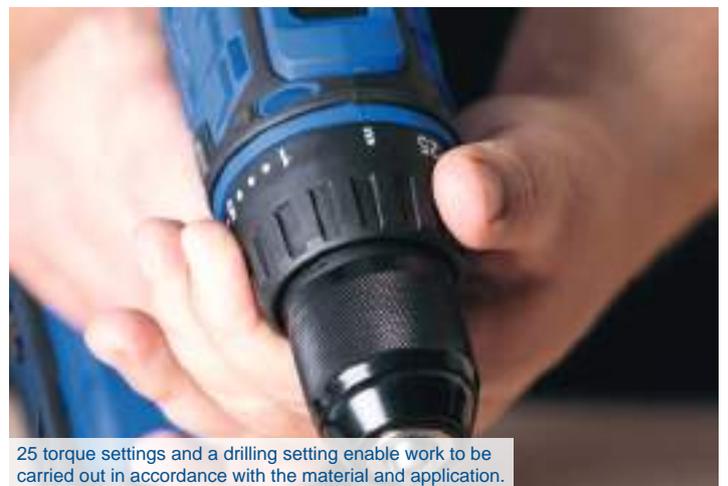

25 torque settings and a drilling setting enable work to be carried out in accordance with the material and application.

+ INCLUDING

- Cordless drill
- 1 x 20 V / 2.0 Ah battery (5909315900)
- 2x 20 V / 2.0 Ah battery (5909316900)
- 2.4 A battery charger
- 74-part tool set



C-DTB74/1-X
C-DTB74/2-X



Also available with 2x 20 V / 2.0 Ah battery and 2.4 A battery charger (C-DTB74/2-X)

PRODUCT DATA

Tool kit	
Dimensions L x W x H	330 x 140 x 315 mm
Tool box	74-part.
Tool set contents	1x utility knife, 1x carpenter's pencil, 1x lead, 1x tape measure (5 m), 1x centre punch, 1x wood countersink, 8x socket adapters 1/4" 5x wood drill bits, 14x metal drill bits, 10x bit inserts 50 mm long, 10x bit inserts 75 mm long, 20x bit inserts 25 mm long, 1x bit holder 1/4"
Case material	PE-HD

Drill driver	
Engine type	Brush motor
Battery voltage	20 V
Max. torque	50 Nm
Nominal idle speed	1. Gear: 0 – 400 rpm 2. Gear: 0 – 1500 rpm
Torque levels	25 + 1
Chuck clamping range	1.5 - 13 mm
Max. drill Ø	30 mm (wood), 13 mm (metal)
LED	Yes
Lock function	Automatic

LOGISTICAL DATA

	C-DTB74/1-X	C-DTB74/2-X
Weight net / gross	5.2 / 5.5 kg	5.7 / 6 kg
Packaging dimensions	335 x 145 x 320 mm	335 x 145 x 320 mm
Item number	5909336900	5909337900
EAN	4046664251668	4046664251699
20 containers	1078 pcs.	1078 pcs.
40 containers	2820 pcs.	2820 pcs.
40 HQ containers	3440 pcs.	3440 pcs.

74-part tool set



50 Nm



1. Gear: 0 – 400 rpm
2. Gear: 0 – 1500 rpm



Ø 1.5 mm – 13 mm



Mobil



20 V





74-part tool set

- 1 x utility knife
- 1 x carpenter's pencil
- 1 x lead
- 1 x tape measure (5 m)
- 1 x centre punch
- 1 x wood countersink
- 8 x socket adapter 1/4"
- 5 x wood drill bits
- 14 x metal drill bits
- 10 x bit inserts, 50 mm long
- 10 x bit inserts, 75 mm long
- 20 x bit inserts, 25 mm long
- 1 x bit holder 1/4"



Robust carrying case – for mobile use and space-saving storage.

2,0 Ah	4,0 Ah
	
Screws in softwood: 4 x 35 mm	
450 pcs.	900 pcs.
Drilling holes in bricks: 6 x 50 mm	
60 pcs.	120 pcs.
Specification per battery charge Running time and performance may vary depending on external conditions	



Durable thanks to high-quality materials.



Practical belt clip – ideal for working on a ladder.



Practical LED work light ensures optimum illumination even in poor lighting conditions.



Rotational speed preset via powerful 2-speed gearbox.



25 torque settings and a drilling setting enable work to be carried out in accordance with the material and application.

+ INCLUDING

- Cordless drill
- 1x 20 V / 2.0 Ah battery (5909336900)
- 2x 20 V / 2.0 Ah battery (5909337900)
- 2.4 A battery charger
- 74-part tool set



C-CDTB74/1-X

C-CDTB74/2-X

Part of the battery platform

20V LIXES

ONE BATTERY FOR ALL DEVICES



PLUS X AWARD

2024 | Achieved for:

High Quality

Design

Ease of Use

Functionality

www.plusaward.com



Also available with
2x 20 V / 2.0 Ah battery and
2.4 A battery charger (C-DTB74/2-X)

PRODUCT DATA

Tool kit	
Dimensions L x W x H	230 x 80 x 190 mm
Tool box	74-part.
Tool set contents	1x utility knife, 1x carpenter's pencil, 1x lead, 1x tape measure (5 m), 1x centre punch, 1x wood countersink, 8x socket adapters 1/4" 5x wood drill bits, 14x metal drill bits, 10x bit inserts 50 mm long, 10x bit inserts 75 mm long, 20x bit inserts 25 mm long 1x bit holder 1/4"
Case material	PE-HD
Hammer drill	
Engine type	Brush motor
Battery voltage	20 V
Max. torque	50 Nm
Number of impacts	1. Gear: 0 – 6000 bpm 2. Gear: 0 – 22,500 bpm
Nominal idle speed	1. Gear: 0 – 400 rpm 2. Gear: 0 – 1500 rpm
Torque levels	25 + 1
Chuck clamping range	1.5 - 13 mm
Max. drill Ø	30 mm (wood) 13 mm (metal) 13 mm (concrete)
LED	Yes
Lock function	Automatic

LOGISTICAL DATA

	C-CDTB74/1-X	C-CDTB74/2-X
Weight net / gross	5.4 / 5.8 kg	5.7 / 6.3 kg
Packaging dimensions	340 x 165 x 355 mm	340 x 165 x 355 mm
Item number	5909317900	5909318900
EAN	4046664216766	4046664216773
20 containers	1078 pcs.	1078 pcs.
40 containers	2232 pcs.	2232 pcs.
40 HQ containers	2232 pcs.	2232 pcs.

74-part tool set



50 Nm



1. Gear: 0 – 400 rpm
2. Gear: 0 – 1500 rpm



30 mm (wood)
13 mm (metal)
13 mm (concrete)



Ø 1.5 – 13 mm



20 V





74-part tool set

- 1 x utility knife
- 1 x carpenter's pencil
- 1 x lead
- 1 x tape measure (5 m)
- 1 x centre punch
- 1 x wood countersink
- 8 x socket adapter 1/4"
- 5 x wood drill bits
- 14 x metal drill bits
- 10 x bit inserts, 50 mm long
- 10 x bit inserts, 75 mm long
- 20 x bit inserts, 25 mm long
- 1 x bit holder 1/4"



Durable thanks to high-quality materials.

2.0 Ah



4.0 Ah



Screws in softwood: 4 x 35 mm

450 pcs.

900 pcs.

Drilling holes in bricks: 6 x 50 mm

60 pcs.

120 pcs.

Specification per battery charge
Running time and performance may vary depending on external conditions.



Practical belt clip – ideal for working on a ladder.



Practical LED work light ensures optimum illumination even in poor lighting conditions.



Rotational speed preset via powerful 2-speed gearbox.



25 torque settings and a drilling setting enable work to be carried out in accordance with the material and application.

UNIVERSAL APPLICATION



Screws



Drilling



Hammer-drilling

+ INCLUDING

- Cordless impact drill
- 1 x 20 V / 2.0 Ah battery (5909317900)
- 2 x 20 V / 2.0 Ah battery (5909318900)
- 2.4 A battery charger
- 74-part tool set



C-ATB15/1-X – SET S C-ATB15/1-X – SET L

Part of the battery platform
20 V LIXES
ONE BATTERY FOR ALL DEVICES



Click here for
optional accessories



Also available with 20 V / 4.0 Ah battery and 2.4 A battery charger (C-ATB15/1-X – SET L)

PRODUCT DATA	
Angle grinder dimensions L x W x H	395 x 240 x 115 mm
Engine type	Brush motor
Battery voltage	20 V / 2.0 Ah Lithium
Power battery charger	230 – 240 V~ / 50 Hz / 2.4 A
Rated speed	2500 – 10,000 rpm
Disc Ø	125 mm
Tool receiver	M14
Lock function	Spindle lock
Soft start	Yes
Overload protection	Yes

	LOGISTICAL DATA	
	SET S	SET L
	1x 2.0 Ah battery 1x 2.4 A charger	1x 4.0 Ah battery 1x 2.4 A charger
Weight net / gross	3.2 / 6.2 kg	3.5 / 6.5 kg
Packaging dimensions	390 x 175 x 340 mm	390 x 175 x 340 mm
Item number	5909356900	5909359900
EAN	4046664290292	4046664292272
20 containers	1050 pcs.	1050 pcs.
40 containers	2210 pcs.	2210 pcs.
40 HQ containers	2600 pcs.	2600 pcs.

1.7 kg

Mobil

15-part accessory set

SOFT
START

Overload protection

20 V



UNIVERSAL APPLICATION



Cutting off



Sanding



Deburring



3-position front handle with non-slip soft grip.



Slim housing design with soft grip and aluminium front allows for working in tight spaces.



Speed adjustment from 2500 to 10,000 rpm in 6 steps via an adjustment wheel.



Storage compartment for the two-hole mounting key.



Easy tool change thanks to spindle lock.

Cutting performance: Round pipe \varnothing 12 mm	
2.0 Ah	4.0 Ah
	
65 cuts	130 cuts
Specification per battery charge Running time and performance may vary depending on external conditions	



Tool-free adjustable, burst-proof protective hood.

+ INCLUDING

- 10x cutting wheels (1 mm)
- 3x roughing discs (6 mm)
- 2x flat discs
- 1x cordless angle grinder
- 1x 2.4 A battery charger
- 1x 20 V / 2.0 Ah battery (5909356900)
- 1x 20 V / 4.0 Ah battery (5909359900)



CORDLESS DRILL – SET

C-DD45-X – SET S

2in1

- Screwdriving function
- Drilling function



PRODUCT DATA

Dimensions L x W x H	200 x 200 x 80 mm
Engine type	Brush motor
Battery voltage	20 V
Max. torque	45 Nm
Idle speed	1. Gear: 0 – 420 rpm 2. Gear: 0 – 1500 rpm
Torque levels	25 + 1
Chuck clamping range	1.5 - 13 mm
Max. drill Ø	30 mm (wood) 13 mm (metal)
LED	Yes

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	1.3 / 1.7 kg	2.1 / 3.1 kg
Packaging dimensions	265 x 265 x 85 mm	360 x 265 x 98 mm
Item number	5909238900	5909238400
EAN	4046664216582	4046664222378
20 containers	3870 pcs.	2358 pcs.
40 containers	8125 pcs.	4978 pcs.
40 HQ containers	9575 pcs.	5850 pcs.

45 Nm



1. Gear: 0 – 420 rpm
2. Gear: 0 – 1500 rpm



30 mm (wood)
13 mm (metal)



Ø 1.5 – 13 mm



LED



20 V



2.0 Ah

4.0 Ah



Screws in softwood: 4 x 35 mm

450 pcs.

900 pcs.

Drilling holes in bricks: 6 x 50 mm

60 pcs.

120 pcs.

Specification per battery charge
Running time and performance may vary depending on external conditions.



Powerful cordless drill with 2-in-1 function: screwdriving and drilling – ideal for the home, garden, construction site or mobile use.



25 torque stages and 1 drilling stage for working in line with the material and application.



Rotational speed preset via powerful 2-speed gearbox.




Practical LED work light with 10 seconds extended lighting duration after switching off, it ensures even in poor lighting conditions optimal illumination.



Practical belt clip – ideal for working on a ladder.

UNIVERSAL APPLICATION

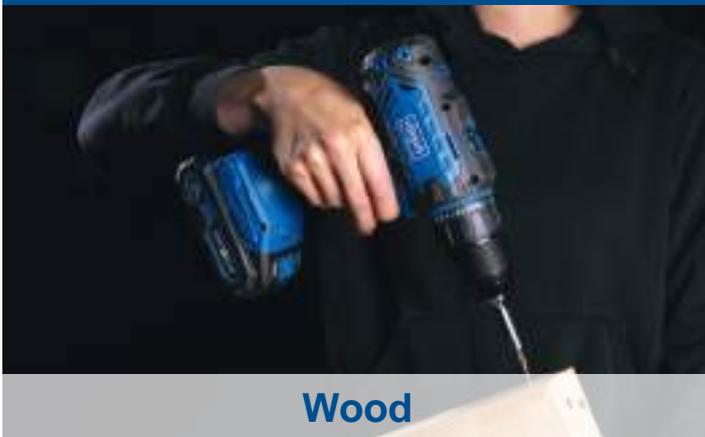

Wood



Metal

+ INCLUDING

- Belt clip
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS DRILL – SET

BC-DD60-X – SET S



BRUSHLESS

PRODUCT DATA	
Dimensions L x W x H	195 x 75 x 195 mm
Engine type	Brushless motor
Battery voltage	20 V
Max. torque	60 Nm
Idle speed	1. Gear: 0 – 450 rpm 2. Gear: 0 – 1600 rpm
Torque levels	25 + 1
Chuck clamping range	1.5 - 13 mm
Max. drill Ø	38 mm (wood) 13 mm (metal)
LED	Yes

LOGISTICAL DATA		
	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	1.2 / 1.7 kg	2.2 / 2.5 kg
Packaging dimensions	250 x 250 x 90 mm	400 x 235 x 100 mm
Item number	5909239900	5909239400
EAN	4046664216728	4046664222361
20 containers	4225 pcs.	2230 pcs.
40 containers	8925 pcs.	4710 pcs.
40 HQ containers	10500 pcs.	5536 pcs.

60 Nm

1. Gear: 0 – 450 rpm
2. Gear: 0 – 1600 rpm

38 mm (wood)
13 mm (metal)

Ø 1.5 – 13 mm

LED

20 V



Screws in softwood: 4 x 35 mm

2.0 Ah

4.0 Ah



585 pcs.

1170 pcs.

Specification per battery charge
Running time and performance may vary depending on external conditions.



Powerful cordless drill – ideal for home, garden, construction site or mobile use.

UNIVERSAL APPLICATION



Wood



Metal



The high-quality and robust quick-release metal drill chuck has a clamping range of 1.5–13 mm with automatic spindle lock.



Practical LED work light with 10 seconds of extended lighting time after switching off ensures optimum illumination even in poor light conditions.



Rotational speed preset via powerful 2-speed gearbox.



Quick, tool-free switching between drilling and screwdriving functions.

25 torque stages and 1 drilling stage for working in line with the material and application.

+ INCLUDING

- Belt clip
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS IMPACT DRILL – SET

C-CD45-X – SET S



PRODUCT DATA

Dimensions L x W x H	230 x 100 x 220 mm
Engine type	Brush motor
Battery voltage	20 V
Max. torque	45 Nm
Number of impacts	6750 - 24000 bpm
Idle speed	1. Gear: 0 – 420 rpm 2. Gear: 0 – 1500 rpm
Torque levels	19 + 1 + 1
Chuck clamping range	1.5 - 13 mm
Max. drill Ø	30 mm (wood) 13 mm (metal) 13 mm (concrete)
LED	Yes

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	1.4 / 1.8 kg	approx. 1.4 / 2.8 kg
Packaging dimensions	385 x 260 x 90 mm	280 x 255 x 85 mm
Item number	5909236900	5909236400
EAN	4046664216711	4046664222354
20 containers	3650 pcs.	4800 pcs.
40 containers	7750 pcs.	10175 pcs.
40 HQ containers	9100 pcs.	11950 pcs.

45 Nm

1. Gear: 0 – 420 rpm
2. Gear: 0 – 1600 rpm

30 mm (wood)
13 mm (metal)
13 mm (concrete)

6750 - 24000 bpm

Ø 1.5 – 13 mm

20 V



2.0 Ah	4.0 Ah
	
Screws in softwood: 4 x 35 mm	
450 pcs.	900 pcs.
Drilling holes in bricks: 6 x 50 mm	
60 pcs.	120 pcs.
Specification per battery charge Running time and performance may vary depending on external conditions.	



High output, thanks to a max. 45 Nm torque



19 torque levels, 1 drilling level and 1 impact drilling level allow operation to suit the material and application.



Speed preset via powerful 2-speed gearbox and switchable hammer mechanism.



Practical LED work light ensures optimum illumination even in poor lighting conditions.



Steplessly adjustable speed using the on/off switch.

UNIVERSAL APPLICATION



Screws



Drilling



Hammer-drilling

+ INCLUDING

- Belt clip
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS IMPACT DRILL – SET

BC-CD50SC-X – SET S



BRUSHLESS

PRODUCT DATA	
Dimensions L x W x H	167 x 80 x 215 mm
Engine type	Brushless motor
Battery voltage	20 V
Max. torque	50 Nm
Number of impacts	0 – 28,900 bpm
Idle speed	1. Gear: 0 – 450 rpm 2. Gear: 0 – 1700 rpm
Torque levels	20 + 1 + 1
Chuck clamping range	0.8 – 10 mm
Max. drill Ø	25 mm (wood) 5 mm (metal) 6 mm (concrete)
LED	Yes

LOGISTICAL DATA		
	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	1 / 1.2 kg	1.8 / 2.5 kg
Packaging dimensions	215 x 245 x 95 mm	370 x 245 x 95 mm
Item number	5909286900	5909286400
EAN	4046664290230	4046664301981
20 containers	4648 pcs.	2732 pcs.
40 containers	9628 pcs.	5656 pcs.
40 HQ containers	11,288 pcs.	6628 pcs.

50 Nm

1. Gear: 0 – 450 rpm
2. Gear: 0 – 1700 rpm

25 mm (wood)
5 mm (metal)
6 mm (concrete)

0 – 28,900 bpm

Ø 0.8 – 10 mm



UNIVERSAL APPLICATION



Screws



Drilling



Hammer-drilling



Practical LED work light ensures optimum illumination even in poor lighting conditions.



The sub-compact design is a space-saving, lightweight and efficient construction.



The high-quality and robust quick-release metal drill chuck has a clamping range of 0.8–10 mm with automatic spindle lock.



Speed preset via powerful 2-speed gearbox and switchable hammer mechanism.



Quick, tool-free switching between the drilling, screwdriving and hammer-drilling functions.

20 V



INCLUDING

- Belt clip
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger

schepach
Germany

CORDLESS IMPACT DRILL – SET

BC-CD60-X – SET S



BRUSHLESS

PRODUCT DATA

Dimensions L x W x H	200 x 80 x 200 mm
Engine type	Brushless motor
Battery voltage	20 V
Max. torque	60 Nm
Number of impacts	6750 - 24000 bpm
Idle speed	1. Gear: 0 – 450 rpm 2. Gear: 0 – 1600 rpm
Torque levels	19 + 1 + 1
Chuck clamping range	1.5 - 13 mm
Max. drill Ø	30 mm (wood) 13 mm (metal) 13 mm (concrete)
LED	Yes

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	1.3 / 1.6 kg	2.1 / 2.9 kg
Packaging dimensions	250 x 260 x 85 mm	420 x 235 x 100 mm
Item number	5909237900	5909237400
EAN	4046664218043	4046664222347
20 containers	4000 pcs.	4000 pcs.
40 containers	8450 pcs.	8450 pcs.
40 HQ containers	9100 pcs.	9100 pcs.

60 Nm

1. Gear: 0 – 450 rpm
2. Gear: 0 – 1600 rpm

30 mm (wood)
13 mm (metal)
13 mm (concrete)

6750 - 24000 bpm

Ø 1.5 – 13 mm

20 V



2.0 Ah	4.0 Ah
	
Screws in softwood: 4 x 35 mm	
850 pcs.	1700 pcs.
Drilling holes in bricks: 6 x 50 mm	
80 pcs.	160 pcs.
Specification per battery charge Running time and performance may vary depending on external conditions.	



UNIVERSAL APPLICATION



- +** INCLUDING
- Belt clip
 - 1x 20 V / 2.0 Ah battery
 - 1x 2.4 A battery charger



CORDLESS IMPACT DRILL – SET

BC-CD70SC-X – SET S

Part of the battery platform
20 V LIXES
 ONE BATTERY FOR ALL DEVICES



BRUSHLESS

PRODUCT DATA

Dimensions L x W x H	185 x 80 x 212 mm
Engine type	Brushless motor
Battery voltage	20 V
Max. torque	70 Nm
Number of impacts	1800 - 27000 bpm
Idle speed	1. Gear: 0 – 320 rpm 2. Gear: 0 – 1800 rpm
Torque levels	20 + 1 + 1
Chuck clamping range	2 - 13 mm
Max. drill Ø	30 mm (wood) 10 mm (metal) 8 mm (concrete)
LED	Yes

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	1.2 / 1.5 kg	approx. 2 / 3.1 kg
Packaging dimensions	245 x 260 x 95 mm	385 x 275 x 95 mm
Item number	5909288900	5909288400
EAN	4046664290254	4046664302025
20 containers	3804 pcs.	2288 pcs.
40 containers	7880 pcs.	4736 pcs.
40 HQ containers	9236 pcs.	5556 pcs.

70 Nm

1. Gear: 0 – 320 rpm
2. Gear: 0 – 1800 rpm

30 mm (wood)
10 mm (metal)
8 mm (concrete)

1800 - 27000 bpm

Ø 2 – 13 mm



UNIVERSAL APPLICATION



Screws



Drilling



Hammer-drilling



Practical control panel for regulating the speed and setting the quick-stop function.



The sub-compact design is a space-saving, lightweight and efficient construction.



Includes additional handle to reduce hand fatigue and provide more stable guidance of the appliance.



Speed preset via powerful 2-speed gearbox and switchable hammer mechanism.



Quick, tool-free switching between the drilling, screwdriving and hammer-rilling functions.

20 V



INCLUDING

- Additional handle
- Belt clip
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS IMPACT DRILL – SET

BC-CD 150-X – SET S



Click here for
optional accessories



PLUS X AWARD

2024 | Achieved for:

- High Quality
- Design
- Ease of Use
- Functionality

www.plusaward.com

Part of the battery platform

20V LIXES

ONE BATTERY FOR ALL DEVICES

BRUSHLESS

PRODUCT DATA

Dimensions L x W x H	189 x 79 x 220 mm
Engine type	Brushless motor
Battery voltage	20 V
Max. torque	150 Nm
Number of impacts	6400 - 30400 bpm
Idle speed	1. Gear: 0 – 1600 rpm 2. Gear: 0 – 1900 rpm
Torque levels	20 + 1 +1
Chuck clamping range	2 - 13 mm
Max. drill Ø	75 mm (wood) 13 mm (metal) 13 mm (concrete)
LED	Yes
Anti-Kickback function	Yes

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	1.7 / 2 kg	approx. 2.5 / 3.9 kg
Packaging dimensions	355 x 315 x 95 mm	355 x 330 x 95 mm
Item number	5909287900	5909287400
EAN	4046664290247	4046664302018
20 containers	2260 pcs.	2112 pcs.
40 containers	4680 pcs.	4376 pcs.
40 HQ containers	5484 pcs.	5128 pcs.

150 Nm



1. Gear: 0 – 1600 rpm
2. Gear: 0 – 1900 rpm



75 mm (wood)
13 mm (metal)
13 mm (concrete)



6400 - 30400 bpm



Ø 2 – 13 mm



UNIVERSAL APPLICATION



Screws



Drilling



Hammer-drilling



Practical LED work light ensures optimum illumination even in poor lighting conditions.



Anti-kickback function stops sudden kickbacks for maximum safety.



Includes additional handle to reduce hand fatigue and provide more stable guidance of the appliance.



Speed preset via powerful 2-speed gearbox and switchable hammer mechanism.



Quick, tool-free switching between the drilling, screwdriving and hammer-drilling functions.

20 V



INCLUDING

- Additional handle
- Belt clip
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



1/4" CORDLESS IMPACT DRILL – SET

C-ID180-X – SET S



LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	1.3 / 1.7 kg	approx. 1.2 / 2.6 kg
Packaging dimensions	240 x 240 x 90 mm	400 x 240 x 95 mm
Item number	5909245900	5909245400
EAN	4046664217848	4046664222422
20 containers	4225 pcs.	tba
40 containers	8925 pcs.	tba
40 HQ containers	10500 pcs.	tba

PRODUCT DATA

Dimensions L x W x H	230 x 185 x 80 mm
Engine type	Brush motor
Battery voltage	20 V
Torque max.	180 Nm
Nominal idle speed	0 – 2800 rpm
Number of impacts	0 – 3600 bpm
Retainer	1/4" hexagon socket
Quick-stop function	No
LED	Yes

180 Nm



0 – 2800 rpm



0 – 3600 bpm



1/4"



LED



20 V




UNIVERSAL APPLICATION




Ideal for more demanding tasks, such as inserting screws into metal.



High output, thanks to a max. 180 Nm torque.

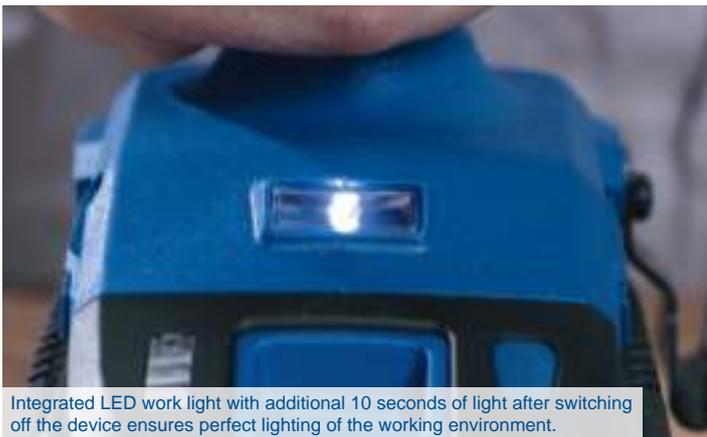

Integrated LED work light with additional 10 seconds of light after switching off the device ensures perfect lighting of the working environment.

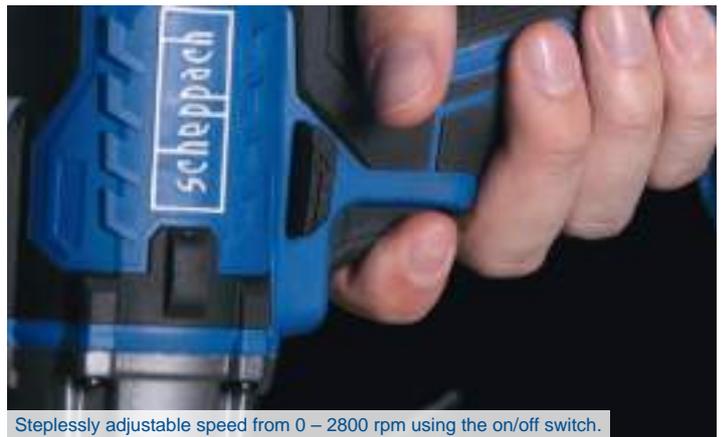

Steplessly adjustable speed from 0 – 2800 rpm using the on/off switch.



Practical belt clip – ideal for working on a ladder.



Easy bit replacement, thanks to 1/4 inch hex socket holder with locking sleeve.

Screws in softwood: 4 x 35 mm

2.0 Ah

4.0 Ah



325 pcs.

650 pcs.

Specification per battery charge
Running time and performance may vary depending on external conditions.

+ INCLUDING

- Belt clip
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger




1/2" CORDLESS IMPACT DRILL – SET

BC-IW350-X – SET S

Part of the battery platform

20 V IXES
ONE BATTERY FOR ALL DEVICES

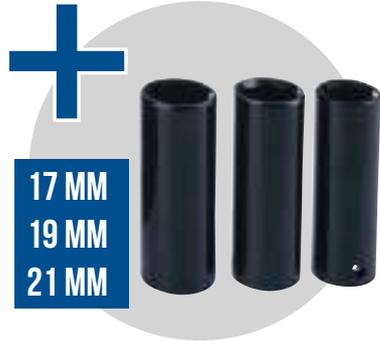

17 MM
19 MM
21 MM



BRUSHLESS

PRODUCT DATA	
Dimensions L x W x H	205 x 150 x 60 mm
Engine type	Brushless motor
Battery voltage	20 V
Torque max.	180 / 350 Nm 370 Nm in anti-clockwise rotation
Nominal idle speed	0 – 1800 rpm 0 – 2800 rpm
Number of impacts	0 – 3600 bpm
Retainer	1/2"
Quick-stop function	Yes
LED	Yes

	LOGISTICAL DATA	
	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	1.7 / 2 kg	approx. 1.3 / 3 kg
Packaging dimensions	235 x 210 x 90 mm	245 x 210 x 77 mm
Item number	5909246900	5909246400
EAN	4046664217831	4046664222415
20 containers	4700 pcs.	4280 pcs.
40 containers	9900 pcs.	9020 pcs.
40 HQ containers	11625 pcs.	10600 pcs.

→ 180 / 350 Nm
← 370 Nm

0 – 1800 rpm
0 – 2800 rpm

0 – 3600 bpm

1/2"

Quick-stop function

20 V



UNIVERSAL APPLICATION



Practical quick-stop function in anti-clockwise operation – the device turns off as soon as the screw has become loose to prevent it from falling down



Maximum breakaway torque of 370 Nm in anti-clockwise rotation.



Integrated LED work light with additional 10 seconds of light after switching off the device ensures perfect lighting of the working environment.



High output, thanks to a max. 350 Nm torque.



Wide range of uses, thanks to two torque levels: 180 Nm and 350 Nm.



1/2 inch holder with friction ring, ensuring secure positioning and easy replacement of the attachments.

Loosening bolts: 17 mm width across flats

2.0 Ah

4.0 Ah



500 pcs.

1000 pcs.

Specification per battery charge
Running time and performance may vary depending on external conditions.

+ INCLUDING

- Belt clip
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



1/2" CORDLESS SCREWDRIVER – SET

BC-IW1350-X – SET L

Part of the battery platform
20V LIXES
 ONE BATTERY FOR ALL DEVICES



Click here for

 optional accessories



PLUS X AWARD
 2024 | Achieved for:
 High Quality
 Design
 Ease of Use
 Functionality
 www.plusaward.com

BRUSHLESS

PRODUCT DATA	
Dimensions L x W x H	230 x 230 x 95 mm
Engine type	Brushless motor
Battery voltage	20 V
Torque max.	1356 Nm / 1898 Nm in anti-clockwise rotation
Nominal idle speed	0 – 650 rpm 0 – 1250 rpm 0 – 1550 rpm
Number of impacts	0 – 500 bpm 0 – 1500 bpm 0 – 1900 bpm
Retainer	1/2"
Quick-stop function:	Yes
LED	Yes

LOGISTICAL DATA		
	Single device	SET L
	Without battery / charger	1x 4.0 Ah battery 1x 2.4 A charger
Weight net / gross	2.9 / 4.1 kg	approx. 3 / 5.6 kg
Packaging dimensions	380 x 260 x 120 mm	383 x 257 x 117 mm
Item number	5909276900	55909276400
EAN	4046664287247	4046664287254
20 containers	3264 pcs.	3264 pcs.
40 containers	6984 pcs.	6984 pcs.
40 HQ containers	7184 pcs.	7184 pcs.

→ 150 / 400 / 1356 Nm
 ← 1898 Nm

0 – 650 rpm
 0 – 1250 rpm
 0 – 1550 rpm

0 – 500 bpm
 0 – 1500 bpm
 0 – 1900 bpm

1/2" receiver

Quick-Stop function

20 V



UNIVERSAL APPLICATION



Quick-stop function that can be switched on and off in anti-clockwise rotation – the device switches off as soon as the screw is loosened to prevent it from falling.



High performance thanks to a torque of up to 1356 Nm and a loosening torque of up to 1898 Nm.



Wide range of applications thanks to 4 adjustable torque settings with 150 Nm, 400 Nm, 1356 Nm and 1898 Nm.



Includes 3 sockets (17, 19, 21 mm), 1/2 inch to 1/4 inch bit adapter and belt clip.



Practical belt clip – ideal for working on a ladder.



1/2 inch receiver with friction ring for a secure fit and easy attachment changes.



With clockwise and anti-clockwise rotation function.

+ INCLUDING

- Socket (17 mm)
- Socket (19 mm)
- Socket (21 mm)
- 1/2" adapter
- Belt clip
- 1x 20 V / 4.0 Ah battery
- 1x 2.4 A battery charger

CORDLESS DRYWALL SCREWDRIVER – SET

BC-DWD400MS-X – SET S

Part of the battery platform

20 V LIXES
ONE BATTERY FOR ALL DEVICES

Click here for
optional accessories



PLUS X AWARD

2024 | Achieved for:

High Quality

Design

Ease of Use

Functionality

www.plusaward.com



BRUSHLESS

PRODUCT DATA

Dimensions L x W x H	380 x 80 x 220 mm
Engine type	Brushless motor
Battery voltage	20 V
Max. torque	30 Nm
Idle speed	0 – 4000 rpm
Tool receiver	1/4"
Screw specification	25-55 mm / Ø 4 mm
LED	Yes

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	1.8 / 2 kg	2.4 / 3.6 kg
Packaging dimensions	tba	435 x 222 x 98 mm
Item number	5909284900	5909284400
EAN	4046664289135	4046664301974
20 containers	4050 pcs.	2650 pcs.
40 containers	7950 pcs.	5200 pcs.
40 HQ containers	9850 pcs.	6425 pcs.

Depth Adjustment
Function



1/4"



0 – 4000 rpm



LED



20 V





User-friendly screwing thanks to integrated pressure coupling.




Powerful cordless drywall screwdriver specially designed for use in drywall construction for screwing plasterboard and chipboard.



Cordless operation with the Scheppach IXES 20 Volt series – all batteries and chargers in the system series can be combined with the cordless drywall screwdriver.



Magnetic bit holder (6.35 mm / 1/4") for easy tool receiver.

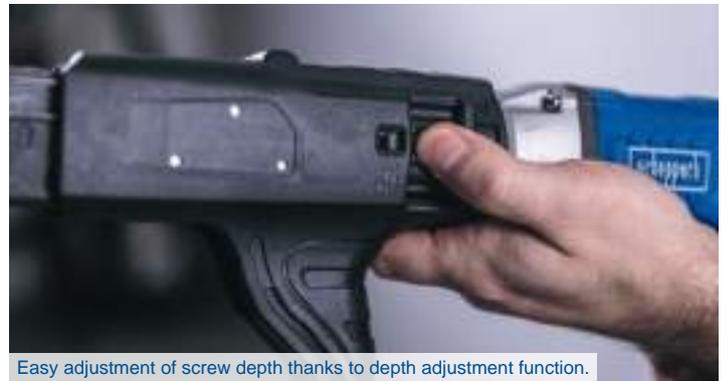

Easy adjustment of screw depth thanks to depth adjustment function.



Right-hand and anti-clockwise rotation function enables easy screwing in and out of screws.



Quick-release fastener enables tool-free assembly of the magazine.

+

 INCLUDING

- 1 x belt clip
- 1 x screw
- 1 x depth stop sleeve
- 1 x bit holder
- 1 x Phillips screwdriver bit (25 mm)
- 1 x slotted screwdriver bit (25 mm)
- 1x collated magazine attachment
- 1x screwdriver bit 165 mm
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS DEMOLITION HAMMER – SET

BC-AB 1500-X – SET L

Part of the battery platform
20 V LIXES
 ONE BATTERY FOR ALL DEVICES



Click here for
 optional accessories

BRUSHLESS

PRODUCT DATA

Dimensions L x W x H	440 x 90 x 240 mm
Engine type	Brushless motor
Battery voltage	20 V
Tool receiver	SDS-Max
Impact force	9 Joule
Number of impacts	3400 bpm
Chisel adjustment	12 positions
Anti-vibration technology	Yes
LED	Yes

LOGISTICAL DATA

	Single device	SET L
	Without battery / charger	1x 4.0 Ah battery 1x 2.4 A charger
Weight net / gross	4,4 / 7,5 kg	approx. 4.4 / 8.95 kg
Packaging dimensions	460 x 120 x 355 mm	430 x 110 x 360 mm
Item number	5908215900	5908215400
EAN	4046664287469	4046664286516
20 containers	1192 pcs.	1192 pcs.
40 containers	2468 pcs.	2468 pcs.
40 HQ containers	2894 pcs.	2894 pcs.



3400 bpm



360° rotatable handle



LED



20 V



UNIVERSAL APPLICATION



Tiles



Natural stone



Brick



Concrete



12 adjustable chisel positions for optimum adaptation to the respective application.



Integrated LED work light for perfect visibility of the work area, even in poor lighting conditions.




Easy and quick tool change thanks to SDS-Max receiver.



360° adjustable additional handle for ergonomic and fatigue-free working.



Anti-vibration technology for comfortable working.

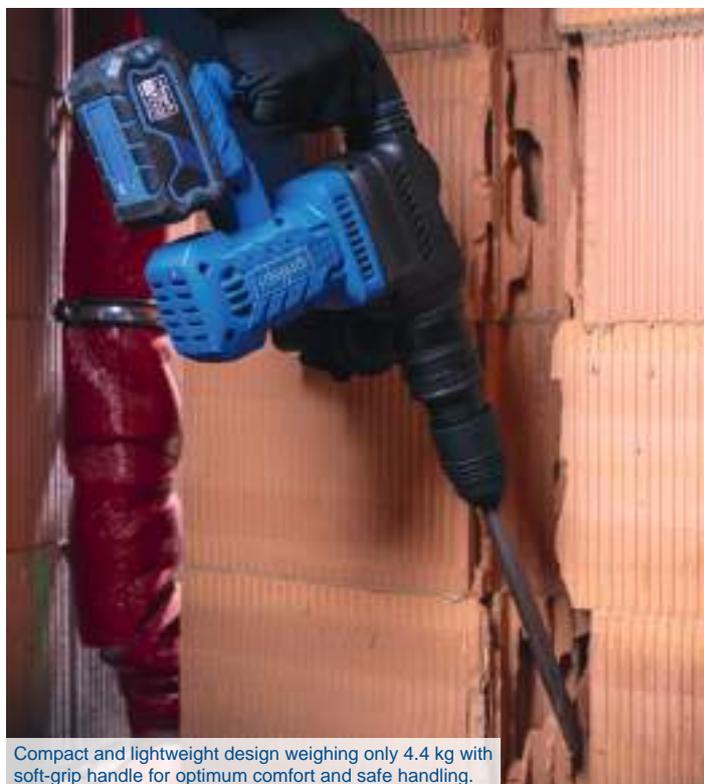

Compact and lightweight design weighing only 4.4 kg with soft-grip handle for optimum comfort and safe handling.

+ INCLUDING

- Pointed chisel
- Flat chisel
- Maintenance key
- Grease tube
- Transport case
- 1x 20 V / 4.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS HAMMER DRILL – SET

C-RHD130-X – SET S



Part of the battery platform
20 V LIXES
ONE BATTERY FOR ALL DEVICES

3 in 1

- Hammer drilling
- Drilling
- Screws



PRODUCT DATA

Dimensions L x W x H	244 x 228 x 74 mm
Engine type	Brush motor
Battery voltage	20 V
Tool receiver	SDS-Plus
Max. drill Ø	10 mm (concrete and stone), 8 (metal), 16 mm (wood)
Max. impact force	1.3 J
Max. stroke rate	6000 bpm
Idle speed	0 – 1100 rpm
LED	Yes
Anti-kickback function	No
Pulse function	No
Depth Record Function	No

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 20 V/2.0 Ah battery 1x 2.4 A battery charger
Weight net / gross	2.9 / 3.5 kg	3.7 / 4.5 kg
Packaging dimensions	365 x 125 x 300 mm	365 x 125 x 300 mm
Item number	5909249900	5909249400
EAN	4046664226789	4046664302186
20 containers	1660 pcs.	1660 pcs.
40 containers	3500 pcs.	3500 pcs.
40 HQ containers	4100 pcs.	4100 pcs.



10 mm (concrete/stone)
8 mm (metal)
16 mm (wood)



0 – 1100 rpm



6000 bpm



Slip-on quick-release
chuck





Plug-in quick-release drill chuck with SDS-Plus socket.



Tool-free drill bit change thanks to SDS-Plus drill chuck.



With clockwise and anti-clockwise rotation function.

2.0 Ah	4.0 Ah
	
Screws in softwood: 4 x 50 mm	
300 pcs.	600 pcs.
Drilling holes in bricks: 6 x 50 mm	
75 pcs.	150 pcs.
<p>Specification per battery charge Running time and performance may vary depending on external conditions.</p>	



LED work light ensures optimum illumination, even in poor lighting conditions.



Selector switch for quick, tool-free switching between functions.

UNIVERSAL APPLICATION



Hammer drilling



Drilling



Screws



20 V



INCLUDING

- 1x quick-release chuck
- 8x bits
- 3x SDS-Plus twist drill (6, 8, 10 mm)
- 3x HSS twist drill (5, 6, 8 mm)
- 1x magnetic bit holder

- 1x 50 g drill grease
- 1x transport case
- provides space for 2 batteries and 1 charger (battery and battery charger sold separately)
- 1x 20 V/2.0 Ah battery / 1x 2.4 A battery charger



CORDLESS HAMMER DRILL – SET

BC-RHD230-X – SET L

Part of the battery platform
20 V LIXES
 ONE BATTERY FOR ALL DEVICES

Scheppach BC-RHD230-X
 Entry level 1,5
Heimwerker Praxis 3/25
 Price/performance: good – very good



Click here for
 optional accessories



BRUSHLESS

PRODUCT DATA	
Dimensions L x W x H	210 x 105 x 270 mm
Engine type	Brushless motor
Battery voltage	20 V
Tool receiver	SDS-Plus
Max. drill Ø	27 mm (wood) 13 mm (metal) 24 mm (concrete)
Max. impact force	2.2 J
Max. stroke rate	5500 bpm
Idle speed	1400 rpm
LED	Yes
Anti-Kickback function	No
Pulse function	No
Depth Record Function	No

LOGISTICAL DATA		
	Single device	SET L
	Without battery / charger	1x 4.0 Ah battery 1x 2.4 A charger
Weight net / gross	2.6 / 3.2 kg	3.5 / 4.2 kg
Packaging dimensions	355 x 250 x 105 mm	505 x 250 x 100 mm
Item number	5909241900	5909241401
EAN	4046664216858	4046664249115
20 containers	2360 pcs.	1686 pcs.
40 containers	4980 pcs.	3562 pcs.
40 HQ containers	5860 pcs.	4186 pcs.



27 mm (wood)
13 mm (metal)
24 mm (concrete)



1400 rpm



5500 bpm



20 V



UNIVERSAL APPLICATION



Chiselling



Hammer drilling



Drilling



Additional 360° rotatable handle enables safe drilling and guidance of the machine.

2.0 Ah	4.0 Ah
	
Screws in softwood: 4 x 50 mm	
390 pcs.	780 pcs.
Drilling holes in bricks: 6 x 50 mm	
200 pcs.	400 pcs.
Specification per battery charge Running time and performance may vary depending on external conditions.	



Central selector switch for quick, tool-free switching between functions.



The SDS-Plus drill chuck enables tool-free drill bit changes.



Integrated LED work light with 10 seconds of extended lighting after switching off ensures optimum illumination of the working area.



Depth limiter stop made of sturdy metal for precise and repeatable drilling.

+ INCLUDING

- 3x concrete drill bits (6, 8, 10 mm)
- 1x pointed chisel (14 x 250 mm)
- 1x flat chisel (14 x 250 mm)
- Depth stop
- 1x 20 V / 4.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS HAMMER DRILL – SET

BC-DH290-X – SET L

Part of the battery platform
20 V LIXES
 ONE BATTERY FOR ALL DEVICES

Click here for


 optional accessories

PLUS X AWARD

2024 | Achieved for:

- High Quality
- Design
- Ease of Use
- Functionality

www.plusaward.com

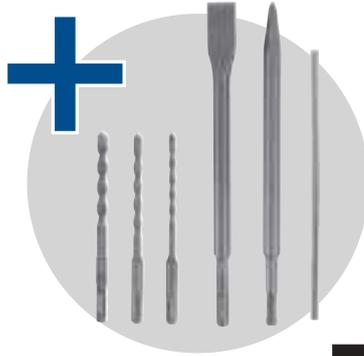

BRUSHLESS

PRODUCT DATA

Dimensions L x W x H	418 x 102 x 233 mm
Engine type	Brushless motor
Battery voltage	20 V
Tool receiver	SDS-Plus
Max. drill Ø	30 mm (wood) 13 mm (steel) 26 mm (concrete)
Max. impact force	2.8 J
Max. stroke rate	1000 - 4500 bpm
Idle speed	1000 rpm
LED	Yes
Anti-Kickback function	Yes
Pulse function	Yes
Depth Record Function	Yes

LOGISTICAL DATA

	Single device	SET L
	Without battery / charger	1x 4.0 Ah battery 1x 2.4 A charger
Weight net / gross	2.9 / 3.5 kg	4.2 / 5.9 kg
Packaging dimensions	480 x 280 x 95 mm	480 x 320 x 95 mm
Item number	5909274900	5909274400
EAN	4046664286561	4046664301998
20 containers	1784 pcs.	1572 pcs.
40 containers	3696 pcs.	3254 pcs.
40 HQ containers	4332 pcs.	3816 pcs.



30 mm (wood)
13 mm (steel)
26 mm (concrete)



225 – 1000 rpm



1000 - 4500 bpm



UNIVERSAL APPLICATION



Chisel



Hammer drilling



Drilling



Chisel alignment



Integrated LED work light for optimum illumination of the work area, even in poor lighting conditions.



Anti-kickback function: The hammer drill switches off in the event of sudden rotational movements, thus protecting against injury.



Easy to operate thanks to a selector switch for quick switching between the 4 functions.



4 special functions can be set via the control panel.



Additional 360° rotatable handle enables safe drilling and guidance of the machine.



The SDS-Plus drill chuck enables quick, tool-free drill bit changes.

Pulse function



20 V



+ INCLUDING

- Additional handle
- 3x concrete drill bits (6, 8, 10 mm)
- 1x pointed chisel (14 x 250 mm)
- 1x flat chisel (14 x 250 mm)
- 1x depth stop
- 1x 20 V / 4.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS HAMMER DRILL – SET

BC-DH300DFS-X – SET L

Part of the battery platform
20 V LIXES
 ONE BATTERY FOR ALL DEVICES

Click here for
 optional accessories



BRUSHLESS

PRODUCT DATA

Dimensions L x W x H	860 x 290 x 270 mm
Engine type	Brushless motor
Battery voltage	20 V
Tool receiver	SDS-Plus
Max. drill Ø	30 mm (wood) 13 mm (steel) 26 mm (concrete)
Max. impact force	2.8 J
Max. stroke rate	4440 bpm
Idle speed	0 – 1000 rpm
LED	Yes
Anti-Kickback function	Yes
Pulse function	Yes
Depth Record Function	Yes

LOGISTICAL DATA

	Single device	SET L
	Without battery / charger	1x 4.0 Ah battery 1x 2.4 A charger
Weight net / gross	4.2 / 6 kg	5.3 / 7.3 kg
Packaging dimensions	350 x 255 x 265 mm	355 x 260 x 255 mm
Item number	5906841900	5906841400
EAN	4046664290278	4046664307761
20 containers	1184 pcs.	tba
40 containers	2452 pcs.	tba
40 HQ containers	2875 pcs.	tba



UNIVERSAL APPLICATION



Chisel



Hammer drilling



Drilling



Chisel alignment



The SDS-Plus drill chuck enables quick, tool-free drill bit changes.



4 special functions can be set via the control panel.



Additional 360° rotatable handle enables safe drilling and guidance of the machine.



Easy to operate thanks to a selector switch for quick switching between the 4 functions.



Adjustable depth stop for precise hole depths.



No tools required for fitting the extraction.

Pulse function



20 V



+ INCLUDING

- Additional handle
- 1x depth stop
- Extraction system
- 1x 20 V / 4.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS PAINT SPRAYING SYSTEM – SET

C-APS700-X – SET S

Part of the battery platform
20 V LIXES
 ONE BATTERY FOR ALL DEVICES



PRODUCT DATA

Dimensions L x W x H	330 x 135 x 300 mm
Engine type	Brush motor
Battery voltage	20 V
Max. flow rate	700 ml/min
Max. area output	2 m ² /min / 120 m ² /h
Max. viscosity	55 DIN/sec
Container volume	1000 ml

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	1.2 / 1.5 kg	approx. 1.9 / 2.4 kg
Packaging dimensions	354 x 127 x 256 mm	407 x 318 x 128 mm
Item number	5906006900	5906006400
EAN	4046664287452	4046664302001
20 containers	2048 pcs.	1296 pcs.
40 containers	4224 pcs.	2640 pcs.
40 HQ containers	4752 pcs.	3080 pcs.

120 m²/h

700 ml/min

HVLP low-pressure technology

3 adjustable spray patterns

1000 ml

20 V



UNIVERSAL APPLICATION



Furniture



Fences



Doors



Bicycles



Walls

Suitable for standard paints, varnishes and glazes with a viscosity of up to 55 DIN sec.



Fast work progress thanks to an area coverage of up to 120 m²/h.



HVLP low-pressure technology – for even application with minimal material loss.



Maximum flow rate 700 ml/min depending on the liquid.



Easy cleaning thanks to screw caps on the machine.



Large paint container with a capacity of up to 1000 ml for long working times without refilling.



Rotary control for easy adjustment of air and paint volume.

+ INCLUDING

- 4x nozzles (1.5 / 2 / 2.5 / 3 mm)
- 1x 20 V / 2.0 Ah battery
- Viscosity measuring beaker
- 1x 2.4 A battery charger
- Cleaning needle



CORDLESS PAINT AND MORTAR STIRRER – SET

BC-PMX100-X – SET L

Part of the battery platform

20 V LIXES

ONE BATTERY FOR ALL DEVICES



BRUSHLESS

PRODUCT DATA

Dimensions L x W x H	306 (1100) x 180 x 185 mm
Engine type	Brushless motor
Battery voltage	20 V
Speed	650 rpm
Tool receiver	M14
Mixing shaft Ø	100 mm
Mixing shaft length	790 mm

LOGISTICAL DATA

	Single device	SET L
	Without battery / charger	1x 4.0 Ah battery 1x 2.4 A charger
Weight net / gross	2.5 / 3.2 kg	3 / 3.7 kg
Packaging dimensions	415 x 191 x 190 mm	415 x 191 x 190 mm
Item number	5907806900	5907806400
EAN	4046664245766	4046664279938
20 containers	1688 pcs.	1688 pcs.
40 containers	3500 pcs.	3500 pcs.
40 HQ containers	3938 pcs.	3938 pcs.

Ø 100 mm



790 mm



650 rpm



M14



SOFT
START



20 V



Running time when idle:

2.0 Ah

4.0 Ah



35 min

70 min

Specification per battery charge
Running time and performance may vary depending on external conditions.



Ergonomic, compact design with soft grip.



Soft start ensures that the machine starts up smoothly and without jerking.



Speed control in 6 stages with a maximum speed of 650 rpm for working in accordance with the material and application.



Quick-release fastener for tool-free attachment change.


UNIVERSAL APPLICATION



Mortar



Plaster

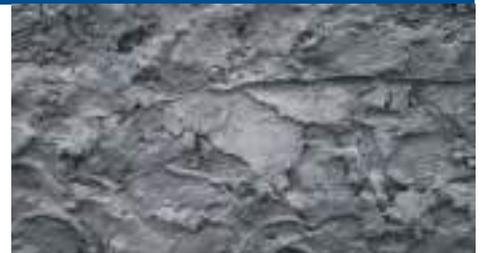

Concrete



Render



Adhesive



Paint

+ INCLUDING

- 1x 20 V / 4.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS ANGLE GRINDER – SET

C-AG125-X – SET L



PRODUCT DATA

Dimensions L x W x H	395 x 240 x 115 mm
Engine type	Brushless motor
Battery voltage	20 V
Idle speed	2500 – 10,000 rpm
Disc Ø	125 mm
Tool receiver	M14
Lock function	Spindle lock
Soft start	Yes
Anti-Kickback function	No
Overload protection	Yes

LOGISTICAL DATA

	Single device	SET L
	Without battery / charger	1x 4.0 Ah battery 1x 2.4 A charger
Weight net / gross	1.7 / 2.3 kg	2.6 / 3.4 kg
Packaging dimensions	410 x 175 x 115 mm	410 x 275 x 115 mm
Item number	5909234900	5909250400
EAN	4046664216476	4046664222637
20 containers	2680 pcs.	1646 pcs.
40 containers	5600 pcs.	3474 pcs.
40 HQ containers	2600 pcs.	4084 pcs.

Ø 125 mm

2500 – 10,000 rpm

SOFT START

Overload protection

20 V



UNIVERSAL APPLICATION



Cutting off



Sanding



Deburring



3-position front handle with non-slip soft grip.



Slim housing design with soft grip and aluminium front allows for working in tight spaces.



Speed adjustment from 2500 to 10,000 rpm in 6 steps via an adjustment wheel.



Storage compartment for the two-hole mounting key.



Easy tool change thanks to spindle lock.

Cutting performance: Round pipe \varnothing 12 mm

2.0 Ah

4.0 Ah



65 cuts

130 cuts

Specification per battery charge
Running time and performance may vary depending on external conditions.



Tool-free adjustable, burst-proof protective hood.

+ INCLUDING

- 1x cutting wheel (125 mm)
- Two-hole mounting key
- 3-position front handle
- 1x 20 V / 4.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS ANGLE GRINDER – SET

BC-AG125-X – SET S

Part of the battery platform

20 V LIXES
ONE BATTERY FOR ALL DEVICES



BRUSHLESS

PRODUCT DATA

Dimensions L x W x H	395 x 240 x 115 mm
Engine type	Brushless motor
Battery voltage	20 V
Idle speed	3000 – 10,000 rpm
Disc Ø	125 millimeters
Tool receiver	M14
Lock function	Spindle lock
Soft start	Yes
Anti-Kickback function	No
Overload protection	Yes

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	1.6 / 2.3 kg	approx. 1.5 / 2.3 kg
Packaging dimensions	410 x 175 x 115 mm	370 x 275 x 115 mm
Item number	5909235900	5909235400
EAN	4046664216575	4046664222316
20 containers	2880 pcs.	1200 pcs.
40 containers	6080 pcs.	2530 pcs.
40 HQ containers	7140 pcs.	2980 pcs.

Ø 125 mm



3000 – 10,000 rpm



SOFT START



Overload protection



20 V



UNIVERSAL APPLICATION



Cutting off



Sanding



Deburring

Cutting performance: Round pipe \varnothing 12 mm

2.0 Ah

4.0 Ah



95 cuts

190 cuts

Specification per battery charge
Running time and performance may vary depending on external conditions.



Ergonomic, slim design with rubberised handle and aluminium front for high operating comfort and working in tight spaces.



Easy tool change thanks to spindle lock.



6-stage speed setting – for working in accordance with the material and application.



3-position front handle with non-slip soft grip for added comfort and safety.



Tool-free adjustable, burst-proof protective cover enables quick changeover for different applications.

+ INCLUDING

- Protective hood
- Two-hole mounting key
- 3-position front handle
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS ANGLE GRINDER – SET

BC-AG125P-X – SET S



BRUSHLESS

PRODUCT DATA	
Dimensions L x W x H	325 x 75 x 120 mm
Engine type	Brushless motor
Battery voltage	20 V
Idle speed	7000 – 10,000 rpm
Disc Ø	125 mm
Tool receiver	M14
Lock function	Spindle lock
Soft start	Yes
Anti-Kickback function	Yes
Overload protection	Yes

LOGISTICAL DATA		
	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	1.9 / 2.3 kg	approx. 1.76 / 3.25 kg
Packaging dimensions	340 x 130 x 75 mm	370 x 325 x 120 mm
Item number	5909275900	5909275400
EAN	4046664287216	4046664302179
20 containers	6080 pcs	1656 pcs.
40 containers	12,500 pcs	3432 pcs.
40 HQ containers	12,500 pcs	4024 pcs.

Ø 125 mm



7000 – 10,000 rpm



SOFT START



Overload protection



20 V



UNIVERSAL APPLICATION



Cutting off



Sanding



Deburring



3-stage speed setting – for working in accordance with the material and application.



3-position front handle with non-slip soft grip for added comfort and safety.



Tool-free adjustable, burst-proof protective cover enables quick changeover for different applications.



Easy tool change thanks to spindle lock.



Ergonomic, slim design with rubberised handle and aluminium front for high operating comfort and working in tight spaces.

+ INCLUDING

- Protective hood
- Two-hole mounting key
- 3-position front handle
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger

CORDLESS JIGSAW – SET

C-JS220-X – SET S

Part of the battery platform

20 V LIXES
ONE BATTERY FOR ALL DEVICES



PRODUCT DATA

Dimensions L x W x H	240 x 220 x 75 mm
Engine type	Brush motor
Battery voltage	20 V
Stroke rate	0 – 2400 rpm
Stroke length	19 mm
Pendulum stroke levels	1–3 & fine cut setting
Inclination	-45° / -30° / -15° / 0° / +15° / +30° / +45°
Max. cut depth	100 mm (wood) 6 mm (metal) 8 mm (plastic)
Blower function	Yes
LED	Yes

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	1.5 / 1.9 kg	approx. 1.5 / 2.4 kg
Packaging dimensions	280 x 245 x 90 mm	275 x 245 x 83 mm
Item number	5901817900	5901817400
EAN	4046664217787	4046664222477
20 containers	3640 pcs.	tba
40 containers	7680 pcs.	tba
40 HQ containers	9040 pcs.	tba

100 mm (wood)
6 mm (metal)
8 mm (plastic)

-45° / -30° / -15° / 0° /
+15° / +30° / +45°

0 – 2400 rpm

145 mm

19 mm

20 V



Cutting performance: 19 mm chipboard

2.0 Ah

4.0 Ah



20 m

40 m

Specification per battery charge
Running time and performance may vary depending on external conditions.



7 adjustable cutting angles (-45°, -30°, -15°, 0°, +15°, +30°, +45°).



Quick sawing progress, thanks to pendulum stroke adjustable in 3 steps and fine-cut adjustment.



Sliding shoe prevents the workpiece being scratched, allowing processing of delicate surfaces.



Chip guard prevents chipping.



Practical parallel stop.



Quick-release chuck for easy saw blade replacement.



LED work light ensures perfect illumination even in poor lighting conditions.

UNIVERSAL APPLICATION



Aluminium



Wood



Plastic



Curved cuts

+ INCLUDING

- Parallel stop
- Allen key
- Connection for external dust extraction
- Suction adapter
- Chip guard incl. line guidance
- Protective hood
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS JIGSAW – SET

BC-JS254-X – SET S



BRUSHLESS

PRODUCT DATA	
Dimensions L x W x H	285 x 200 x 75 mm
Engine type	Brushless motor
Battery voltage	20 V
Stroke rate	1000 – 3000 rpm
Stroke length	25.4 millimeters
Pendulum stroke levels	1–3 & fine cut setting
Inclination	-45° / -22.5° / 0° / +22.5° / +45°
Max. cut depth	100 mm (wood) 10 mm (metal) 15 mm (plastic)
Blower function	Yes
LED	Yes

LOGISTICAL DATA		
	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	1.8 / 2.4 kg	approx. 2 / 2.9 kg
Packaging dimensions	310 x 240 x 80 mm	310 x 240 x 80 mm
Item number	5901818900	5901818400
EAN	4046664217794	4046664222507
20 containers	2840 pcs.	tba
40 containers	6000 pcs.	tba
40 HQ containers	7000 pcs.	tba

100 mm (wood)
10 mm (metal)
15 mm (plastic)

-45° / -22.5° / 0° /
+22.5° / +45°

1000 – 3000 rpm

152 mm

25.4 mm

20 V



Cutting performance: 19 mm chipboard

2.0 Ah

4.0 Ah



20 m

40 m

Specification per battery charge
Running time and performance may vary depending on external conditions.



6 speed level from 1,000 – 3,000 strokes per minute.



Quick sawing progress, thanks to pendulum stroke adjustable in 3 steps and fine-cut adjustment.



Sliding shoe prevents the workpiece being scratched, allowing processing of delicate surfaces.



Chip guard prevents chipping.



Practical parallel stop.



Quick-release chuck for easy saw blade replacement.




LED work light ensures perfect illumination even in poor lighting conditions.

UNIVERSAL APPLICATION



Aluminium



Wood



Plastic



Curved cuts

+ INCLUDING

- Parallel stop
- Allen key
- Connection for external dust extraction
- Suction adapter
- Chip guard incl. line guidance
- Protective hood
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS RECIPROCATING SAW – SET

C-RS100-X – SET S



PRODUCT DATA	
Dimensions L x W x H	370 x 75 x 180 mm
Engine type	Brush motor
Battery voltage	20 V
Stroke rate	0 – 2800 rpm
Stroke length	20 mm
Saw blade holder	1/2" (12.7 mm)
Saw blade length	150 mm
Cutting depth max.	115 mm (wood) 6 mm (low alloy steel, with suitable saw blade)
LED	Yes

LOGISTICAL DATA		
	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	1.7 / 2.2 kg	2.5 / 3.3 kg
Packaging dimensions	450 x 200 x 80 mm	470 x 270 x 96 mm
Item number	5909243900	5909243400
EAN	4046664217800	4046664222842
20 containers	2440 pcs.	1700 pcs.
40 containers	5140 pcs.	3580 pcs.
40 HQ containers	6060 pcs.	4200 pcs.

115 mm (wood)
6 mm
(low alloy steel)

150 mm

20 mm

0 – 2800 rpm

Tool-free
replacement

20 V



Cutting performance: Round timber Ø 30 mm

2.0 Ah

4.0 Ah



315 cuts

630 cuts

Specification per battery charge
Running time and performance may vary depending on external conditions.



Integrated LED work light with 10 seconds of extended lighting after switching off ensures optimum illumination of the cutting line.



Infinitely adjustable stroke rate from 0 to 2800 rpm and a stroke length of 20 mm.




Quick and tool-free saw blade change thanks to quick-release chuck.



Extendable footplate allows an adjustable cutting depth.

UNIVERSAL APPLICATION

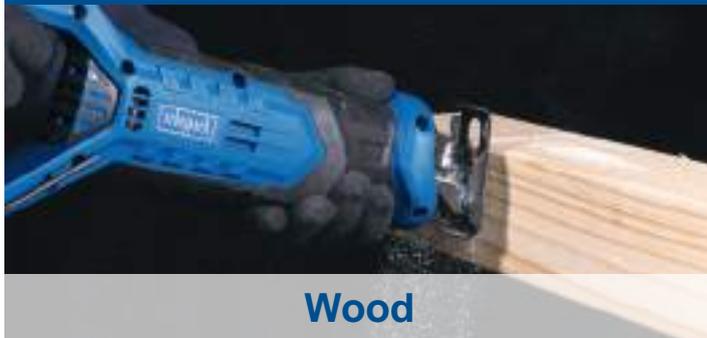

Wood



Metal



Plastic



Pallets

INCLUDING

- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS RECIPROCATING SAW – SET

BC-RS220-X – SET S

Part of the battery platform

20 V LIXES

ONE BATTERY FOR ALL DEVICES



PLUS X AWARD

2024 | Achieved for:

High Quality

Design

Ease of Use

Functionality

www.plusaward.com



BRUSHLESS

PRODUCT DATA

Dimensions L x W x H	390 x 80 x 160 mm
Engine type	Brushless motor
Battery voltage	20 V
Stroke rate	0 – 3000 rpm
Stroke length	22 mm
Saw blade holder	1/2" (12.7 mm)
Saw blade length	150 mm
Cutting depth max.	150 mm (wood) 15 mm (steel) 100 mm (metal pipe)
LED	Yes

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	1.6 / tba kg	1.6 / 2.8 kg
Packaging dimensions	tba	408 x 252 x 99 mm
Item number	5909272900	5909272401
EAN	4046664286547	4046664302124
20 containers	tba	2000 pcs.
40 containers	tba	4060 pcs.
40 HQ containers	tba	4736 pcs.

150 mm (wood)
15 mm (steel)
100 mm (metal pipe)

150 mm

22 mm

0 – 3000 rpm

Tool-free
replacement

20 V



UNIVERSAL APPLICATION



Wood



Metal



Plastic




Pallets



Quick and tool-free saw blade change thanks to quick-release chuck.



Tool-free extendable footplate for variable cutting depth.

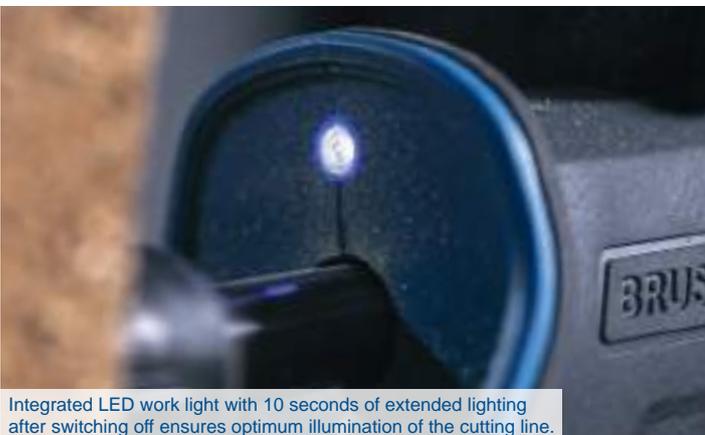

Integrated LED work light with 10 seconds of extended lighting after switching off ensures optimum illumination of the cutting line.



Infinitely adjustable stroke rate from 0 to 3000 rpm and a stroke length of 22 mm.

INCLUDING

- 1x saw blade for wood
- 1x saw blade for metal
- 1x 2.4 A battery charger
- 1x 20 V / 2.0 Ah battery



CORDLESS RECIPROCATING SAW – SET

BC-RS250-X – SET L



BRUSHLESS

PRODUCT DATA	
Dimensions L x W x H	390 x 80 x 160 mm
Engine type	Brushless motor
Battery voltage	20 V
Stroke rate	0 – 3000 rpm
Stroke length	28 mm
Saw blade holder	1/2" (12.7 mm)
Saw blade length	150 mm
Cutting depth max.	115 mm (wood) 20 mm (steel) 90 mm (PVC pipe)
LED	Yes

LOGISTICAL DATA		
	Single device	SET L
	Without battery / charger	1x 4.0 Ah battery 1x 2.4 A charger
Weight net / gross	1.8 / 2.3 kg	1.9 / tba kg
Packaging dimensions	460 x 180 x 90 mm	tba
Item number	5909242900	5909242401
EAN	4046664217824	4046664249184
20 containers	2440 pcs.	tba
40 containers	5140 pcs.	tba
40 HQ containers	6060 pcs.	tba

115 mm (wood)
20 mm (steel)
90 mm (PVC pipe)

150 mm

28 mm

0 – 3000 rpm

Tool-free
replacement

20 V



Cutting performance: Round timber Ø 30 mm

2.0 Ah


4.0 Ah



450 cuts

900 cuts

Specification per battery charge
Running time and performance may vary depending on external conditions.

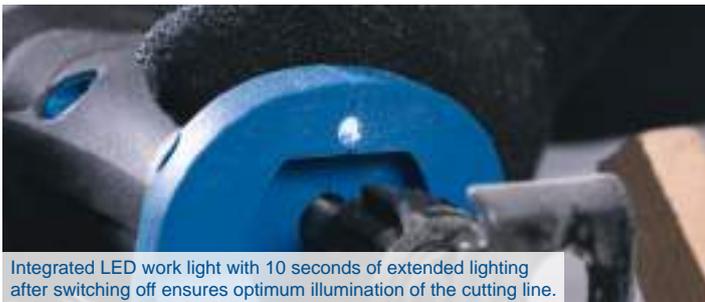

Integrated LED work light with 10 seconds of extended lighting after switching off ensures optimum illumination of the cutting line.



Infinitely adjustable stroke rate from 0 to 3000 rpm and a stroke length of 28 mm.



Quick and tool-free saw blade change thanks to quick-release chuck.



Tool-free extendable footplate for variable cutting depth.

UNIVERSAL APPLICATION



Wood



Metal



Plastic



Pallets

+ INCLUDING

- 1x saw blade for wood
- 1x saw blade for metal
- 1x 20 V / 4.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS RECIPROCATING SAW – SET

BC-RS280-X – SET S



BRUSHLESS

PRODUCT DATA	
Dimensions L x W x H	405 x 85 x 170 mm
Engine type	Brushless motor
Battery voltage	20 V
Stroke rate	0 – 3000 rpm
2-speed gearbox	1. Gear: 2300 rpm 2. Gear: 3000 rpm
Stroke length	28 mm
Saw blade holder	1/2" (12.7 mm)
Saw blade length	150 mm
Cutting depth max.	255 mm (wood) 20 mm (steel) 150 mm (metal pipe)
LED	Yes

LOGISTICAL DATA		
	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	1.8 / 2.2 kg	1.8 / 3.2 kg
Packaging dimensions	410 x 95 x 180 mm	410 x 100 x 250 mm
Item number	5909273900	5909273400
EAN	4046664286554	4046664287230
20 containers	1680 pcs.	2000 pcs.
40 containers	3360 pcs.	4060 pcs.
40 HQ containers	3840 pcs.	4736 pcs.

255 mm (wood)
20 mm (steel)
150 mm (metal pipe)

150 mm

28 mm

1. Gear: 2300 rpm
2. Gear: 3000 rpm

Tool-free
replacement

20 V



UNIVERSAL APPLICATION




INCLUDING

- 1x saw blade for wood
- 1x saw blade for metal
- 1x 2.4 A battery charger
- 1x 20 V / 2.0 Ah battery



CORDLESS PLUNGE SAW – SET

BC-PL60-X – SET L2

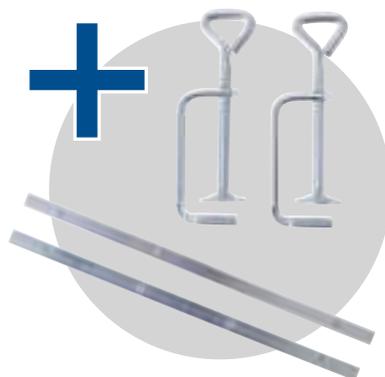

BRUSHLESS

PRODUCT DATA	
Dimensions L x W x H	335 x 220 x 245 mm
Engine type	Brushless motor
Battery voltage	20 V / 40 V
Saw blade specifications	165 x 20 x 1.1 x 1.6 mm, 48 T
Saw blade speed	3000 – 6300 rpm
Max. cutting depth 90°	61 mm
Max. cutting depth 45°	45 mm
Tilt angle	0° – 48°
Recess joint	Yes
LED	No
Cutting line display	No

LOGISTICAL DATA		
	Single device	SET L2
	Without battery / charger	2x 4.0 Ah battery 1x 2.4 A twincharger
Weight net / gross	7.6 / 9.0 kg	10 / 11.6 kg
Packaging dimensions	710 x 248 x 253 mm	710 x 248 x 253 mm
Item number	5901821900	5901821400
EAN	4046664235996	4046664267997
20 containers	1800 pcs.	1800 pcs.
40 containers	3660 pcs.	3660 pcs.
40 HQ containers	4500 pcs.	4500 pcs.

61 mm



45 mm



165 x 20 x 1.4 x 1.8 mm,
48 T



2x 700 mm



3000 – 6300 rpm



SOFT
START





Adjustable cutting angle from 0° to 48°.

Cutting performance: 15 mm chipboard	
2x 2.0 Ah	2x 4.0 Ah
	
33 m	66 m
Specification per battery charge Running time and performance may vary depending on external conditions.	



Powerful cordless plunge saw for precise cuts in sheet material, solid wood, laminate, and for cutting shadow gaps or cut-outs in worktops.



Guide rails (2 x 700 mm) enable precise cutting of the workpiece.



Saw blade 165 x 20 mm, 48 teeth.



Low-dust working thanks to extraction nozzle.



Flexible use with 1x 20 V batteries or 2x 20 V (40 V) batteries.



Cutting depth at 90°: 61 mm; cutting depth at 45°: 45 mm.

20 V / 40 V



+ INCLUDING

- 2x 700 mm guide rail
- 2x rail connectors
- 2x screw clamps
- 1x anti-tip device
- 2x 20 V / 4.0 Ah battery
- 1x 2.4 A twincharger



CORDLESS HAND-HELD CIRCULAR SAW – SET

C-HCS165-X – SET S

Part of the battery platform

20 V LIXES

ONE BATTERY FOR ALL DEVICES



PRODUCT DATA

Dimensions L x W x H	295 x 180 x 200 mm
Engine type	Brush motor
Battery voltage	20 V
Saw blade specifications	165 x 20 x 1.2 x 1.8 mm, 24 T
Saw blade speed	4300 rpm
Max. cutting depth 90°	53 mm
Max. cutting depth 45°	39 mm
Tilt angle	0 – 45°
LED	Yes
Cutting line display	Yes

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	2.5 / 3.0 kg	tba
Packaging dimensions	310 x 218 x 192 mm	tba
Item number	5901815900	5901815400
EAN	4046664216834	4046664222606
20 containers	1670 pcs.	tba
40 containers	3520 pcs.	tba
40 HQ containers	4140 pcs.	tba

90° = 53 mm


45° = 39 mm

165 x 20 x 1.2 x 1.8 mm,
24 T

4300 rpm

20 V



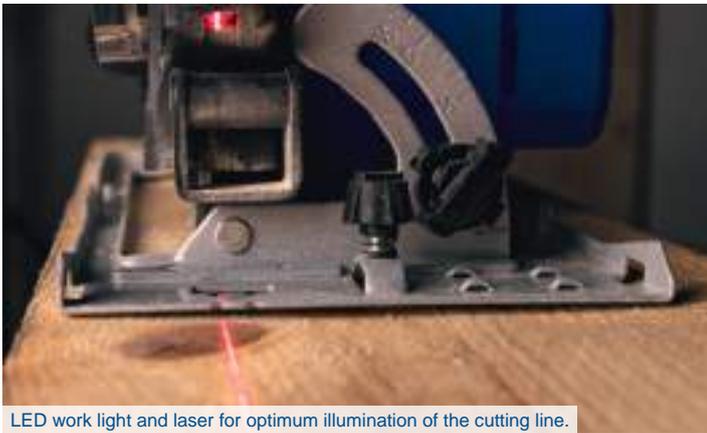

LED work light and laser for optimum illumination of the cutting line.

**Cutting performance:
15 mm wood-based panel**

2.0 Ah	4.0 Ah
	
32 mm	64 mm

Specification per battery charge
Running time and performance may vary depending on external conditions.



Swing guard with retraction lever provides greater safety during sawing.



Parallel stop enables particularly precise cuts.



Saw head can be tilted from 0 to 45° with continuously adjustable cutting depth from 0 to 53 mm.



Ergonomic and compact design with soft-grip surface.



Spindle lock enables easy saw blade replacement.

02/2026 Technical modifications and errors reserved.

LED & Laser



+ INCLUDING

- Saw blade
- Allen key
- Parallel stop
- Connection for external dust extraction
- Suction adapter
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS HAND-HELD CIRCULAR SAW – SET

BC-HCS165-X – SET S

Part of the battery platform

20 V LIXES
ONE BATTERY FOR ALL DEVICES



Click here for
optional accessories



BRUSHLESS

PRODUCT DATA	
Dimensions L x W x H	295 x 180 x 195 mm
Engine type	Brushless motor
Battery voltage	20 V
Saw blade specifications	165 x 20 x 1 x 1.6 mm, 24 T
Saw blade speed	4500 rpm
Max. cutting depth 90°	55 mm
Max. cutting depth 45°	40 mm
Tilt angle	0 – 45°
LED	Yes
Cutting line display	No

LOGISTICAL DATA		
	Single device	SET S
	Without battery / charger	1x 20 V / 2.0 Ah battery 1x 2.4 A battery charger
Weight net / gross	2.7 / 3.6 kg	tba
Packaging dimensions	320 x 200 x 195 mm	tba
Item number	5901816900	5901815400
EAN	4046664216841	4046664222606
20 containers	1600 pcs.	tba
40 containers	3380 pcs.	tba
40 HQ containers	3970 pcs.	tba

90° = 55 mm

45° = 40 mm

165 x 20 x 1 x 1.6 mm,
24 T

4500 rpm

20 V



SOFT
START





LED work light with 10 seconds of extended lighting after switching off ensures optimum illumination of the cutting line.

**Cutting performance:
19 mm chipboard**

2.0 Ah


4.0 Ah



42 mm

84 mm

Specification per battery charge
Running time and performance may vary depending on external conditions.

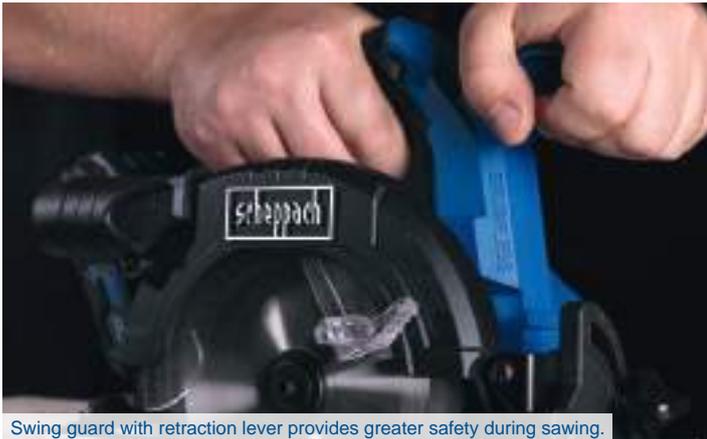


Swing guard with retraction lever provides greater safety during sawing.



Parallel stop enables particularly precise cuts.



Saw head can be tilted from 0 to 45° with continuously adjustable cutting depth from 0 to 55 mm.

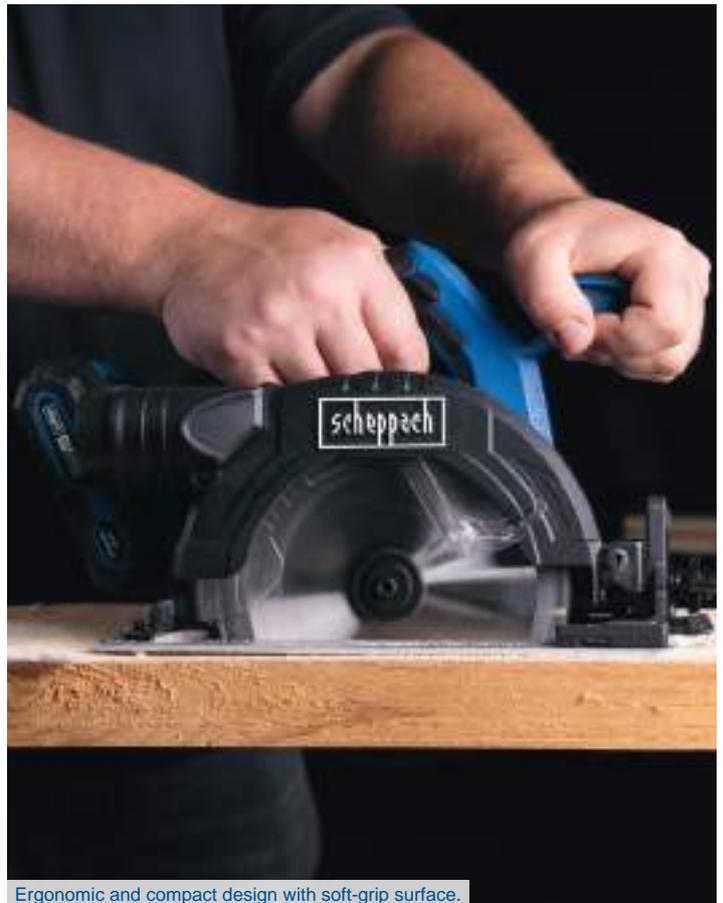

Ergonomic and compact design with soft-grip surface.



Spindle lock enables easy saw blade replacement.

LED



INCLUDING

- Saw blade
- Allen key
- Parallel stop
- Connection for external dust extraction

- Suction adapter
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS METAL BAND SAW – SET

C-MBS635-X – SET S



PRODUCT DATA

Dimensions L x W x H	342 x 245 x 170 mm
Engine type	Brush motor
Battery voltage	20 V
Max. cutting width/height	63.5 mm
Saw band length	733 mm
Saw band width	12.7 mm
Belt speed	1.4 – 2.7 m/s
LED	Yes


LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	3 / 3.9 kg	3.8 / 4.7 kg
Packaging dimensions	355 x 258 x 192 mm	355 x 258 x 192 mm
Item number	5901516900	5901516400
EAN	4046664245759	4046664269373
20 containers	920 pcs.	920 pcs.
40 containers	1840 pcs.	1840 pcs.
40 HQ containers	2236 pcs.	2236 pcs.


63.5 mm



733 x 12.7 x 0.4 mm



1.4 – 2.7 m/s



SOFT START



Overload protection



20 V



Cutting performance:
Square tube 30 x 30 x 2 mm

2.0 Ah

4.0 Ah



60 pcs.

120 pcs.

Specification per battery charge
 Running time and performance may vary depending on external conditions.



Suitable for right and left-handed users thanks to the handle that can be mounted on either side.




LED light for optimum illumination of the cutting area.



Quick clamp lever for tool-free loosening of the saw blade.



6-stage speed adjustment from 330 to 630 rpm with variable sawing speed from 1.4 to 2.7 m/s.

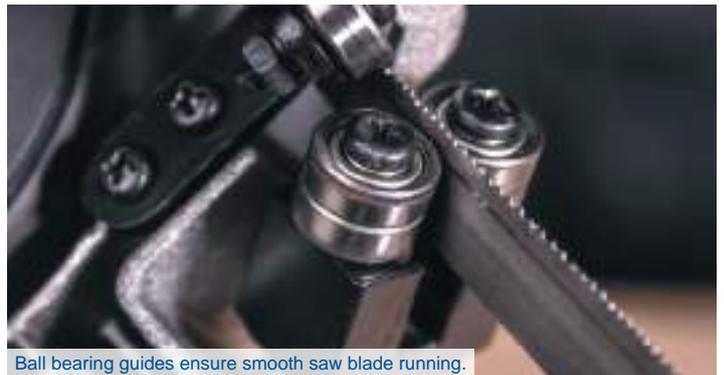

Ball bearing guides ensure smooth saw blade running.

UNIVERSAL APPLICATION



Aluminium




Plastic




Stainless steel



Copper

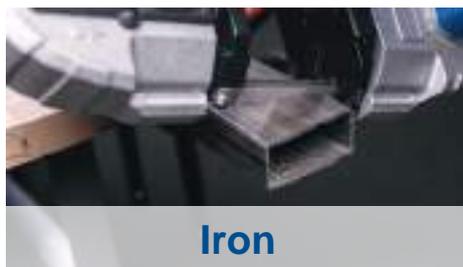

Iron

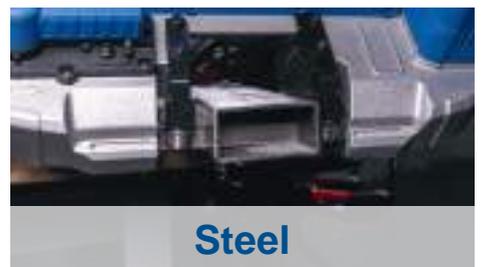

Steel

+ INCLUDING

- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS SLIDING CROSS-CUT MITRE SAW – SET

BC-HM216-X – SET L

Part of the battery platform

20 V LIXES
ONE BATTERY FOR ALL DEVICES

Click here for
optional accessories



BRUSHLESS

PRODUCT DATA

Dimensions L x W x H	735 x 520 x 325 mm
Engine type	Brushless motor
Battery voltage	20 V
Saw blade specifications	210 x 30 x 2.0 mm / 24 teeth
Saw blade speed	4200 rpm
Max. cutting width/height 90° / 90°	65 mm
Max. cutting width/height 90° / 45°	38 mm
Max. cutting width/height 45° / 90°	340 mm
Max. cutting width/height 45° / 45°	240 mm
Special cutting height	No
Tilt angle	0 to 45°
Mitre angle:	45° to -45°
Grid position on the turntable at	0° / 10° / 15° / 22.5° / 31.6° / 40° / 45°
Soft start	No
Cutting line display	LED shadow light

LOGISTICAL DATA

	Single device	SET L
	Without battery / charger	1x 4.0 Ah battery 1x 2.4 A charger
Weight net / gross	10.76 / 12.98 kg	11.7 / 14.6 kg
Packaging dimensions	760 x 460 x 365 mm	760 x 460 x 365 mm
Item number	5901228900	5901228400
EAN	4046664233886	4046664302117
20 containers	228 pcs.	228 pcs.
40 containers	468 pcs.	468 pcs.
40 HQ containers	546 pcs.	546 pcs.

65 mm

340 mm

210 x 30 x 2.0 mm
24 teeth

LED shadow light

20 V



UNIVERSAL APPLICATION



Laminate



Wooden beam




Wooden boards



Base boards



Angle cuts

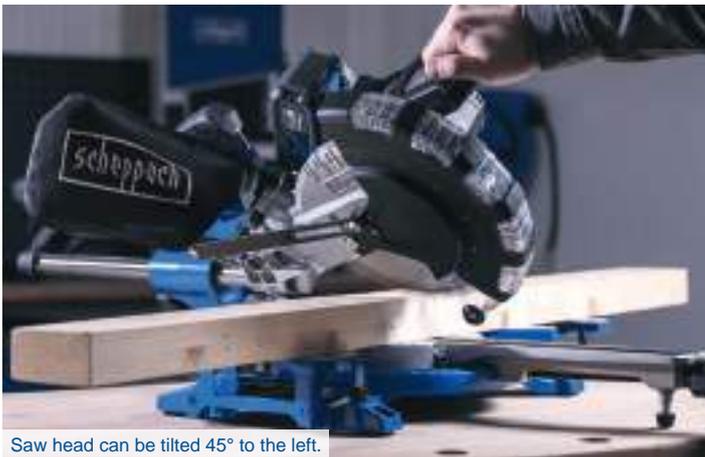


Saw head can be tilted 45° to the left.



Mitre angle adjustable to the left and right in the range from 45° to -45°.



Compact design for high mobility and flexible application options.

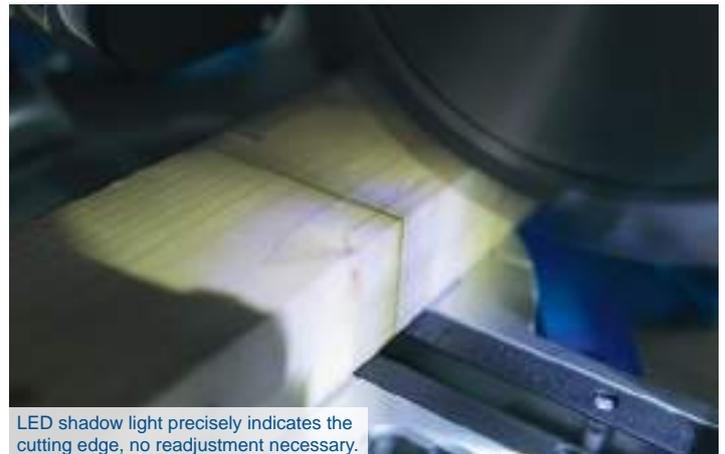

LED shadow light precisely indicates the cutting edge, no readjustment necessary.



Support surfaces on both sides assist when working with long materials.



Double column guide for precise sawing results.

INCLUDING

- Workpiece stop
- Dust collection bag
- 1x 20 V / 4.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS MULTIFUNCTIONAL TOOL – SET

C-MT40-X – SET S


Part of the battery platform

20 V LIXES
ONE BATTERY FOR ALL DEVICES

Click here for
optional accessories

4 in 1

- Cutting
- Sawing
- Shaving
- Sanding

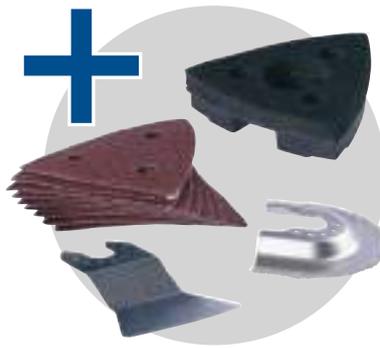

PRODUCT DATA

Dimensions L x W x H	270 x 70 x 105 mm
Engine type	Brush motor
Battery voltage	20 V
Oscillation speed	10,000 - 40,000 rpm
Oscillation angle	3.2°
Soft start	Yes
LED	Yes

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 20 V / 2.0 Ah battery 1x 2.4 A battery charger
Weight net / gross	1.0 / 1.4 kg	1.0 / 2.7 kg
Packaging dimensions	297 x 175 x 107 mm	340 x 310 x 120 mm
Item number	5909248900	5909248400
EAN	4046664218074	4046664222804
20 containers	2352 pcs.	2400 pcs.
40 containers	4700 pcs.	4800 pcs.
40 HQ containers	5376 pcs.	4929 pcs.

3.2°



10,000 - 40,000 rpm



SOFT
START



20 V



UNIVERSAL APPLICATION



Cutting



Sawing



Shaving



Sanding



Attachments can be mounted in various working directions – ideal adaptation to the respective working conditions, even hard-to-reach areas can be easily accessed.



LED workpiece illumination with 10 seconds extended illumination time.



Oscillation speed adjustable in 6 stages from 10,000 to 40,000 rpm.



Adapter for external dust extraction enables low-dust working.



Tool-free accessory change via practical quick clamp lever.




+ INCLUDING

- 1x HCS plunge cut saw blade
- 1x diamond saw blade
- 1x shaving blade
- 1x Delta grinding plate
- 1x adapter for external dust extraction
- 9x sanding sheets for wood
- 1x angle adapter
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS ORBITAL SANDER – SET

C-OBS125-X – SET S

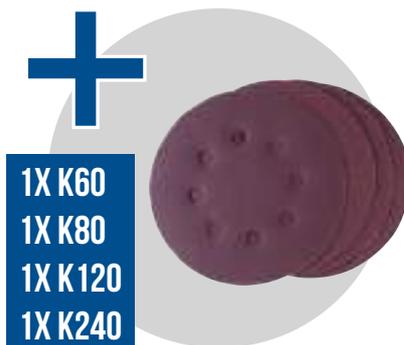

PRODUCT DATA	
Dimensions L x W x H	125 x 185 x 170 mm
Engine type	Brush motor
Battery voltage	20 V
Idle speed	3000 – 12,000 rpm
Oscillation rate	6000 – 24,000 rpm
Grinding wheel Ø	125 mm
Resonant circuit	2 mm
Soft start	Yes

LOGISTICAL DATA		
	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	1 / 1.1 kg	approx. 0.9 / 2.2 kg
Packaging dimensions	150 x 130 x 175 mm	150 x 130 x 175 mm
Item number	5909240900	5909240400
EAN	4046664216810	4046664242765
20 containers	6152 pcs.	3600 pcs.
40 containers	12928 pcs.	7200 pcs.
40 HQ containers	14112 pcs.	/

Ø 125 mm

2 mm resonant circuit

6000 – 24,000 rpm

SOFT START

Velcro fastener

20 V



Running time when idle:

2.0 Ah

4.0 Ah



25 min

50 min

Specification per battery charge
Running time and performance may vary depending on external conditions.



Low overall height facilitates particularly precise grinding close to the edge.



Easy sanding sheet change thanks to velcro fastener.



Adjustable oscillation rate from 14,000 to 24,000 rpm with a resonant circuit of 1.6 mm for application-specific work, 6 speeds adjustable via a control dial.



Dust-proof switch for protection against dust ingress and a long service life.



Low-dust work thanks to dust extraction with dust bag or via a chip extraction system.

+ INCLUDING

- 4x sanding sheets (K60, K80, K120, K240)
- Suction adapter
- Dust bag
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS ORBITAL SANDER

C-OBS125/2-X

Part of the battery platform

20 V LIXES

ONE BATTERY FOR ALL DEVICES

Click here for
optional accessories



Battery and battery charger available separately

PRODUCT DATA

Dimensions L x W x H	145 x 125 x 140 mm
Engine type	Brush motor
Battery voltage	20 V
Idle speed	7000 – 12,000 rpm
Oscillation rate	14,000 – 24,000 rpm
Grinding wheel Ø	125 mm
Resonant circuit	1.6 mm
Soft start	Yes

LOGISTICAL DATA

Weight net / gross	0.9 / 1.2 kg
Packaging dimensions	190 x 130 x 140 mm
Item number	5909271900
EAN	4046664286516
20 containers	4212 pcs.
40 containers	9396 pcs.
40 HQ containers	10584 pcs.

Ø 125 mm



1.6 mm
resonant circuit



14,000 – 24,000 rpm



SOFT
START



Velcro fastener



20 V






Low overall height facilitates particularly precise grinding close to the edge.



Low-dust work thanks to dust extraction with dust bag or via a chip extraction system.

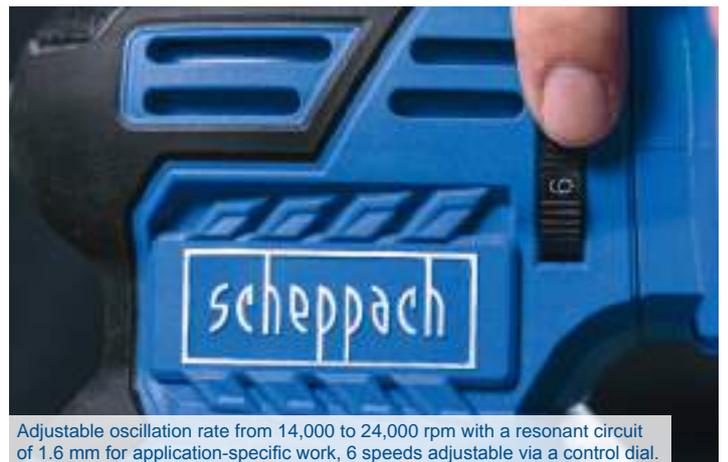

Adjustable oscillation rate from 14,000 to 24,000 rpm with a resonant circuit of 1.6 mm for application-specific work, 6 speeds adjustable via a control dial.



Dust-proof switch for protection against dust ingress and a long service life.



Easy sanding sheet change thanks to velcro fastener.

+ INCLUDING

- 1x sanding sheet (K120)
- Suction adapter
- Dust bag



CORDLESS 3-IN 1 MULTIFUNCTION SANDER – SET

C-MSA3/1-X – SET S

Part of the battery platform
20 V LIXES
 ONE BATTERY FOR ALL DEVICES




PRODUCT DATA	
Dimensions L x W x H	123 x 123 x 123 mm
Engine type	Brush motor
Battery voltage	20 V
Idle speed	7000 – 12,000 rpm
Oscillation rate	14,000 – 24,000 rpm
Random orbital sander Ø	125 mm
Delta sander	150 x 100 mm
Orbital sheet sander	184 x 92 mm
Resonant circuit	1.6 mm
Soft start	Yes

	LOGISTICAL DATA	
	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	1 / 1.3 kg	approx. 1 / 2.55 kg
Packaging dimensions	220 x 105 x 160 mm	250 x 185 x 160 mm
Item number	5903826900	5903826400
EAN	4046664287605	4046664302193
20 containers	2640 pcs	2640 pcs
40 containers	5280 pcs	5280 pcs
40 HQ containers	6720 pcs	6270 pcs

3in1

Ø 125 mm
 (random orbital sander)
 150 x 100 mm (delta sander)
 184 x 92 mm (orbital sheet sander)



1.6 mm resonant circuit



14,000 – 24,000 rpm



SOFT START



20 V



UNIVERSAL APPLICATION



Random orbital sander



Delta sander



Orbital sheet sander



Easy sanding sheet change thanks to velcro fastener.



Dust-proof switch for protection against dust ingress and a long service life.



Variable oscillation frequency control from 14,000 to 24,000 rpm with a resonant circuit of 1.6 mm for application-specific work, adjustable via a control dial.



3-in-1 function thanks to interchangeable grinding wheels: Random orbital sander (Ø 125 mm), delta sander (150 x 150 x 100 mm), or orbital sheet sander (184 x 92 mm).



Low-dust work thanks to dust extraction with dust bag or via a chip extraction system.



Low overall height facilitates particularly precise grinding close to the edge.

+ INCLUDING

- 1 x random orbital sander
- 1 x delta sander
- 1 x orbital sheet sander K120
- Dust bag
- Suction adapter
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS BELT SANDER – SET

BC-BES533-X – SET S

Part of the battery platform

20 V LIXES

ONE BATTERY FOR ALL DEVICES



BRUSHLESS

PRODUCT DATA

Dimensions L x W x H	340 x 150 x 150 mm
Engine type	Brushless motor
Battery voltage	20 V
Belt speed	120 – 380 m/min
Grinding belt length/width	75 x 130 mm

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	2.2 / 2.6 kg	2.2 / 3.3 kg
Packaging dimensions	370 x 165 x 170 mm	440 x 160 x 200 mm
Item number	5903314900	5903314400
EAN	4046664290506	4046664302209
20 containers	2300 pcs.	1600 pcs.
40 containers	4800 pcs.	3400 pcs.
40 HQ containers	5700 pcs.	4080 pcs.

75 x 130 mm



120 – 380 m/min



Grinding belt replacement without tools



20 V






Adjustment to the requirements of various surfaces through variable speed control.



Adjustable additional handle for maximum flexibility.

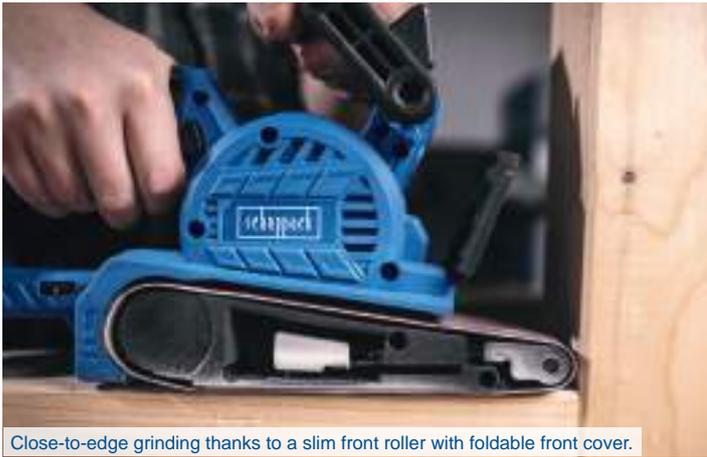

Close-to-edge grinding thanks to a slim front roller with foldable front cover.



Uncomplicated grinding belt replacement thanks to a quick clamping system.



The grinding belt is easy to adjust.



Dust chip extraction via a collection back or extraction system enables low-dust working.



Ergonomic handles with soft grip optimised for left- and right-handed people.

UNIVERSAL APPLICATION



Wood



Plastic



Metal

INCLUDING

- 1x grinding belt P80
- 1 x dust collector
- 1 x suction adapter
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS ROUTER – SET

BC-EHR24-X – SET S

Part of the battery platform

20 V LIXES
ONE BATTERY FOR ALL DEVICES

3in1

- Router
- Edge router
- Angle router



BRUSHLESS


PRODUCT DATA


Dimensions L x W x H	210 x 120 x 230 mm
Engine type	Brushless motor
Battery voltage	20 V
Idle speed	6 stages, max. 10,000 – 30,000 rpm
Retainer	8 mm
Cutting depth	35 mm
Tool changes	Spindle locking
LED	Yes

LOGISTICAL DATA


	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	1.6 / 2.9 kg	1.6 / 4.2 kg
Packaging dimensions	240 x 214 x 206 mm	306 x 214 x 240 mm
Item number	5902706900	5902706400
EAN	4046664290490	4046664302353
20 containers	2100 pcs.	1500 pcs.
40 containers	4700 pcs.	3300 pcs.
40 HQ containers	5200 pcs.	3700 pcs.

3in1



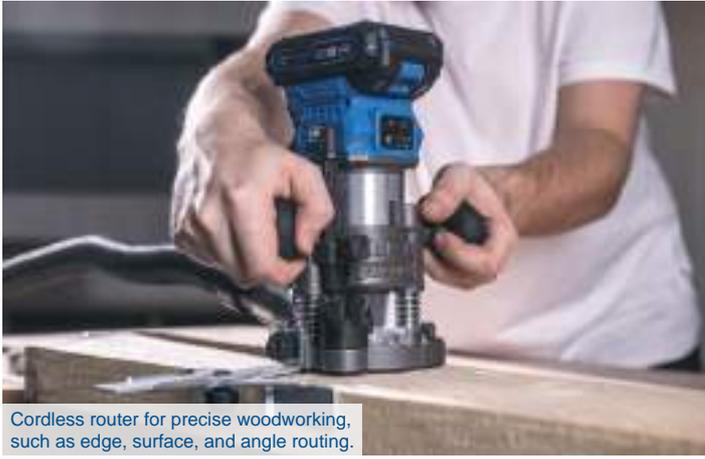

Cordless router for precise woodworking, such as edge, surface, and angle routing.

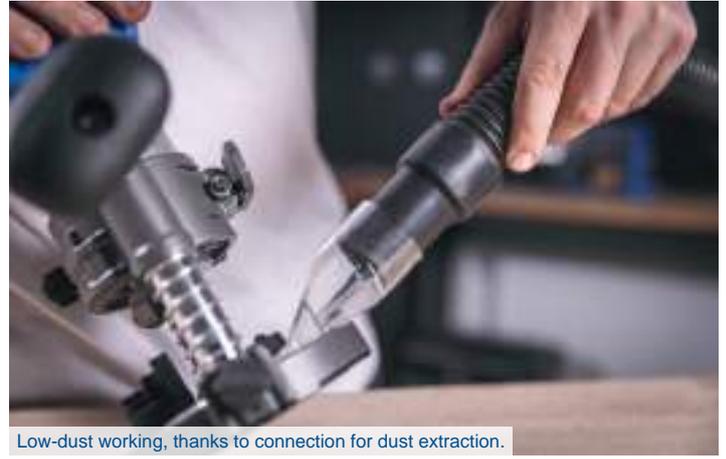

Low-dust working, thanks to connection for dust extraction.



Maximum routing depth of 35 mm.



Easy tool replacement, thanks to the integrated spindle lock.



Integrated LED work light for optimum illumination of the work area, even in poor lighting conditions.



Speed adjustable in 6 stages via the control panel from 10,000 – 30,000 rpm for optimal adjustment to every application.

UNIVERSAL USE



Router



Edge router



Angle router

+ INCLUDING

- 2x extraction ports
- 1x parallel stop
- 1x assembly tool
- 3x router modules (edge, plunge and angle router module)
- 1x suction adapter
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS PLANER – SET

BC-PLM82-X – SET S

Part of the battery platform

20 V LIXES
ONE BATTERY FOR ALL DEVICES



BRUSHLESS

PRODUCT DATA

Dimensions L x W x H	290 x 150 x 180 mm
Engine type	Brushless motor
Battery voltage	20 V
Planer shaft speed	15,000 rpm
Planing width	82 mm
Max. chip take-off	2 mm
Max. rebate depth	17 mm

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	2.1 / 2.6 kg	2.1 / 3.9 kg
Packaging dimensions	300 x 150 x 200 mm	400 x 150 x 210 mm
Item number	5909289900	5909289400
EAN	4046664290186	4046664302216
20 containers	2300 pcs.	1800 pcs.
40 containers	4800 pcs.	3700 pcs.
40 HQ containers	5700 pcs.	4500 pcs.

82 mm



2 mm



15,000 rpm



20 V





Powerful cordless planer for planing flat surfaces and milling edges using integrated V-grooves.



2x replaceable, double-sided HSS planer blades.



Maximum planing width of 82 mm, maximum chip removal 2 mm, maximum rebate depth 17 mm



Precise planing thanks to adjustable cutting depth control via a setting wheel with an integrated scale.



Spring-loaded parking rest to protect the planer and the work surface from damage caused by coasting blades.



Dual-sided chip ejection with connection option for dust extraction.



Ergonomic design with a soft-grip handle ensures comfortable use, even during extended use.

+ INCLUDING

- 1x parallel stop
- 1x parallel stop bracket
- 1x rebate depth stop
- 1x Allen key
- 2x HSS planer blades
- 1x open-ended spanner
- 1x dust bag
- 1x suction adapter
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS HAND-HELD COMPRESSOR – SET

C-AC20-X – SET S



PRODUCT DATA	
Dimensions L x W x H	220 x 70 x 160 mm
Engine type	Brush motor
Battery voltage	20 V
Max. working pressure	7 bar
Max. air flow	15 L/min
Digital pressure gauge	Yes
LED	Yes
Sound power level (LwA)	86.2 db(A)

	LOGISTICAL DATA	
	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	0.6 / 0.8 kg	approx. 0.6 / 2 kg
Packaging dimensions	215 x 245 x 80 mm	405 x 275 x 95 mm
Item number	5909247900	5909247400
EAN	4046664218593	4046664244264
20 containers	4400 pcs.	tba
40 containers	9300 pcs.	tba
40 HQ containers	10950 pcs.	tba

Max. 7 bar



Auto shut-off



LED



20 V



Running time when idle:

2.0 Ah

4.0 Ah



50 min

100 min

Specification per battery charge
Running time and performance may vary depending on external conditions.



Compact, ergonomic design with soft-grip handle for high operator comfort.



Practical storage of the compressed air hose.




Auto shut-off when the preset pressure is reached.

LCD display shows the current as well as the pre-set operating pressure either in bar or PSI.



The LED light allows work even in adverse lighting conditions.

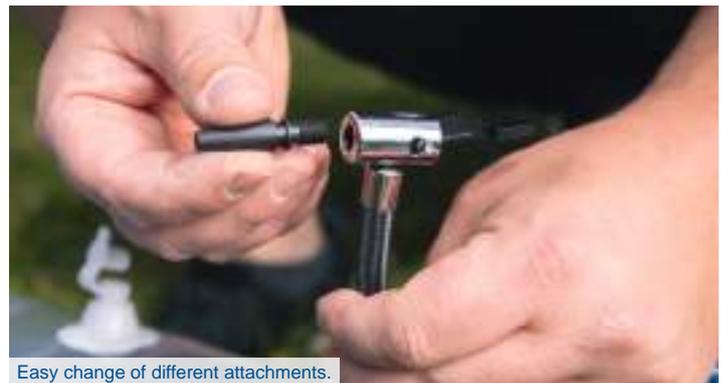


Easy change of different attachments.

UNIVERSAL APPLICATION



Bicycle tyres

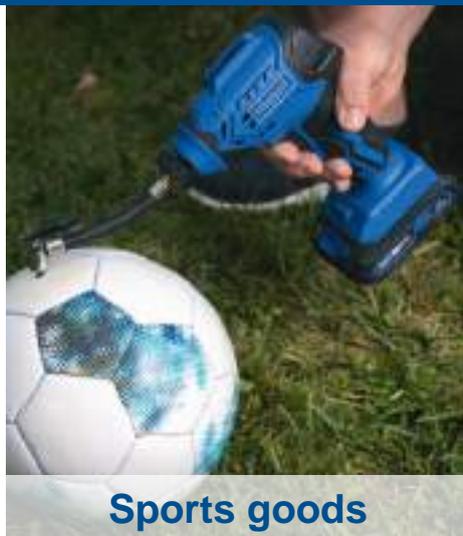

Sports goods



Air mattress

+ INCLUDING

- 1x compressed air hose
- 1x ball needle
- 2x universal valve adapters,
- 1x valve adapter for Dunlop/Blitz valves
- 1x Valve adapter for Sclaverand valves
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



HYBRID COMPRESSOR – SET

AIRFORCE 6 – SET S

Part of the battery platform
20 V LIXES
 ONE BATTERY FOR ALL DEVICES



PRODUCT DATA

Dimensions L x W x H	292 x 147 x 212 mm
Engine type	Brush motor
Battery voltage	20 V
Max. working pressure	10.3 bar
Blower air flow rate	380 l/min
Compressor air flow rate	21 l/min
AC cable length	1.8 m
DC cable length	3 m
Charging options	USB-A / 5V/2A, USB-C / 5V/2A
Hose length	High-pressure hose 75 cm Blower hose 44 cm
LED	Yes

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	2.3 / 2.5 kg	2,6 / 17 kg
Packaging dimensions	365 x 153 x 223 mm	400 x 155 x 212 mm
Item number	5906159901	5906159401
EAN	4046664216803	4046664226468
20 containers	2430 pcs.	1728 pcs.
40 containers	5130 pcs.	3564 pcs.
40 HQ containers	5700 pcs.	3960 pcs.

10.3 bar



Blower 380 L/min
Compressor 21 L/min



Auto shut-off



LED



20 V



HYBRID FUNCTION



230 V power cable



20 V rechargeable battery



12 V



Storage compartment for valve adapter, ball needle, conical adapter.



Integrated storage space for 230 V and 12 V cable, 75 cm compressed air hose and 44 cm air-release/high-volume/low-pressure hose



Digital display shows the measured and pre-set pressure. Auto shut-off when the preset pressure is reached.



The LED light allows work even in adverse lighting conditions.

UNIVERSAL APPLICATION



Balls



Air mattress



Bicycle tyres



Car tyres

+ INCLUDING

- Valve adapter
- Ball needle
- Conical adapter (swimming accessories)
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS COMPRESSOR – SET

C-ACT 160/6-X – SET S2

Part of the battery platform
20 V LIXES
 ONE BATTERY FOR ALL DEVICES



PRODUCT DATA

Dimensions L x W x H	410 x 333 x 325 mm
Engine type	Brush motor
Battery voltage	2x 20 V
Max. working pressure	8 bar
Suction capability	130 L/min
Boiler size	6 L
Number of cylinders	1 pcs.
Quick coupling	1 pcs.
Design	Oil-free
Sound power level (LwA)	96 dB (A)

LOGISTICAL DATA

	Single device	SET S2
	Without battery / charger	2x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	10 / 12 kg	11 / 13.5 kg
Packaging dimensions	440 x 365 x 375 mm	440 x 365 x 375 mm
Item number	5906175900	5906175400
EAN	4046664247241	4046664270799
20 containers	504 pcs.	504 pcs.
40 containers	1032 pcs.	1032 pcs.
40 HQ containers	1169 pcs.	1204 pcs.

8 bar

130 L/min

6 L

2x pressure gauges
1x quick coupling

Oil-free

2x 20 V



Running time when idle:

2.0 Ah

4.0 Ah



12 min

24 min

Specification per battery charge
Running time and performance may vary depending on external conditions.



Vibration-dampened rubber feet for non-slip placement and quiet, low-vibration operation.



Handle for easy transport.




Pressure reducer and 2 pressure gauges for optimum control of the working pressure.



Easy change of different attachments.

UNIVERSAL APPLICATION

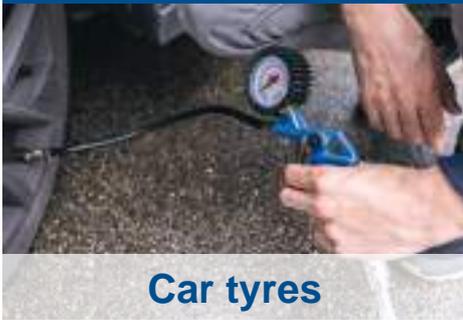

Car tyres



Bicycle tyres



Blowing out



Nailing / tacking



Sports goods



Air mattress

*Not included in the scope of delivery

+ INCLUDING

- 11-piece accessories set
- 2.5 m fabric hose
- 2x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS HAND-HELD VACUUM CLEANER – SET

C-HVC150-X – SET S



2in1

- Hand-held vacuum cleaner
- Vacuum cleaner

Part of the battery platform

20 V LIXES

ONE BATTERY FOR ALL DEVICES



PRODUCT DATA

Dimensions L x W x H	415 x 115 x 135 mm
Engine type	Brush motor
Battery voltage	20 V
Max. suction power	10 kPa
Container volume	560 ml
Suction levels	1
Air flow	15 L/s
Cyclone technology	Yes

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	1.4 / 1.8 kg	2.2 / 2.6 kg
Packaging dimensions	430 x 190 x 150 mm	430 x 190 x 150 mm
Item number	5909251900	5909251400
EAN	4046664234371	4046664268444
20 containers	2130 pcs.	2130 pcs.
40 containers	4320 pcs.	4320 pcs.
40 HQ containers	4920 pcs.	4920 pcs.



560 ml



Cyclone technology



20 V



Running time when idle:

2.0 Ah

4.0 Ah




16 min

32 min

Specification per battery charge
Running time and performance may vary depending on external conditions.



Filter cleaning also possible under running water.

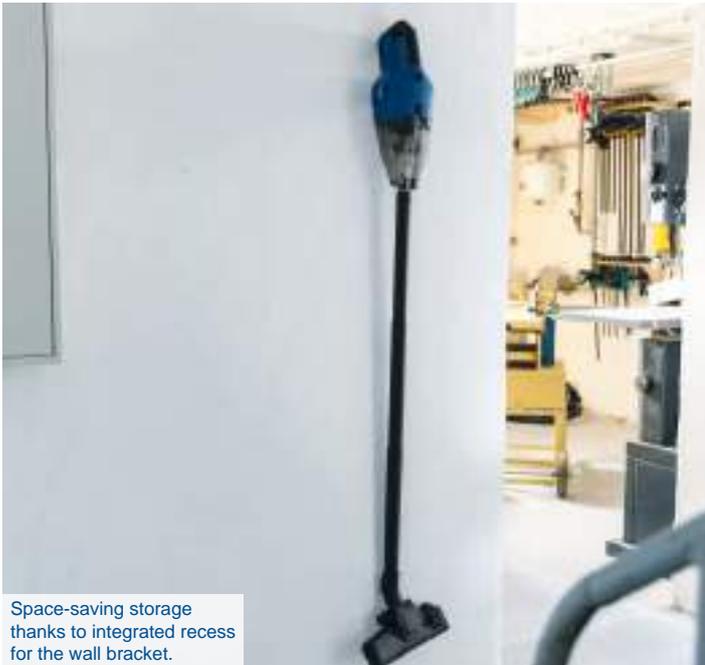

Space-saving storage thanks to integrated recess for the wall bracket.




Easy switching between smooth floors and carpets.



560 ml dust container, easy to empty.


UNIVERSAL APPLICATION

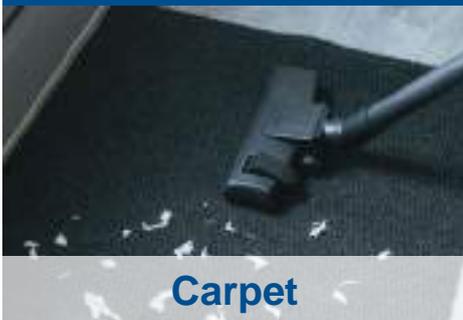

Carpet



Dry vacuuming

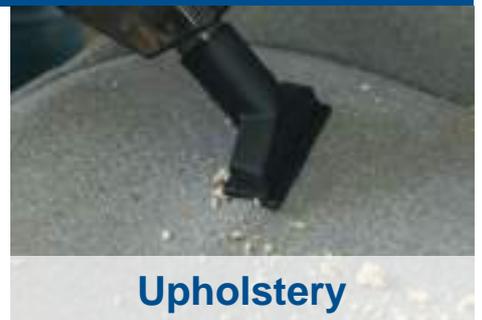

Upholstery



Auto



High ceilings



Textiles

+ INCLUDING

- 3x plastic extension tubes
- 1x joint nozzle
- 1x upholstery nozzle
- 1x floor nozzle
- 1x extension pipe
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS HAND-HELD VACUUM CLEANER – SET

BC-VC250-X – SET S

Part of the battery platform

20 V LIXES

ONE BATTERY FOR ALL DEVICES

2in1

- Hand-held vacuum cleaner
- Vacuum cleaner



BRUSHLESS

PRODUCT DATA

Dimensions L x W x H	250 x 180 x 1270 mm
Engine type	Brushless motor
Battery voltage	20 V
Suction power max.	20 kPa
Container volume	600 ml
Suction levels	2-stage
Max. air flow	660 L/min

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	1.2 / 3.5 kg	1.2 / 4.5 kg
Packaging dimensions	300 x 135 x 700 mm	300 x 135 x 860 mm
Item number	5909277900	5909277400
EAN	4046664287445	4046664302360
20 containers	855 pcs.	798 pcs.
40 containers	1785 pcs.	1673 pcs.
40 HQ containers	2040 pcs.	1940 pcs.



max. 660 L/min



Cyclone technology



LED



600 ml



20 V



UNIVERSAL APPLICATION



Carpet



Textiles



Car



Tight spaces



Dry vacuuming



High ceilings



Four LED lights for clear illumination of the cleaning area.



Bagless vacuuming thanks to cyclone technology.




Two power settings: long runtime in low-speed mode, maximum suction power in high-speed mode.



3-filter system consisting of metal mesh, pleated and foam filters ensures clean exhaust air.



Wall mount for quick access and space-saving storage of appliance and accessories.

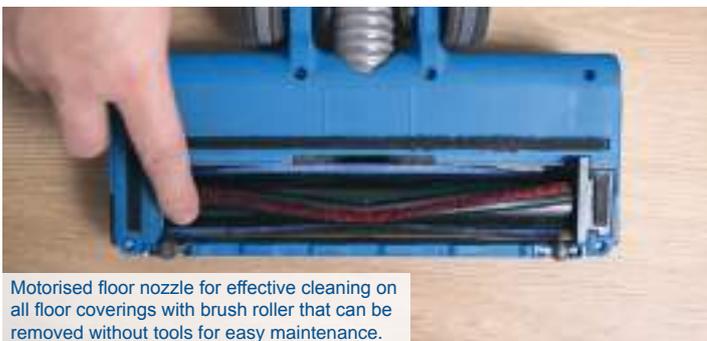

Motorised floor nozzle for effective cleaning on all floor coverings with brush roller that can be removed without tools for easy maintenance.

+ INCLUDING

- Metal pipe extension
- 2-in-1 combination nozzle
- Joint nozzle
- Folded filter
- Motorised floor nozzle
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS WET/DRY VACUUM CLEANER – SET

C-NTS15-X – SET L

3in1

- Wet vacuuming
- Dry vacuuming
- Blow-out function



PRODUCT DATA

Dimensions L x W x H	310 x 290 x 400 mm
Engine type	Brush motor
Battery voltage	20 V
Max. suction power	10 kPa
Container volume	12 L
Hose length	1.5 m
Folded filter	Yes

LOGISTICAL DATA

	Single device	SET L
	Without battery / charger	1x 4.0 Ah battery 1x 2.4 A charger
Weight net / gross	3.2 / 4 kg	4.2 / 5.2 kg
Packaging dimensions	300 x 300 x 400 mm	300 x 300 x 400 mm
Item number	5907738900	5907738400
EAN	4046664234340	4046664302728
20 containers	985 pcs.	985 pcs.
40 containers	2100 pcs.	2100 pcs.
40 HQ containers	2350 pcs.	2350 pcs.



Running time when idle:

2.0 Ah

4.0 Ah



20 min

40 min

Specification per battery charge
Running time and performance may vary depending on external conditions.



Maximum freedom of movement thanks to cordless operation.



Handle and 4 smooth-running 360° castors for easy transport.



Sturdy, break-proof collection bucket with a capacity of 12 litres and quick-release fastener for easy bag replacement.



Practical accessory holder for tidy storage and working.



Washable folded filter filters even the smallest dust particles.

UNIVERSAL APPLICATION



**Wet
vacuuming**




**Dry
vacuuming**



Car



Carpet

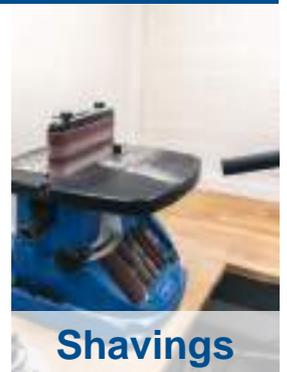

Shavings

+ INCLUDING

- 3x plastic extension pipe
- Folded filter
- Paper bag
- Foam filter
- Floor nozzle
- Joint nozzle
- Vacuum hose
- 1x 20 V / 4.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS WET/DRY VACUUM CLEANER – SET

C-NTS20-X – SET L

3in1

- Wet vacuuming
- Dry vacuuming
- Blow-out function

Click here for
optional accessories



Part of the battery platform

20 V IXES

ONE BATTERY FOR ALL DEVICES

PRODUCT DATA

Dimensions L x W x H	335 x 335 x 500 mm
Engine type	Brush motor
Battery voltage	20 V
Max. suction power	10 kPa
Container volume	20 L
Hose length	1.5 m
Folded filter	Yes

LOGISTICAL DATA

	Single device	SET L
	Without battery / charger	1x 4.0 Ah battery 1x 2.4 A charger
Weight net / gross	4.1 / 5.2 kg	4.9 / 6.2 kg
Packaging dimensions	345 x 345 x 465 mm	345 x 345 x 465 mm
Item number	5907739900	5907739400
EAN	4046664234357	4046664268499
20 containers	595 pcs.	595 pcs.
40 containers	1210 pcs.	1210 pcs.
40 HQ containers	1225 pcs.	1255 pcs.



Running time when idle:

2.0 Ah

4.0 Ah



20 min

40 min

Specification per battery charge
Running time and performance may vary depending on external conditions.



Maximum freedom of movement thanks to cordless operation.



Aluminium telescopic pipe extendable from 480 to 780 mm.



Sturdy, rustproof stainless steel collection bucket with a capacity of 20 litres and quick-release fastener for easy bag replacement.




Practical accessory holder for tidy storage and working.




Washable folded filter filters even the smallest dust particles.

UNIVERSAL APPLICATION

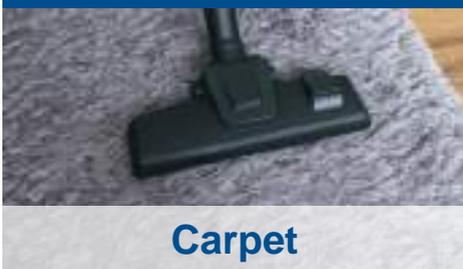

Carpet

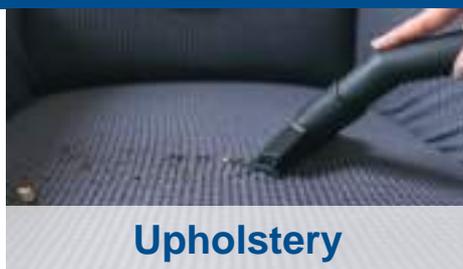

Upholstery




Wet vacuuming



Dry vacuuming



Car

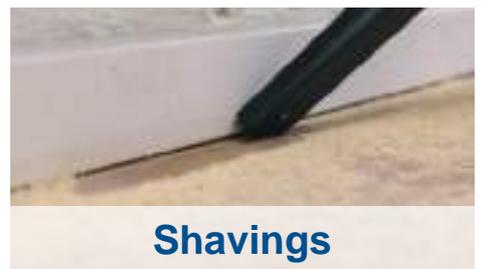

Shavings

+ INCLUDING

- Folded filter
- Paper bag
- Floor nozzle
- Joint nozzle
- Foam filter
- Aluminium telescopic pipe
- Plastic extension pipe
- Upholstery nozzle
- Vacuum hose
- 1x 20 V / 4.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS ASH VACUUM CLEANER – SET

C-AVC15-X – SET S

Click here for
optional accessories




PRODUCT DATA

Dimensions L x W x H	290 x 290 x 350 mm
Engine type	Brush motor
Battery voltage	20 V
Max. suction power	10 kPa
Container volume	15 L
Hose length	100 cm
Folded filter	Yes

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	2.4 / 3.4 kg	3.1 / 4.1 kg
Packaging dimensions	300 x 300 x 370 mm	300 x 300 x 370 mm
Item number	5906405900	5906405400
EAN	4046664234364	4046664268451
20 containers	1060 pcs.	1060 pcs.
40 containers	2180 pcs.	2180 pcs.
40 HQ containers	2515 pcs.	2515 pcs.



UNIVERSAL APPLICATION



Vacuuming ash



Vacuuming



Blowing out



Blasting connection for blowing out areas that are awkward to access.



230 mm aluminium pipe is ideal for vacuuming up ashes.



Quick-release fastener on the housing cover.



Folded filter for coarse dirt and ash.

Running time when idle:	
2.0 Ah	4.0 Ah
	
20 min	40 min

Specification per battery charge
Running time and performance may vary depending on external conditions.



With practical carrying handle for easy transport.

+ INCLUDING

- Aluminium pipe
- Vacuum hose
- Folded filter
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS PRESSURE CLEANER – SET

C-HPG35-X – SET S

2in1

- Mobile cleaning work
- Garden watering



PRODUCT DATA

Dimensions L x W x H	890 x 220 x 65 mm
Engine type	Brush motor
Battery voltage	20 V
Maximum pressure	35 bar
Max. flow rate	180 L/h
Max. water temperature	50°
Number of spray functions	0°, 15°, 25°, 40° & watering function
Suction height	0.6 m
Suction hose length	6 m

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	1.5 / 2.7 kg	2.3 / 3.8 kg
Packaging dimensions	387 x 243 x 127 mm	387 x 242 x 127 mm
Item number	5907740900	5907740400
EAN	4046664236054	4046664267980
20 containers	1680 pcs.	1422 pcs.
40 containers	3360 pcs.	2850 pcs.
40 HQ containers	4200 pcs.	3420 pcs.

35 bar


6 m

Max. 180 L/h

Self-priming

Quick-Connect-System

20 V



Running time when idle:

2.0 Ah

4.0 Ah



15 min

30 min

Specification per battery charge
Running time and performance may vary depending on external conditions.



Fast and effective cleaning thanks to a flow rate of 180 L/h.



Integrated hose filter – protects the pressure cleaner from contamination from dirty water.



5-position adjustable nozzle: 0°, 15°, 25°, 40°, watering function



Suitable for conventional garden hoses.



Quick-connect system for fast attachment changes.

UNIVERSAL APPLICATION



Bicycles



Furniture



Garden watering



Paving stones



Car tyres



Machines

+ INCLUDING

- 5-in-1 nozzle
- Extraction hose
- Extension piece
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS WORK LIGHT – SET

C-WL20-X – SET S

Part of the battery platform

20 V IXES
ONE BATTERY FOR ALL DEVICES

2in1

- Bar light
- Front light

360°



PRODUCT DATA

Dimensions L x W x H	269 x 108 x 110 mm
Engine type	Bürten engine
Battery voltage	20 V
LED output	5 W
Luminous flux	300 lumens
Colour temperature	approx. 6200 K
Light head	270° rotatable 180° swivellable in 6 stages

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	0.39 / 0.53 kg	approx. 1.1/1.7 kg
Packaging dimensions	110 x 75 x 185 mm	260 x 90 x 185 mm
Item number	5909244900	5909244400
EAN	4046664217855	4046664248828
20 containers	11512 pcs.	tba
40 containers	24472 pcs.	tba
40 HQ containers	26928 pcs.	tba

300
lm

6200K



270°



0° – 180°



20 V



Operating time (bar light and front light):

2.0 Ah

4.0 Ah



7.5 h

15 h

Specification per battery charge
Running time and performance may vary depending on external conditions




Can be rotated 270° and swivelled 180° and in 6 steps
Adjustable lamp head – for optimum illumination.



300 lumens of luminous flux provide bright and even working light.



Compact, ergonomic design with soft-grip handle for high operator comfort.

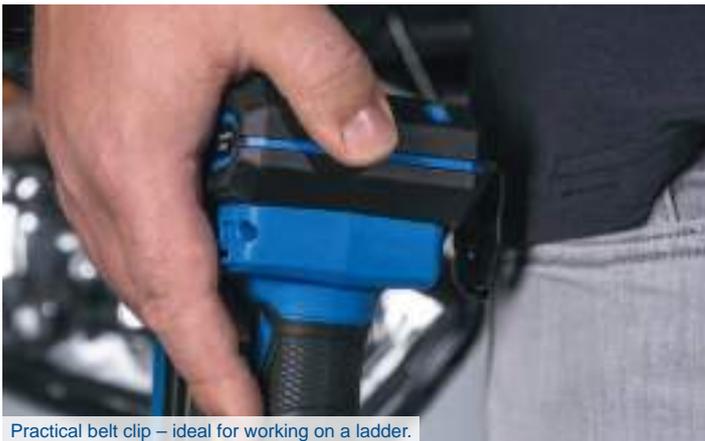

Practical belt clip – ideal for working on a ladder.



Integrated mounting hook for easy hanging of the lamp
– Ideal for mobile use in the workshop, when camping or in the car.

UNIVERSAL APPLICATION



Bar light



Front light

+ INCLUDING

- 1x 20 V / 4.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS WORK LIGHT – SET

C-AL2000-X – SET S

Part of the battery platform

20 V IXES
ONE BATTERY FOR ALL DEVICES

+ X
PLUS X AWARD
2024 | Achieved for:
High Quality
Design
Ease of Use
Functionality
www.plusaward.com



PRODUCT DATA

Dimensions L x W x H	250 x 180 x 270 mm
Engine type	Brush motor
Battery voltage	20 V
LED output	20 x 1 W
Luminous flux	500 / 1000 / 2300 lm
Colour temperature	approx. 5700 K
Light head	360°
Tripod mount	5/8" / 1/4"

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	1.3 / tba kg	approx. 1.3 / 2.5 kg
Packaging dimensions	250 x 190 x 203 mm	250 x 190 x 203 mm
Item number	5909278900	5909278400
EAN	4046664287483	4046664302148
20 containers	tba	tba
40 containers	tba	tba
40 HQ containers	tba	tba

500 / 1000 / 2300 lm

5700K

360°

20 V / 100 – 240 V~

20 V



HYBRID FUNCTION



Battery



Power supply



Integrated thread for easy mounting on a tripod (1/4" or 5/8").



Practical hook so the light can be hung up easily.



Robust housing with carrying handle to ensure easy transport.



The head can be rotated 360° to ensure targeted and ideal lighting of the working area.



Colour temperature 5,700 K and 20 LEDs ensure uniform lighting similar to daylight.



High luminous flux up to 2300 lm – adjustable in 3 steps: 500 lm, 1,000 lm and 2300 lm for adaptable lighting conditions depending on requirements.

INCLUDING

- Power supply
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger

CORDLESS WORKSHOP BLOWER – SET


C-WBL180-X – SET S

Part of the battery platform

20 V LIXES
ONE BATTERY FOR ALL DEVICES

3in1

- Blowing out
- Inflate
- Vacuum

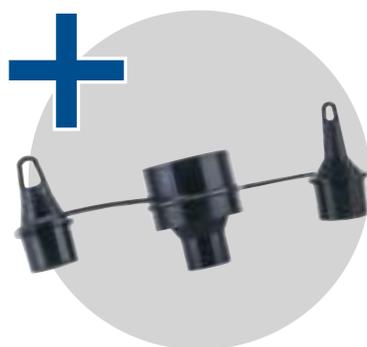

PRODUCT DATA

Dimensions L x W x H	510 x 280 x 150 mm
Engine type	Brush motor
Battery voltage	20 V
Air speed	1. Stage 130 km/h 2. Stage 180 km/h
Speed	11,500 – 15,500 rpm
Blower type	Radial

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	1.1 / 1.3 kg	1.1 / 2.5 kg
Packaging dimensions	280 x 145 x 185 mm	330 x 160 x 220 mm
Item number	5909283900	5909283400
EAN	4046664287599	4046664302469
20 containers	3700 pcs.	2410 pcs.
40 containers	6450 pcs.	4820 pcs.
40 HQ containers	9050 pcs.	5860 pcs.

1. Stage 130 km/h
2. Stage 180 km/h

11,500 – 15,500 rpm

20 V

3in1






Powerful cordless workshop blower for removing dust and chips - versatile use on construction sites, in workshops or for leisure applications, such as vacuuming air mattresses.



2 speed stages for application-specific setting options (130 km/h / 180 km/h).



Compact, ergonomic design with soft-grip handle for high operator comfort.

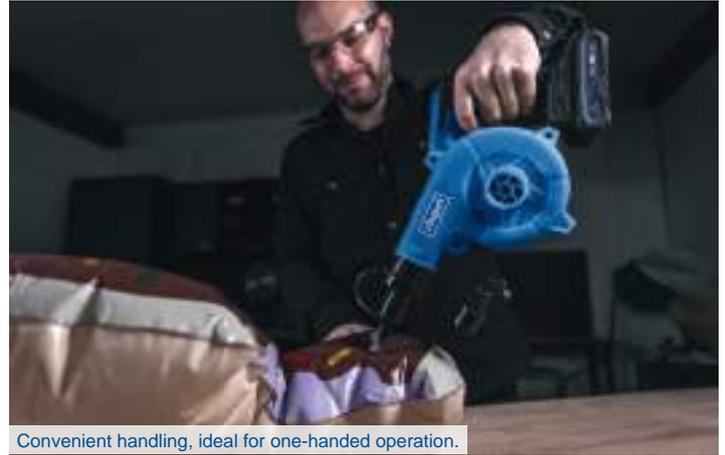

Convenient handling, ideal for one-handed operation.



The attachments for switching between functions can be reconfigured in just a few simple steps.



UNIVERSAL USE



Blowing out



Inflate



Vacuum

INCLUDING

- 3x inflation adapters
- 1 x extension tube
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS JOBSITE RADIO – SET

C-DAB30-X – SET S

Part of the battery platform

20V LIXES

ONE BATTERY FOR ALL DEVICES



PRODUCT DATA

Dimensions L x W x H	221 x 220 x 273 mm
Engine type	Brush motor
No input voltage	20 V
Reception area	DAB+ and FM
Audio transmission	Bluetooth and USB-A
Bluetooth range	> 10 m
Charging options	USB-A: 5 V, 2.1 A (charging and music playback) USB-C: 5 V, 2.4 A (charging)
Speaker power	30 W stereo


LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	3.5 / 4 kg	approx. 4.6 / 5.1 kg
Packaging dimensions	230 x 230 x 400 mm	230 x 230 x 370 mm
Item number	5909268900	5909291900
EAN	4046664274254	4046664299554
20 containers	2017 pcs.	2017 pcs.
40 containers	4164 pcs.	4164 pcs.
40 HQ containers	4815 pcs.	4815 pcs.

DAB+ & FM



True Wireless Stereo sound



Bluetooth



Preset equaliser



IP65



20 V



HYBRID FUNCTION

Battery sold separately



Battery

Including



Power supply



TWS technology (True Wireless Stereo) for wireless pairing of two identical devices for genuine stereo sound.




Large LCD display with illumination, battery charge level indicator, date and time display.

USB PORTS



USB-A

for playing music and charging a mobile phone or tablet, for example



USB-C

for charging a mobile phone or tablet, for example



Robust housing with practical carry handle.



+ INCLUDING

- Power supply
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger

schepach
Germany

CORDLESS CARTRIDGE GUN – SET

C-SEG310-X – SET S



PRODUCT DATA

Dimensions L x W x H	390 x 70 x 210 mm
Engine type	Brush motor
Battery voltage	20 V
Pressing-out force	2000 N
Cartridge size max.	Max. 310 ml
Feed speed	Max. 215 mm/min
Speed setting	6-stage

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	1 / 1.3 kg	approx. 1 / 2.4 kg
Packaging dimensions	218 x 81 x 390 mm	410 x 220 x 80 mm
Item number	5909282900	5909282400
EAN	4046664287582	4046664302476
20 containers	3200 pcs.	3200 pcs.
40 containers	6500 pcs.	6500 pcs.
40 HQ containers	7700 pcs.	7700 pcs.



Max. 310 ml



Max. 215 mm/min



LED



20 V





High pressing force of up to 2000 N for effortless processing of even tough materials.



Suitable for cartridges up to 310 ml – ideal for common sealants and adhesives.



Slim design with ergonomic soft grip for comfortable handling.



LED light for optimum illumination of the working area even in poor lighting conditions.



Reverse mechanism prevents dripping.



6-speed adjustable speed for optimum control with different materials and feed rates.


+ INCLUDING

- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS HOT MELT GLUE GUN – SET

C-HGG170-X – SET S

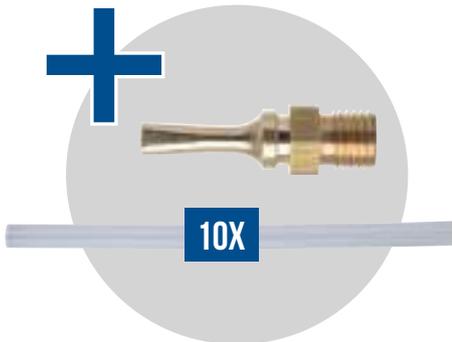

PRODUCT DATA	
Dimensions L x W x H	180 x 68 x 202 mm
Engine type	Brush motor
Battery voltage	20 V
Heat-up time	120 sec.
Max. temperature	170°
Glue stick Ø	11 mm

	LOGISTICAL DATA	
	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	0.31 / tba kg	1.1 / 1.87 kg
Packaging dimensions	183 x 83 x 220 mm	287 x 205 x 82 mm
Item number	5907615900	5907615400
EAN	4046664287346	4046664302155
20 containers	6000 pcs.	4000 pcs.
40 containers	13,000 pcs.	8500 pcs.
40 HQ containers	15,300 pcs.	10,000 pcs.

120 sec.



170°



11 mm



Overheating protection



20 V





Very fast operational readiness after only 120 seconds of heating time.



Practical LED display of the heating status.



Cordless hot melt glue gun for versatile applications such as crafting, model making, DIY or small repairs.



10 glue sticks with a diameter of 11 mm and 2 different nozzles for adjusting the amount of material are included in the scope of delivery.



Practical dispensing lever for precise glue dispensing.



Work cordlessly with the Scheppach IXES 20-volt series – all batteries and chargers can be combined with the cordless hot melt glue gun.



LED light for optimum illumination of the work area, even in poor lighting conditions.

+

 INCLUDING

- 10x glue sticks
- Standard nozzle
- Pointed nozzle
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS HEAT GUN – SET

C-HAG550-X – SET S



PRODUCT DATA

Dimensions L x W x H	165 x 75 x 225 mm
Engine type	Brush motor
Battery voltage	20 V
Air quantity	200 L/min
Temperature levels	350° / 550°
Overheating protection	Yes

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	0.6 / 1.2 kg	approx. 0.6 / 1.8 kg
Packaging dimensions	170 x 88 x 236 mm	290 x 235 x 80 mm
Item number	5904003900	5904003400
EAN	4046664287353	4046664302131
20 containers	5200 pcs.	4200 pcs.
40 containers	11,000 pcs.	8500 pcs.
40 HQ containers	13,000 pcs.	10,000 pcs.

350° / 550°



200 L/min



Overheating protection



20 V



UNIVERSAL APPLICATION



without attachment



Reduction nozzle



Reflector nozzle



Wide jet nozzle



Easy to use thanks to a selector switch for quickly switching between the two temperature settings of 350° and 550°.



Integrated overheating protection for maximum safety during operation.



Ergonomic, compact and lightweight design with soft-grip handle for high operating comfort.



Tool-free attachment change for maximum flexibility.

INCLUDING

- Wide jet nozzle
- Reflector nozzle
- Reduction nozzle
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger




CORDLESS STAPLE AND NAIL GUN – SET

C-NAG180-X – SET S

Part of the battery platform

20 V LIXES
ONE BATTERY FOR ALL DEVICES

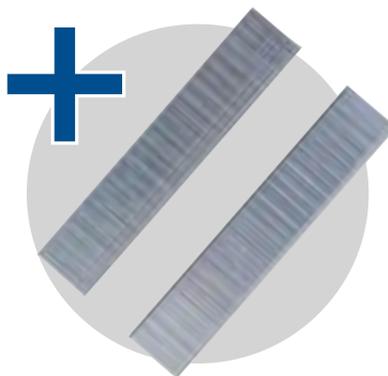

2in1

- Stapling
- Nailing



PRODUCT DATA

Dimensions L x W x H	245 x 75 x 250 mm
Engine type	Brush motor
Battery voltage	20 V
Shots per minute	60
Magazine capacity	85 pcs.
Staple length	15 – 25 mm
Nail length	15 – 32 mm

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	1.9 / 2.4 kg	1.9 / 3.7 kg
Packaging dimensions	250 x 245 x 75 mm	440 x 230 x 100 mm
Item number	5909279900	5909279400
EAN	4046664287551	4046664302223
20 containers	4352 pcs.	2520 pcs.
40 containers	9216 pcs.	5140 pcs.
40 HQ containers	10,000 pcs.	5720 pcs.

60 shots/min

15 – 25 mm

15 – 32 mm

20 V

2in1





Robust gearbox enables 60 impacts per minute.



Setting wheel for variable adjustment of the impact depth.



Processes nails with a length of 15 – 32 mm and staples with a length of 15 – 25 mm.



Prevents unintentional stapling or nailing.



LED work light for optimum illumination of the work area.



Flush working on edges thanks to the slim stapler nose.



Magazine features a capacity of 85 pieces and an integrated filling level indicator.

UNIVERSAL USE



Stapling



Nailing

INCLUDING

- 300x nails
- 300x staples
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS MACHINE SET 3 PCS.

BPS100

LOGISTICAL DATA

Weight net / gross	8 / 10.3 kg
Packaging dimensions	480 x 385 x 203 mm
Item number	5909105400
EAN	4046664260615
20 containers	635 pcs.
40 containers	1340 pcs.
40 HQ containers	1575 pcs.

PRODUCT DATA

Engine type	Brushless motor
Battery voltage	20 V

BC-RHD230-X – Cordless hammer drill

Dimensions L x W x H	210 x 105 x 270 mm
Tool receiver	SDS-Plus
Max. drill Ø	27 mm (wood) 13 mm (metal) 24 mm (concrete)
Max. impact force	2.2 J
Max. stroke rate	5500 bpm
Idle speed	1400 rpm
LED	Yes
Anti-Kickback function	No
Pulse function	No
Depth Record Function	No

BC-DD60-X – Cordless drill

Dimensions L x W x H	195 x 75 x 195 mm
Max. torque	60 Nm
Idle speed	1. Gear: 0 – 450 rpm 2. Gear: 0 – 1600 rpm
Torque levels	25 + 1
Chuck clamping range	1.5 - 13 mm
Max. drill Ø	Wood (38 mm) Metal (13 mm)
LED	Yes

BC-AG125-X – Cordless angle grinder

Dimensions L x W x H	395 x 240 x 115 mm
Idle speed	3000 – 10,000 rpm
Disc Ø	125 mm
Tool receiver	M14
Lock function	Spindle lock
Soft start	Yes
Anti-Kickback function	No
Overload protection	Yes

SBP4.0 – Rechargeable battery

Dimensions L x W x H	125 x 80 x 70 mm
Battery capacity	4.0 Ah

SDBC2.4A – Twincharger

Dimensions L x W x H	205 x 125 x 75 mm	
	Input 	Output 
Rated voltage	230 – 240 V~ / 50 Hz	21.5V 
Rated current		2.4 A
Rated power consumption	130 W	



BRUSHLESS

20 V



BC-RHD230-X

4-in-1

- Drilling
- Hammer drilling
- Chiselling
- Chisel orientation



The SDS-Plus drill chuck enables tool-free drill bit changes.



Central selector switch for quick, tool-free switching between functions.



Additional 360° rotatable handle enables safe drilling and guidance of the machine.

BC-DD60-X

2in1

- Screwdriving function
- Drilling function



The high-quality and robust quick-release metal drill chuck has a clamping range of 1.5–13 mm with automatic spindle lock.



Rotational speed preset via powerful 2-speed gearbox.



Quick, tool-free switching between drilling and screwdriving functions.

25 torque stages and 1 drilling stage for working in line with the material and application.

BC-AG 125-X

3in1

- Cutting off
- Sanding
- Deburring



3-position front handle with non-slip soft grip for added comfort and safety.



Ergonomic, slim design with rubberised handle and aluminium front for high operating comfort and working in tight spaces.



6-stage speed setting – for working in accordance with the material and application.

+ INCLUDING

- 3x concrete drill bits (6, 8, 10 mm)
- 1x pointed chisel (14 x 250 mm)
- 1x flat chisel (14 x 250 mm)
- Depth stop
- Belt clip
- 2x 20 V / 4.0 Ah battery
- 1x 2.4 A twincharger



LAWN CARE

- 138 – 147 Battery-powered lawnmower
- 148 – 149 Cordless cylinder lawnmower
- 150 – 151 Cordless grass and edge trimmer
- 152 – 157 Cordless strimmer
- 158 – 161 Cordless brush cutter

SHRUB AND HEDGE CARE

- 162 – 163 Cordless grass & hedge trimmer
- 164 – 165 Cordless pruning shears
- 166 – 169 Cordless multi-function device
- 170 – 175 Cordless hedge trimmers

TREE CARE

- 176 – 179 Cordless pruning saw
- 180 – 181 Cordless top handle chainsaw
- 182 – 185 Cordless chainsaws

WORKING WITH LEAVES, SOIL AND GROUND

- 186 – 187 Cordless leaf blower
- 188 – 189 Cordless leaf vacuum/blower
- 190 – 191 Cordless weed sweeper
- 192 – 195 Cordless garden tillers
- 196 – 197 Cordless hand-held spreader
- 198 – 199 Cordless earth auger


CLEANING SYSTEMS

- 200 – 201 Cordless sweeper
- 202 – 203 Cordless snow blower
- 204 – 205 Cordless rain barrel pump
- 206 – 207 Cordless garden pump

BATTERIES AND CHARGERS

- 208 – 209 Batteries
- 210 – 211 Battery charger
- 212 – 217 Starter kits



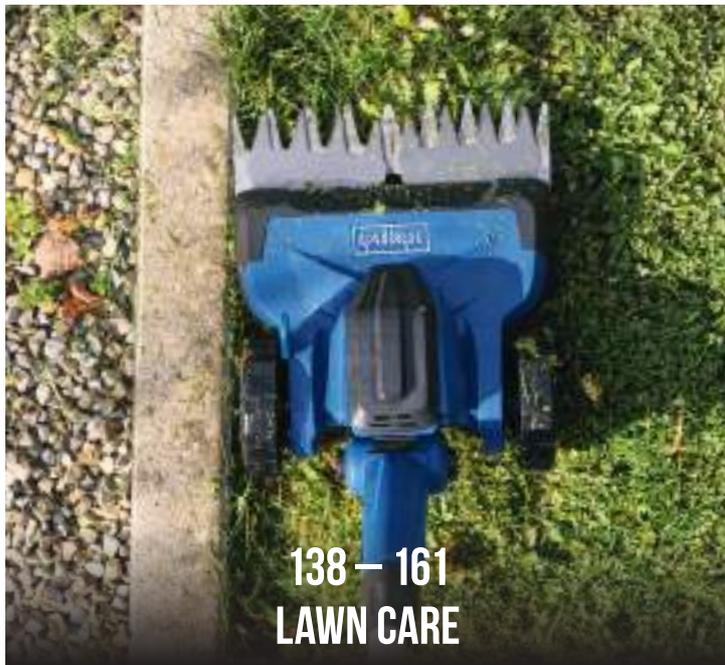

22 CM BATTERY-POWERED LAWMOWER – SET

BC-MP220-X – SET S

Part of the battery platform

20 V LIXES
ONE BATTERY FOR ALL DEVICES



2in1

- Mowing
- Mulching



BRUSHLESS

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 20 V / 2.0 Ah battery 1x 2.4 A battery charger
Weight net / gross	4.4 / 5.5 kg	5.4 / 6.5 kg
Packaging dimensions	520 x 370 x 210 mm	520 x 370 x 210 mm
Item number	5911416900	5911416400
EAN	4046664236429	4046664268512
20 containers	600 pcs.	600 pcs.
40 containers	1200 pcs.	1200 pcs.
40 HQ containers	1500 pcs.	1500 pcs.

PRODUCT DATA

Dimensions L x W x H	1410 x 350 x 155 mm
Engine type	Brushless motor
Battery voltage	20 V
Lawn	120 m ²
Max. cutting width	21.5 cm
Cutting height adjustment	3-layer: 30 - 50 mm
Collection basket	No
Start system	Electric start
Mulching	Yes
Side discharge	No
Cleaning function	No
Wheel drive	No
LED	No
Housing material	Plastic

120 m²



21.5 cm



30 - 50 mm



Compact



20 V



Running time when idle:

2.0 Ah

4.0 Ah



15 min

30 min

Specification per battery charge
Running time and performance may vary depending on external conditions




Detachable shaft for space-saving storage.



Cutting height adjustment in 3 stages from 30-50 mm.



Three-wheel design for easy manoeuvring.

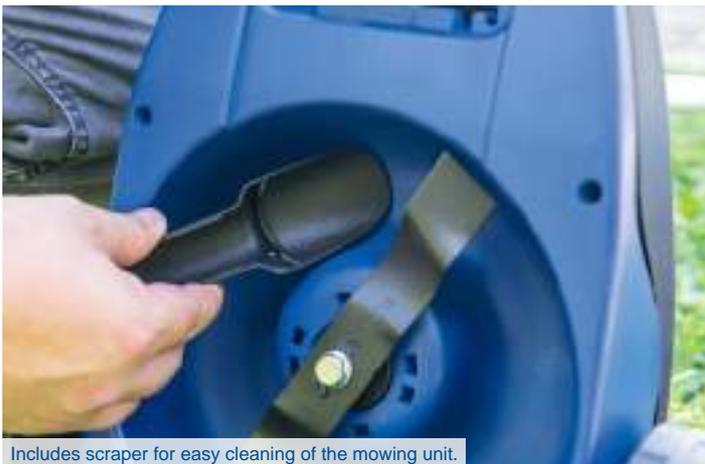

Includes scraper for easy cleaning of the mowing unit.



Electric start



Swivelling handlebar for easy mowing under bushes or garden furniture.

02/2026 Technical modifications and errors reserved.

+ INCLUDING

- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



32 CM BATTERY-POWERED LAWMOWER – SET

BC-MP320-X – SET L

Part of the battery platform

20 V LIXES
ONE BATTERY FOR ALL DEVICES

PLUS X AWARD

2026 | Achieved for:

- High Quality
- Ease of Use
- Functionality
- Ergonomics

www.plusaward.com

+

2.4 A

Battery-Set

4.0 Ah

Click here for
optional accessories



BRUSHLESS

3 in 1

- Mowing
- Collecting
- Grass at edge is drawn in for cutting

360°



PRODUCT DATA

Dimensions L x W x H	1410 x 350 x 155 mm
Engine type	Brushless motor
Battery voltage	20 V
Lawn	250 – 300 m ²
Max. cutting width	32 cm
Cutting height adjustment	Axial, 20 – 60 mm
Collection basket	30 L
Start system	Electric start
Mulching	Yes
Side discharge	No
Cleaning function	No
Wheel drive	No
LED	No
Housing material	Plastic

LOGISTICAL DATA

	Single device	SET L
	Without battery / charger	1x 4.0 Ah battery 1x 2.4 A charger
Weight net / gross	8 / 9 kg	8.06 / 11.2 kg
Packaging dimensions	600 x 390 x 310 mm	600 x 390 x 350 mm
Item number	5911413900	5911413403
EAN	4046664217572	4046664247869
20 containers	400 pcs.	350 pcs.
40 containers	800 pcs.	700 pcs.
40 HQ containers	930 pcs.	805 pcs.

250 – 300 m²

32 cm

30 – 50 mm

30 L

20 V





Robust housing with integrated carrying handle to ensure easy transport.

Running time when idle:	
2.0 Ah	4.0 Ah
	
15 min	30 min

Specification per battery charge
Running time and performance may vary depending on external conditions



Axial cutting height adjustment in 3 steps from 20 to 60 mm.



Foldable handle ensures easy transport and space-saving storage.



Cut-to-edge design on both sides for clean mowing, even close to the edge where the grass is drawn in for cutting.

+ INCLUDING

- 1x 20 V / 4.0 Ah battery
- 1x 2.4 A battery charger



38 CM BATTERY-POWERED LAWMOWER – SET

BC-MP380-X – SET XL2

Part of the battery platform

20 V LIXES
ONE BATTERY FOR ALL DEVICES



Click here for
optional accessories



4 in 1

- Mowing
- Collecting
- Mulching
- Grass at edge is drawn in for cutting

BRUSHLESS

PRODUCT DATA

Dimensions L x W x H	1178 x 432 x 1030 mm
Engine type	Brushless motor
Battery voltage	2x 20 V (40 V)
Lawn	450 – 500 m ²
Max. cutting width	38 cm
Cutting height adjustment	Central, 25 – 75 mm
Collection basket	45 L
Start system	Electric start
Mulching	Yes
Side discharge	No
Cleaning function	No
Wheel drive	Yes
LED	No
Housing material	Plastic

LOGISTICAL DATA

	Single device	SET XL2
	Without battery / charger	2x 20 V / 4.0 Ah battery 1x 4.5 A battery charger
Weight net / gross	12.6 / 14.2 kg	12.6 / 17.2 kg
Packaging dimensions	725 x 430 x 375 mm	720 x 430 x 370 mm
Item number	5911414900	5911414400
EAN	4046664217565	4046664222224
20 containers	258 pcs.	tba
40 containers	516 pcs.	tba
40 HQ containers	611 pcs.	611 pcs.

450 – 500 m²

38 cm

25 - 75 mm

45 L

20 V





Height-adjustable bow handle ensures an ergonomic working posture

Running time when idle:	
2.0 Ah	4.0 Ah
	
25 min	50 min

Specification per battery charge
Running time and performance may vary depending on external conditions



Foldable handle ensures easy transport and space-saving storage.



Central cutting height adjustment in 6 steps from 25 to 75 mm.



Includes mulch insert so the cut grass can be re-used as fertiliser.



Cut-to-edge design on both sides for clean mowing, even close to the edge where the grass is drawn in for cutting.

+ INCLUDING

- 2x 20 V / 4.0 Ah battery
- 1x 4.5 A battery charger



43 CM BATTERY-POWERED LAWMOWER – SET

BC-MP430-X – SET XL2

Part of the battery platform

20 V LIXES
ONE BATTERY FOR ALL DEVICES



4 in 1

- Mowing
- Collecting
- Mulching
- Grass at edge is drawn in for cutting

BRUSHLESS

PRODUCT DATA

Dimensions L x W x H	1350 x 470 x 1150 mm
Engine type	Brushless motor
Battery voltage	2x 20 V (40 V)
Lawn	600 – 700 m ²
Max. cutting width	43 cm
Cutting height adjustment	Central, 25 – 75 mm
Collection basket	50 L
Start system	Electric start
Mulching	Yes
Side discharge	No
Cleaning function	No
Wheel drive	No
LED	No
Housing material	Plastic

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	2x 20 V / 4.0 Ah battery 1x 4.5 A battery charger
Weight net / gross	14.4 / 15,8 kg	14.4 / 19.4 kg
Packaging dimensions	805 x 470 x 385 mm	800 x 465 x 380 mm
Item number	5911415900	5911415400
EAN	4046664217558	4046664222200
20 containers	210 pcs.	200 pcs.
40 containers	420 pcs.	400 pcs.
40 HQ containers	504 pcs.	450 pcs.

600 – 700 m²

43 cm

25 - 75 mm

50 L

20 V





Height-adjustable bow handle ensures an ergonomic working posture

Running time when idle:	
2.0 Ah	4.0 Ah
	
30 min	60 min

Specification per battery charge
Running time and performance may vary depending on external conditions



Foldable handle ensures easy transport and space-saving storage.




Central cutting height adjustment in 6 steps from 25 to 75 mm.



User-friendly operating panel with the option to switch between "Eco" and "Auto" mode.



Includes mulch insert so the cut grass can be re-used as fertiliser.

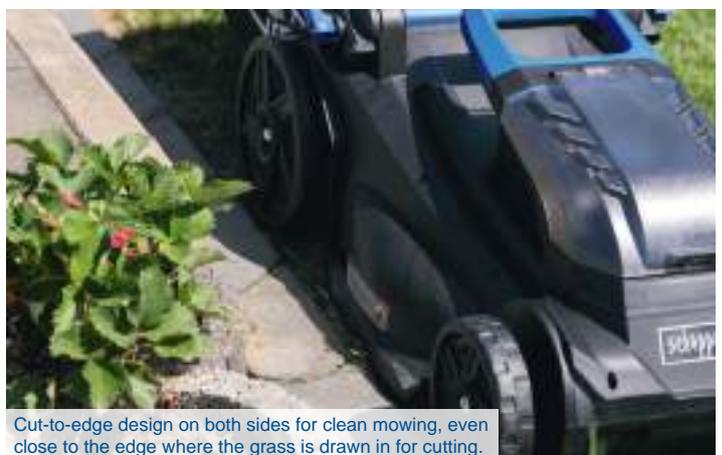

Cut-to-edge design on both sides for clean mowing, even close to the edge where the grass is drawn in for cutting.

+ INCLUDING

- 2x 20 V / 4.0 Ah battery
- 1x 4.5 A battery charger



47 CM BATTERY-POWERED LAWMOWER – SET

BC-MP470-X – SET XL2x2



6 in 1

- Mowing
- Collecting
- Mulching
- Grass at edge is drawn in for cutting
- Side discharge
- Cleaning function



BRUSHLESS

LOGISTICAL DATA

	Single device	SET XL2x2
	Without battery / charger	4x 20 V / 4.0 Ah battery 2x 4.5 A battery charger
Weight net / gross	31 / 34 kg	31 / 41 kg
Packaging dimensions	930 x 580 x 460 mm	920 x 585 x 463 mm
Item number	5911417900	5911417400
EAN	4046664235101	4046664257202
20 containers	120 pcs.	105 pcs.
40 containers	210 pcs.	220 pcs.
40 HQ containers	260 pcs.	260 pcs.

PRODUCT DATA

Dimensions L x W x H	1650 x 560 x 1100 mm
Engine type	Brushless motor
Battery voltage	2x 20V (40V) + 2x battery expansion
Lawn	700 m ²
Max. cutting width	47 cm
Cutting height adjustment	Central, 26 – 80 mm
Collection basket	75 L
Start system	Electric start
Mulching	Yes
Side discharge	Yes
Cleaning function	Yes
Wheel drive	Yes
LED	Yes
Housing material	Plastic

700 m²

47 cm

26 - 80 mm

75 L

Vario wheel drive
2.5 – 4.5 km/h

20 V





Powerful 2x 20 V for operation and battery expansion for 2 additional batteries.



Foldable handle ensures easy transport and space-saving storage.



Includes mulch insert so the cut grass can be re-used as fertiliser.



Central cutting height adjustment in 7 steps from 26 to 80 mm.



Vario drive – rear wheel drive with adjustable speed (2.5 to 4.5 km/h)



Side ejector can be easily attached/detached if needed.

+ INCLUDING

- 4x 20 V / 4.0 Ah battery
- 2x 4.5 A battery charger



CORDLESS CYLINDER LAWMOWER – SET

C-SPM380-X – SET S

Part of the battery platform

20 V LIXES
ONE BATTERY FOR ALL DEVICES



2in1

- Mowing
- Collecting

PRODUCT DATA

Dimensions L x W x H	1140 x 570 x 865 mm
Engine type	Brushed motor
Battery voltage	20 V
Lawn area	Approx. 200 m ²
Cutting width	max. 38 cm
Height adjustment	4 stages, 14 – 38 mm
Number of blades	5
Collection basket	45 L

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	11.5 / 13 kg	10.8 / 13 kg
Packaging dimensions	575 x 425 x 315 mm	575 x 425 x 315 mm
Item number	5911420900	5911420400
EAN	4046664286257	4046664302797
20 containers	360 pcs.	360 pcs.
40 containers	720 pcs.	720 pcs.
40 HQ containers	880 pcs.	880 pcs.

Approx. 200 m²

max. 38 cm

4 stages
14 – 38 mm

45 L

20 V





Large grass collection box with a capacity of up to 45 L.



Cutting height adjustment in 4 steps from 14 to 38 mm.




Low-noise operation.



Wide, lawn-friendly wheels.



Perfect cutting result thanks to 5 rotating, precision-ground blades made of high-quality steel.

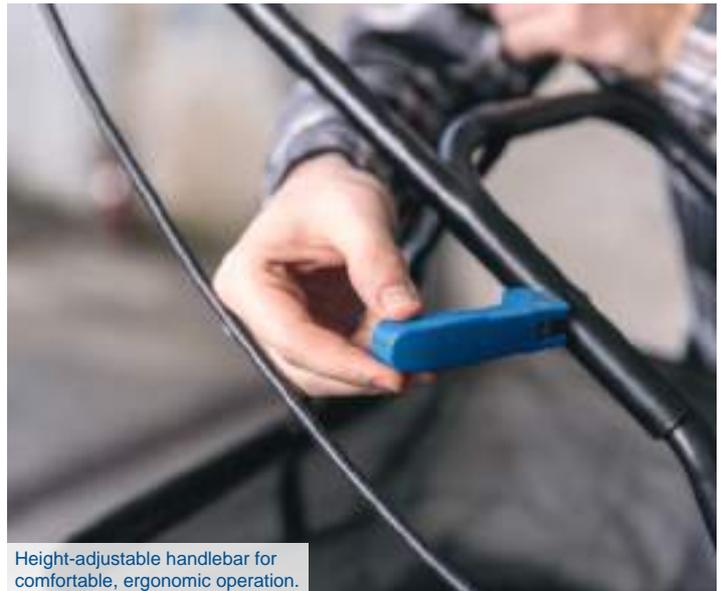

Height-adjustable handlebar for comfortable, ergonomic operation.

02/2026 Technical modifications and errors reserved.

+ INCLUDING

- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS GRASS AND EDGE TRIMMER – SET

C-RKS250-X – SET S

Part of the battery platform

20 V LIXES

ONE BATTERY FOR ALL DEVICES



PRODUCT DATA

Dimensions L x W x H	1230 x 250 x 320 mm
Engine type	Brush motor
Battery voltage	20 V
Max. cutting width	250 mm
Cutting height adjustment	3-layer: 30 / 40 / 50 mm
Idle speed	1000 rpm
Cutting system	Double blade system
Telescopic function	No
Edge cutting function	Yes

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	2.8 / 3.5 kg	2.8 / 4.3 kg
Packaging dimensions	580 x 265 x 150 mm	580 x 265 x 150 mm
Item number	5910909900	5910909400
EAN	4046664287520	4046664302728
20 containers	1230 pcs.	1230 pcs.
40 containers	2560 pcs.	2560 pcs.
40 HQ containers	3000 pcs.	3000 pcs.

Close-to-edge cutting



Adjustable handlebar angle



Cutting width max. 250 mm



3-level cutting height 30 / 40 / 50 mm



Double blade system



20 V





Clean cutting results thanks to an effective double blade system, even with dense grass.



Adjustable handle angle allows cutting deep under bushes, play equipment and fences.



Optimised housing shape for cutting close to edges without obstruction from protruding wheels.



3-level cutting height adjustment between 30 mm, 40 mm and 50 mm.



Ergonomically designed handle for fatigue-free working.

+ INCLUDING

- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS STRIMMER – SET

C-LT300-X – SET S

Part of the battery platform

20 V LIXES
ONE BATTERY FOR ALL DEVICES



2 in 1

- Trimming
- Lawn edging



PRODUCT DATA

Dimensions L x W x H	1235 x 335 x 356 mm
Engine type	Brush motor
Battery voltage	20 V
Max. cutting width	300 mm
Idle speed	6500 rpm
Cutting system	Single thread system
Line specification	1.6 mm / 4 m
Line feed	Automatic
Telescopic function	Max. 2700 mm
Edge cutting function	Yes
Rotatable cutting head	Yes

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	2.2 / 3 kg	2.2 / 4.3 kg
Packaging dimensions	1020 x 200 x 140 mm	1020 x 200 x 140 mm
Item number	5910904900	5910904400
EAN	4046664216735	4046664222392
20 containers	1000 pcs.	1000 pcs.
40 containers	2000 pcs.	2000 pcs.
40 HQ containers	2500 pcs.	2500 pcs.

300 mm

Telescopic shaft

Automatic line feed

20 V



Running time when idle:

2.0 Ah

4.0 Ah



40 min

80 min

Specification per battery charge
Running time and performance may vary depending on external conditions.



Telescopic shaft can be extended by 270 mm – ensuring an ergonomic working posture.



Adjustable additional handle for adapting to local conditions and the relevant application.



Thanks to its adjustment options, the C-LT300-X is perfect for slopes.



Cutting head can be rotated and adjusted by 90° – ideal for vertical areas and lawn edges.



Thanks to the rotatable cutting head, even areas with difficult access can be processed.



Fold-out plant protection bracket protects flowers, plants and other sensitive objects from damage.

UNIVERSAL APPLICATION



Trimming



Lawn edging

02/2026 Technical modifications and errors reserved.

+ INCLUDING

- 2x thread coil
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS STRIMMER – SET

C-LT300-X – SET S2

Part of the battery platform

20 V LIXES
ONE BATTERY FOR ALL DEVICES



2 in 1

- Trimming
- Lawn edging



PRODUCT DATA

Dimensions L x W x H	1235 x 335 x 356 mm
Engine type	Brush motor
Battery voltage	20 V
Max. cutting width	300 mm
Idle speed	6500 rpm
Cutting system	Single thread system
Line specification	1.6 mm / 4 m
Line feed	Automatic
Telescopic function	Max. 2700 mm
Edge cutting function	Yes
Rotatable cutting head	Yes

LOGISTICAL DATA

	Single device	SET S2
	Without battery / charger	2x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	2.2 / 3 kg	2.2 / 4.9 kg
Packaging dimensions	1020 x 200 x 140 mm	1020 x 200 x 140 mm
Item number	5910904900	5910905400
EAN	4046664216735	4046664222729
20 containers	1000 pcs.	1000 pcs.
40 containers	2000 pcs.	2000 pcs.
40 HQ containers	2500 pcs.	2500 pcs.

300 mm

Telescopic shaft

Automatic line feed

20 V



Running time when idle:

2.0 Ah



40 min

4.0 Ah



80 min

Specification per battery charge
Running time and performance may vary depending on external conditions.



Telescopic shaft can be extended by 270 mm – ensuring an ergonomic working posture.



Adjustable additional handle for adapting to local conditions and the relevant application.



Thanks to its adjustment options, the C-LT300-X is perfect for slopes.



Cutting head can be rotated and adjusted by 90° – ideal for vertical areas and lawn edges.



Thanks to the rotatable cutting head, even areas with difficult access can be processed.




Fold-out plant protection bracket protects flowers, plants and other sensitive objects from damage.

UNIVERSAL APPLICATION



Trimming

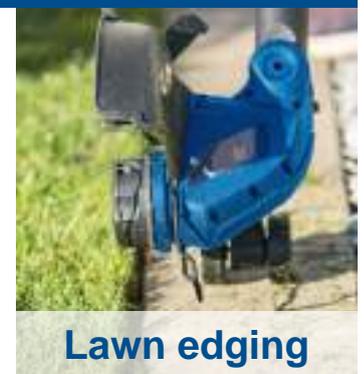

Lawn edging

+ INCLUDING

- 2x thread coil
- 2x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger




CORDLESS STRIMMER

C-LT240-X

Part of the battery platform

20 V LIXES

ONE BATTERY FOR ALL DEVICES

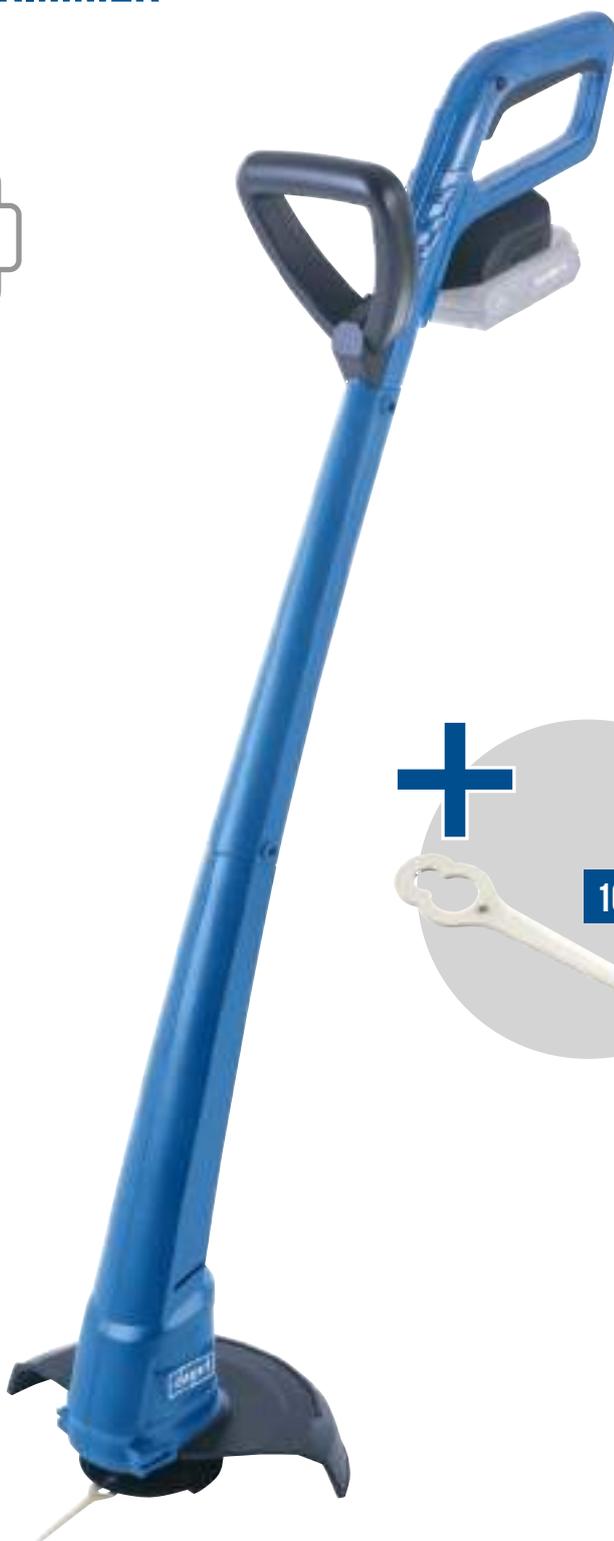

PRODUCT DATA	
Dimensions L x W x H	260 x 280 x 1100 mm
Engine type	Brush motor
Battery voltage	20 V
Max. cutting width	240 mm
Idle speed	10000 rpm
Cutting system	Plastic blade
Telescopic function	no
Edge cutting function	no

Battery and battery charger available separately

LOGISTICAL DATA	
Weight net / gross	1.3 / 2 kg
Packaging dimensions	180 x 150 x 490 mm
Item number	5910908900
EAN	4046664287490
20 containers	1800 pcs.
40 containers	3600 pcs.
40 HQ containers	4360 pcs.

Lightweight



Cutting width
max. 240 mm



10000 rpm



Impact-resistant plastic



20 V





Speedy tool-free plastic blade change.



Convenient 2-handed operation thanks to additional handle.



At just 1.3 kg (excluding battery) the strimmer is particularly lightweight.



Robust plastic blade.



The C-LT240-X cordless strimmer from Scheppach is perfect for maintaining lawn edges and hard-to-reach areas.

02/2026 Technical modifications and errors reserved.

+ INCLUDING

• 10 blades



CORDLESS BRUSH CUTTER – SET

BC-BCH330/20-X – SET L

Part of the battery platform
20V LIXES
 ONE BATTERY FOR ALL DEVICES

2 in 1

- Grass trimmer
- Brush cutter



BRUSHLESS

PRODUCT DATA

Dimensions L x W x H	1780 x 350 x 245 mm
Engine type	Brushless motor
Battery voltage	20 V
Idle speed	3-stage, 4000 / 4700 / 5500 rpm
Cutting system	
Max. cutting width	330 mm
Line specification	2x 1.6 mm / line length 4 m
Line feed	Tap'n'Go
Blade specification	3 Z / 255 x 25.4 mm

LOGISTICAL DATA

	Single device	SET L
	Without battery / charger	1x 20 V / 4.0 Ah battery 1x 2.4 A battery charger
Weight net / gross	4.5 / 6 kg	4.5 / 7.5 kg
Packaging dimensions	1020 x 135 x 230 mm	1020 x 135 x 230 mm
Item number	5910906900	5910906400
EAN	4046664233893	4046664268505
20 containers	828 pcs.	828 pcs.
40 containers	1690 pcs.	1690 pcs.
40 HQ containers	1900 pcs.	1880 pcs.

3-stage, 4000 / 4700 / 5500 rpm

Max. 330 mm

Max. 255 mm

1.6 mm

20 V

2in1





Operating panel for setting the speed in 3 steps.

Running time when idle:	
2.0 Ah	4.0 Ah
	
40 min	80 min


Specification per battery charge
Running time and performance may vary depending on external conditions.



Shoulder strap allows fatigue-free work.



Bike handle can be adjusted without the need for tools, allowing ergonomic work.

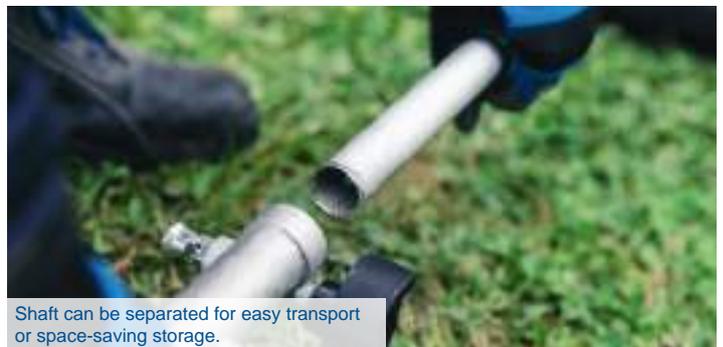

Shaft can be separated for easy transport or space-saving storage.

UNIVERSAL APPLICATION



Grass trimmer



Brush cutter

+ INCLUDING

- 1x carrying strap
- 1x 20 V / 4.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS BRUSH CUTTER – SET

BC-BCH380/40-X – SET L2

Part of the battery platform

20 V LIXES
ONE BATTERY FOR ALL DEVICES

PLUS X AWARD

2026 | Achieved for:

- High Quality
- Ease of Use
- Functionality
- Ergonomics

www.plusaward.com

Schepach BC-BCH380/40-X

Premium Class 1,6

Heimwerker Praxis 2/28

Price/performance: very good



+

2.4 A

Battery-Set

2x 4.0 Ah



Click here for
optional accessories

2in1

- Grass trimmer
- Brush cutter

BRUSHLESS

PRODUCT DATA

Dimensions L x W x H	1920 x 550 x 490 mm
Engine type	Brushless motor
Battery voltage	2x 20 V (40 V)
Idle speed	3-stage, 4000 / 5000 / 6200 rpm
Cutting system	
Max. cutting width	380 mm
Line specification	2x 1.6 mm / line length 4 m
Line feed	Tap'n'Go
Blade specification	3 Z / 255 x 25.4 mm

LOGISTICAL DATA

	Single device	SET L2
	Without battery / charger	2x 20 V / 4.0 Ah battery 1x 2.4 A double charger
Weight net / gross	5.5 / 7 kg	7.7 / 9.5 kg
Packaging dimensions	1120 x 160 x 230 mm	1120 x 160 x 230 mm
Item number	5910907900	5910907400
EAN	4046664233909	4046664268659
20 containers	900 pcs.	900 pcs.
40 containers	1800 pcs.	1800 pcs.
40 HQ containers	2200 pcs.	2200 pcs.

3-stage, 4000 / 5000 / 6200 rpm

Max. 380 mm

Max. 255 mm

1.6 mm

2x 20 V (40 V)

2in1





Operating panel for setting the speed in 3 steps.

Running time when idle:	
2.0 Ah	4.0 Ah
	
45 min	90 min

Specification per battery charge
Running time and performance may vary depending on external conditions.



Shoulder strap allows fatigue-free work.



Anti-vibration technology allows ergonomic working with low vibrations.



Bike handle can be adjusted without the need for tools, allowing ergonomic work.




Shaft can be separated for easy transport or space-saving storage.

UNIVERSAL APPLICATION



Grass trimmer

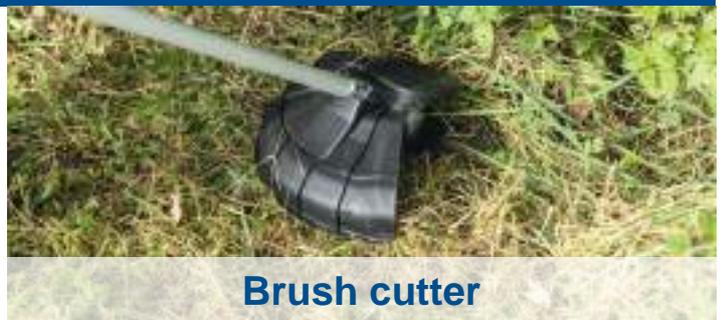

Brush cutter

+ INCLUDING

- 1x Shoulder strap
- 2x 20 V / 4.0 Ah battery
- 1x 2.4 A double charger



CORDLESS GRAS AND HEDGE TRIMMER – SET

C-HTGS200-X – SET S

Part of the battery platform
20 V LIXES
 ONE BATTERY FOR ALL DEVICES

2in1

- Lawn edging
- Hedge and shrub cutting



PRODUCT DATA

Dimensions L x W x H	260 x 80 x 120 mm
Engine type	Brush motor
Battery voltage	20 V
Grass cutting blade width	90 mm
Hedge cutting blade cutting length	200 mm
Idle speed	1200 ^{rpm}
Tool change system	Tool-free click system
Cutting system	Hardened precision blades

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	1 / 1.5 kg	1.9 / 2.4 kg
Packaging dimensions	360 x 120 x 120 mm	505 x 115 x 120 mm
Item number	5912205900	5912205400
EAN	4046664216872	4046664222859
20 containers	4860 pcs.	3410 pcs.
40 containers	9720 pcs.	6820 pcs.
40 HQ containers	11,520 pcs.	7720 pcs.

200 mm

90 mm

Hardened
precision blades

20 V





Comfortable working thanks to its handy size, ergonomic soft-grip handle and low weight.

Running time when idle:	
2.0 Ah	4.0 Ah
	
3.5 h	7 h

Specification per battery charge
Running time and performance may vary depending on external conditions.



Safety switch with switch-on lock.



Hardened precision blades ensure optimum cutting results.



Tool-free click system for easy blade replacement.



Safety switch with switch-on lock.

UNIVERSAL APPLICATION



Hedge and shrub cutting



Lawn edging

+ INCLUDING

- Hedge cutting blade
- Grass cutting blade
- 2 protective covers
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS PRUNING SHEARS – SET

BC-PRS28-X – SET S

Part of the battery platform

20 V LIXES
ONE BATTERY FOR ALL DEVICES



BRUSHLESS

PRODUCT DATA

Dimensions L x W x H	335 x 230 x 126 mm
Engine type	Brushless motor
Battery voltage	20 V
Cutting capacity	2-stage, 15 & 28 mm
Cutting system	Anvil blade

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	0.9 / 1.2 kg	1.45 / 2.4 kg
Packaging dimensions	330 x 120 x 140 mm	335 x 210 x 160 mm
Item number	5911606900	5911606400
EAN	4046664243502	4046664302728
20 containers	5747 pcs.	2500 pcs.
40 containers	11700 pcs.	5200 pcs.
40 HQ containers	13957 pcs.	6000 pcs.

2-stage, 15 & 28 mm



Lightweight



20 V





Ergonomic shape with soft-grip surfaces for effortless working.

Cutting performance: Round timber Ø 12 mm	
2.0 Ah	4.0 Ah
	
3500 cuts	7000 cuts

Specification per battery charge
Running time and performance may vary depending on external conditions.



Safe storage, thanks to protective cover.



Robust and durable plastic housing. Low weight and compact design.



Front hand guard for maximum safety.



High-quality steel anvil blade for precise cutting work that is gentle on plants.



2 cutting diameters (15 mm and 28 mm) can be set.



+ INCLUDING

- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS MULTIFUNCTION DEVICE – SET

C-PHTS410-X – SET S



2 in 1

- Hedge trimmer
- Pole-mounted pruner

Part of the battery platform

20 V LIXES
ONE BATTERY FOR ALL DEVICES

Click here for
optional accessories

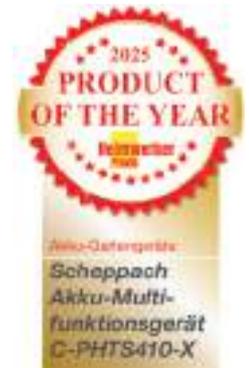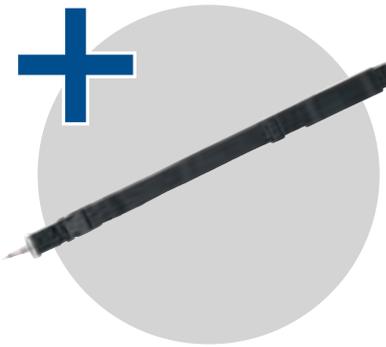

PRODUCT DATA

Dimensions L x W x H	1220 x 224 x 218 mm
Engine type	Brush motor
Battery voltage	20 V
Pole-mounted pruner	
Blade length	203 mm
Max. cutting length	180 mm
Chain specifications	8" / 3/8" / 1.27 mm / 33
Cutting speed	max. 4.5 m/s
Overall length	2.35 m
Hedge trimmer	
Maximum branch diameter	max. 16 mm
Max. cutting length	410 mm
Cutting speed	1200 rpm
Cutting angle	90°-240°
Overall length	2.6 m

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 20 V / 2.0 Ah battery 1x 2.4 A battery charger
Weight net / gross	4.85 / 5.9 kg	4.85 / 6.77 kg
Packaging dimensions	1235 x 142 x 145 mm	1255 x 150 x 244 mm
Item number	5912404900	5912404400
EAN	4046664217602	4046664222408
20 containers	982 pcs.	tba
40 containers	2105 pcs.	tba
40 HQ containers	2524 pcs.	tba

180 mm

410 mm

Max. 4.5 m/s

1200 rpm

2.6 m

2x 20 V (40 V)





Hedge trimmer attachment can be locked at 11 different angles.



Tool-free chain tensioning and chain replacement with automatic chain lubrication.



Soft-grip handle with safety switch.

2.0 Ah	4.0 Ah
	
Pole-mounted pruner cutting capability: Round timber Ø 50 mm	
150 cuts	300 cuts
Hedge trimmer running time when idle:	
60 min	120 min
<small>Specification per battery charge Running time and performance may vary depending on external conditions.</small>	



Hedge trimmer attachment can be locked at 11 different angles (90° to 240°), the pole-mounted pruner can be locked in 4 different positions (135° to 180°).



Shoulder strap allows fatigue-free work.

UNIVERSAL APPLICATION



Pole-mounted pruner



Hedge trimmer

+ INCLUDING

- 1x carrying strap
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS MULTIFUNCTION DEVICE – SET

BC-MFH400-X – SET S2.5

Part of the battery platform
20 V LIXES
 ONE BATTERY FOR ALL DEVICES



4 in 1


- Grass trimmer
- Hedge trimmer
- Brush cutter
- Pole-mounted pruner



BRUSHLESS

PRODUCT DATA

Dimensions L x W x H	2170 x 130 x 200 mm
Engine type	Brushless motor
Battery voltage	2x 20 V (40 V)
Pole-mounted pruner	
Blade length	295 mm
Max. cutting length	254 mm
Chain specifications	10" / 3/8" / 1.27 mm / 39
Cutting speed	max. 18 m/s
Overall length	2.15 m
Hedge trimmer	
Maximum branch diameter	max. 24 mm
Max. cutting length	390 mm
Cutting speed	880/1100/1360 rpm
Cutting angle	+90°/0°/-75°
Overall length	2.35 m
Grass trimmer	
Cutting system	Double line
Max. cutting width	380 mm
Line specification	2x 1.6 mm / line length 4 m
Line feed	Tap'n'Go
Speed	4000/5500/6200 rpm
Brush cutter	
Max. cutting width	255 mm
Blade specification	3 Z / 255 x 25.4 mm
Speed	4000/5500/6200 rpm

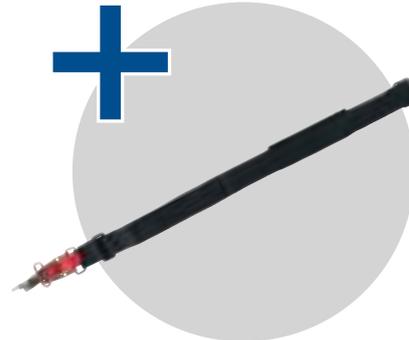

LOGISTICAL DATA

	Single device	SET S2.5
	Without battery / charger	2x 20 V / 2.0 Ah battery 1x 2.4 A twin charger
Weight net / gross	9.2 / 11 kg	9.1 / 13 kg
Packaging dimensions	1120 x 260 x 260 mm	1115 x 270 x 175 mm
Item number	5904820900	5904820400
EAN	4046664216865	4046664222491
20 containers	630 pcs.	550 pcs.
40 containers	1260 pcs.	1394 pcs.
40 HQ containers	1500 pcs.	1394 pcs.

3-level speed adjustment

Ø 380 mm

Max. 255 mm

254 mm

390 mm

4in1





Cutter head can be adjusted by 165°



Operating panel for setting the speed in 3 steps.



Tool-free replacement of individual attachments.

2.0 Ah	4.0 Ah
	
Pole-mounted pruner cutting capability: Round timber Ø 50 mm	
225 cuts	450 cuts
Hedge trimmer running time when idle:	
50 min	100 min
Grass trimmer running time when idle:	
30 min	60 min
Brush cutter running time when idle:	
45 min	90 min
<p>Specification per battery charge Running time and performance may vary depending on external conditions.</p>	




Shoulder strap allows fatigue-free work.


UNIVERSAL APPLICATION



Grass trimmer



Hedge trimmer



Brush cutter



Pole-mounted pruner

2x 20 V (40 V)



+ INCLUDING

- 1x carrying strap
- 1x blade and cutter guard
- 1x assembly tool
- 2x 20 V / 2.0 Ah battery
- 1x 2.4 A twin charger



CORDLESS HEDGE TRIMMER – SET

C-HT570-X – SET S

Part of the battery platform

20 V LIXES
ONE BATTERY FOR ALL DEVICES

Schepach C-HT570-X

Entry Level 1,5

**Heimwerker
Praxis** 5/24

Price/performance: very good



PRODUCT DATA

Dimensions L x W x H	930 x 200 x 160 mm
Engine type	Brush motor
Battery voltage	20 V
Blade length	560 mm
Max. cutting length	510 mm
Maximum branch diameter	16 mm
Cutting speed	2400 rpm
Rotatable handle	No

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 20 V / 2.0 Ah battery 1x 2.4 A battery charger
Weight net / gross	2 / 2.92 kg	2.88 / 4.37 kg
Packaging dimensions	1170 x 275 x 245 mm	940 x 200 x 162 mm
Item number	5910607900	5910607400
EAN	4046664217503	4046664222439
20 containers	1216 pcs.	875 pcs.
40 containers	2432 pcs.	1800 pcs.
40 HQ containers	2952 pcs.	2100 pcs.

510 mm

16 mm

Cutting speed
2400 rpm

20 V



Running time when idle:

2.0 Ah

4.0 Ah



80 min

160 min

Specification per battery charge
Running time and performance may vary depending on external conditions.



Cutting bar guard for safe storage.



Laser-cut dual-action blade for optimal cutting results.



Powerful 560 mm cutting bar with 2400 cuts per minute and 510 mm cutting length.



2-hand safety switch with quick stop ensures maximum safety during operation.



Impact protection prevents kickbacks when hitting walls, fences, etc.



Hand protection for maximum safety.

+ INCLUDING

- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS HEDGE TRIMMER – SET

BC-HT720-X – SET S2



BRUSHLESS

PRODUCT DATA

Dimensions L x W x H	1220 x 224 x 218 mm
Engine type	Brushless motor
Battery voltage	2x 20 V (40 V)
Blade length	720 mm
Max. cutting length	650 mm
Maximum branch diameter	30 mm
Cutting speed	2700 rpm
Rotatable handle	Yes

LOGISTICAL DATA

	Single device	SET S2
	Without battery / charger	2x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	4 / 4.8 kg	5.5 / 6.6 kg
Packaging dimensions	1245 x 235 x 230/190 mm	1265 x 250 x 245/105 mm
Item number	5910606900	5910606400
EAN	4046664217220	4046664222521
20 containers	670 pcs.	tba
40 containers	1430 pcs.	tba
40 HQ containers	1620 pcs.	tba

650 mm

30 mm

2700 rpm

-90° / 0° / +90°

2x 20 V (40 V)





Ergonomic soft-grip handle.

Running time when idle:	
2.0 Ah	4.0 Ah
	
40 min	80 min

Specification per battery charge
Running time and performance may vary depending on external conditions.



Handle can be rotated within the range of $-90^\circ / 0^\circ / +90^\circ$.



Collector for cut material allows convenient removal of branch waste.



2-hand safety switch with quick stop ensures maximum safety during operation.



Wall mount for space-saving storage.



Laser-cut dual action blade with aluminium guide rail.

+ INCLUDING

- 1x Blade sheath
- 1x Cuttings collector
- 2x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS TELESCOPIC HEDGE TRIMMER

C-PHS410-X

Part of the battery platform

20 V LIXES
ONE BATTERY FOR ALL DEVICES



Click here for
optional accessories



Battery and battery charger available separately

PRODUCT DATA

Dimensions L x W x H	1970 x 80 x 135 mm
Engine type	Brush motor
Battery voltage	20 V
Maximum branch diameter	max. 16 mm
Max. cutting length	410 mm
Cutting speed	1200 rpm
Cutting angle	90° – 240°
Overall length	2.6 m

LOGISTICAL DATA

Weight net / gross	4.85 / 5.9 kg
Packaging dimensions	1235 x 142 x 145 mm
Item number	5910608900
EAN	4046664239147
20 containers	1050 pcs.
40 containers	2310 pcs.
40 HQ containers	2740 pcs.

410 mm

1200 rpm

2.6 m

20 V





Motor head can be locked at 11 different angles (90° to 240°).



Durable blades made of laser-cut and diamond-ground steel.



Aluminium telescopic shaft.

Running time when idle:	
2.0 Ah	4.0 Ah
	
60 min	120 min

Specification per battery charge
Running time and performance may vary depending on external conditions.



Motor head can be locked at 11 different angles (90° to 240°), allowing the perfect adjustment to the relevant application.



Soft-grip handle with safety switch.



Shoulder strap allows fatigue-free work.

02/2026 Technical modifications and errors reserved.

+ INCLUDING
• 1x carrying strap



CORDLESS PRUNING SAW – SET

C-PS100-X – SET S

Part of the battery platform

20 V LIXES

ONE BATTERY FOR ALL DEVICES



PRODUCT DATA

Dimensions L x W x H	385 x 85 x 180 mm
Engine type	Brush motor
Battery voltage	20 V
Blade length	5"
Max. cutting length	127 mm
Chain specifications	5" / 0.30" / 1.09 mm / 43
Cutting speed	4.8 m/s
Chain tension	Automatic
Chain replacement	Tool-free
Chain lubrication	Manual
Soft start	No
Overload protection	No

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 20 V / 2.0 Ah battery 1x 2.4 A battery charger
Weight net / gross	1.2 / 2.1 kg	1.3 / 3 kg
Packaging dimensions	400 x 90 x 185 mm	470 x 98 x 200 mm
Item number	5904204900	5904204400
EAN	4046664246091	4046664257745
20 containers	3096 pcs.	2520 pcs.
40 containers	6192 pcs.	5044 pcs.
40 HQ containers	7520 pcs.	6124 pcs.

Max. 127 mm

4.8 m/s

5" / 0.30" / 1.09 mm / 43

Automatic chain lubrication

20 V





Quick and easy automatic chain tensioning using a spring tensioner.

Cutting performance: Round timber \varnothing 45 mm	
2.0 Ah	4.0 Ah
	
200 cuts	400 cuts

Specification per battery charge
Running time and performance may vary depending on external conditions.




Hand protection and chain guard ensure safe handling of the device.



Easy lubrication of the chain and blade.



Practical storage of the oil bottle on the device.

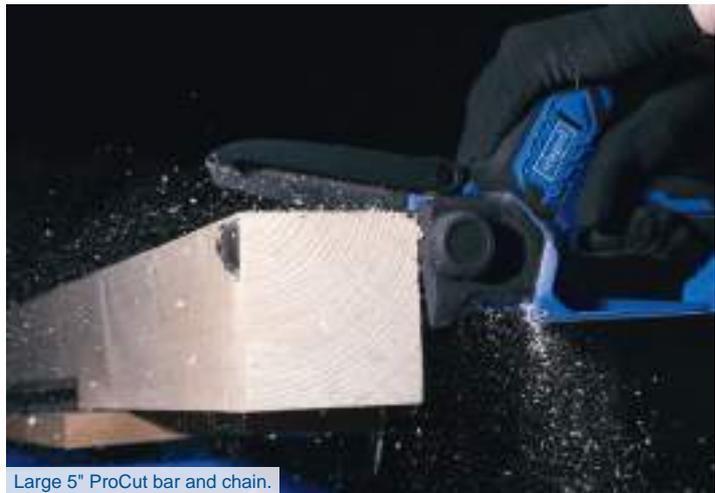

Large 5" ProCut bar and chain.


UNIVERSAL APPLICATION



Bar



Firewood

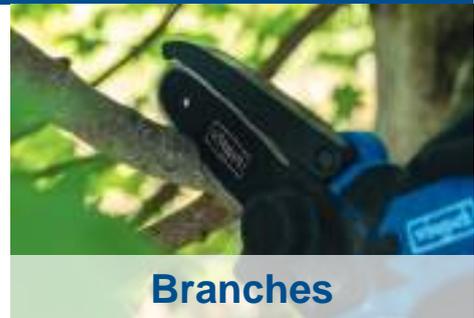

Branches

+ INCLUDING

- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS PRUNING SAW – SET

BC-PS 150-X – SET S



BRUSHLESS

PRODUCT DATA	
Dimensions L x W x H	425 x 110 x 170 mm
Engine type	Brushless motor
Battery voltage	20 V
Blade length	6"
Max. cutting length	150 mm
Chain specifications	6" / 0.3" / 1.1 mm / 28
Cutting speed	6.8 m/s
Chain tension	Automatic
Chain replacement	Tool-free
Chain lubrication	Automatic
Soft start	No
Overload protection	No

LOGISTICAL DATA		
	Single device	SET S
	Without battery / charger	1x 20 V / 2.0 Ah battery 1x 2.4 A battery charger
Weight net / gross	1.3 / 1.7 kg	2.1 / 2.7 kg
Packaging dimensions	435 x 230 x 115 mm	440 x 220 x 115 mm
Item number	5910310900	5910310400
EAN	4046664216926	4046664222330
20 containers	1900 pcs.	1900 pcs.
40 containers	3800 pcs.	3800 pcs.
40 HQ containers	4900 pcs.	4900 pcs.



Max. 150 mm

6.8 m/s

6" / 0.3" / 1.1 mm / 28

Automatic
Chain Lubrication

20 V





Automatic chain lubrication for uninterrupted operation.

Cutting performance: Round timber \varnothing 45 mm	
2.0 Ah	4.0 Ah
	
250 cuts	500 cuts

Specification per battery charge
Running time and performance may vary depending on external conditions.



The on/off switch provides additional safety.



Quick and easy automatic chain tensioning using a spring tensioner.



Hand and chain guards ensure safe handling of the device.



Large 6" ProCut bar and chain.

UNIVERSAL APPLICATION



Bar



Firewood



Branches

+ INCLUDING

- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



20 CM CORDLESS TOP HANDLE CHAINSAW – SET L

BC-TCS200-X – SET L



BRUSHLESS

PRODUCT DATA

Dimensions L x W x H	540 x 230 x 230 mm
Engine type	Brushless motor
Battery voltage	20 V
Blade length	20 cm / 8"
Max. cutting length	17.5 cm
Chain specifications	8" / 3.8" / 1.27 mm / 33
Cutting speed	7 m/s
Chain tension	Tool-free
Chain replacement	Tool-free
Chain lubrication	Automatic
Soft start	No
Overload protection	No

LOGISTICAL DATA

	Single device	SET L
	Without battery / charger	1x 4.0 Ah battery 1x 2.4 A charger
Weight net / gross	2.5 / 3.3 kg	3.5 / 4.6 kg
Packaging dimensions	270 x 230 x 230 mm	270 x 230 x 230 mm
Item number	5910311900	5910311400
EAN	4046664233879	4046664271611
20 containers	2000 pcs.	2000 pcs.
40 containers	4000 pcs.	4000 pcs.
40 HQ containers	4780 pcs.	4780 pcs.

17.5 cm

7 m/s

8" / 3.8" / 1.27 mm / 33

Automatic chain lubrication

20 V



**Cutting performance:
60 x 60 mm timber beam**

2.0 Ah

4.0 Ah



85 cuts

170 cuts

Specification per battery charge
Running time and performance may vary depending on external conditions.



Circumferential handle with soft-grip allows ergonomic working and many uses.



"Anti-kickback function" – the chain brake stops the saw chain within milliseconds in case of kickback. Hand protection guarantees additional safety.



The on/off switch guarantees safety.



The saw chain can be tensioned quickly and easily using the setting wheel.



7 m/s cutting speed ensures rapid sawing progress.



Automatic chain lubrication.

+ INCLUDING

- 1x 20 V / 4.0 Ah battery
- 1x 2.4 A battery charger



25.4 CM CORDLESS CHAINSAW – SET

C-CS254-X – SET L

Part of the battery platform

20 V LIXES
ONE BATTERY FOR ALL DEVICES



PRODUCT DATA

Dimensions L x W x H	653 x 220 x 224 mm
Engine type	Brushless motor
Battery voltage	20 V
Blade length	25.4 cm
Max. cutting length	20 cm
Chain specifications	10" / 0.375" / 1.09 mm / 40
Cutting speed	6 m/s
Chain tension	Tool-free
Chain replacement	Tool-free
Chain lubrication	Automatic
Soft start	No
Overload protection	No

LOGISTICAL DATA

	Single device	SET L
	Without battery / charger	1x 20 V / 4.0 Ah battery 1x 2.4 A battery charger
Weight net / gross	2.7 / 4 kg	2.6 / 5.4 kg
Packaging dimensions	450 x 230 x 230 mm	450 x 230 x 230 mm
Item number	5910308900	5910308401
EAN	4046664216902	4046664247876
20 containers	1200 pcs.	1200 pcs.
40 containers	2600 pcs.	2600 pcs.
40 HQ containers	2860 pcs.	2860 pcs.

20 cm

6 m/s

10" / 0.375" /
1.09 mm / 40

10" ProCut blade

Automatic chain
lubrication

20 V



**Cutting performance:
60 x 60 mm timber beam**

2.0 Ah

4.0 Ah



85 cuts

170 cuts

Specification per battery charge
Running time and performance may vary depending on external conditions.



Circumferential handle with soft-grip allows ergonomic working and many uses.



"Anti-kickback function" – the chain brake stops the saw chain within milliseconds in case of kickback. Hand protection guarantees additional safety.



Soft-grip allows a secure and firm hold during operation.



The saw chain can be tensioned quickly and easily using the setting wheel.



6 m/s cutting speed ensures rapid sawing progress.



Robust metal claw stop protects the material to be cut from slipping.

+ INCLUDING

- 1x 20 V / 4.0 Ah battery
- 1x 2.4 A battery charger



35.6 CM CORDLESS CHAINSAW – SET

BC-CS355DUO-X – SET XL2

Part of the battery platform

20 V LIXES
ONE BATTERY FOR ALL DEVICES



BRUSHLESS

PRODUCT DATA

Dimensions L x W x H	800 x 220 x 235 mm
Engine type	Brushless motor
Battery voltage	2x 20 V (40 V)
Blade length	35.6 cm
Max. cutting length	33.5 cm
Chain specifications	14" / 0.375" / 1.27 mm / 53
Cutting speed	15 m/s
Chain tension	Tool-free
Chain replacement	Tool-free
Chain lubrication	Automatic
Soft start	Yes
Overload protection	Yes

LOGISTISCHE DATEN

	Single device	SET XL2
	Without battery / charger	2x 20 V / 4.0 Ah battery 1x 4.5 A twin charger
Weight net / gross	4 / 4.4 kg	1x 4.5 A twin charger
Packaging dimensions	480 x 240 x 240 mm	495 x 250 x 350 mm
Item number	5910309900	5910309401
EAN	4046664216889	4046664247883
20 containers	1190 pcs.	2520 pcs.
40 containers	2380 pcs.	5044 pcs.
40 HQ containers	2475 pcs.	6124 pcs.

33.5 cm

15 m/s

14" / 0.375" /
1.27 mm / 53

14" ProCut blade

Automatic chain lubri-
cation

2x 20 V (40 V)



Cutting performance: 60 x 60 mm timber beam

2.0 Ah

4.0 Ah



175 cuts

350 cuts

Specification per battery charge
Running time and performance may vary depending on external conditions.



The saw chain can be tensioned quickly and easily using the setting wheel.



Circumferential handle with soft-grip allows ergonomic working and many uses.



15 m/s cutting speed ensures rapid sawing progress.



"Anti-kickback function" – the chain brake stops the saw chain within milliseconds in case of kickback. Hand protection guarantees additional safety.



Robust metal claw stop protects the material to be cut from slipping.



The on/off switch guarantees safety.

+ INCLUDING

- 2x 20 V / 4.0 Ah battery
- 1x 4.5 A twin charger



AXIAL CORDLESS LEAF BLOWER – SET

C-BL700-X – SET S



PRODUCT DATA	
Dimensions L x W x H	1260 x 550 x 370 mm
Engine type	Brush motor
Battery voltage	20 V
Air power	1. Level: 390 m ³ /h 2. Level: 516 m ³ /h
Air speed	1. Level: 115 km/h 2. Level: 155 km/h
Blower type	Axial

LOGISTICAL DATA		
	Single device	SET S
	Without battery / charger	1x 20 V / 2.0 Ah battery 1x 2.4 A battery charger
Weight net / gross	1.8 / 2.4 kg	2,6 / 3,3 kg
Packaging dimensions	485 x 285 x 160 mm	485 x 285 x 160 mm
Item number	5912104900	5912104400
EAN	4046664216827	4046664222538
20 containers	1072 pcs.	1072 Stück
40 containers	2260 pcs.	2260 Stück
40 HQ containers	2640 pcs.	2640 Stück

1. Level: 115 km/h
2. Level: 155 km/h

1. Level: 390 m³/h
2. Level: 516 m³/h

Axial fan

20 V





Pipe mounting with quick-release fastener ensures easy attachment and space-saving storage.

Running time when idle:	
2.0 Ah	4.0 Ah
	
15 min	30 min

Specification per battery charge
Running time and performance may vary depending on external conditions.



The compact design ensures a high level of user comfort and easy handling.



Axial fan ensures a higher air flow rate.



Two air speed levels 115 km/h (1st gear) and 155 km/h (2nd gear) ensure clean results.



Soft-grip balance handle ensures ergonomic work.

UNIVERSAL APPLICATION



Foliage



Sand



Rubbish

+ INCLUDING

- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS LEAF VACUUM/BLOWER – SET

BC-BLV720-X – SET S2.5

Part of the battery platform
20 V LIXES
 ONE BATTERY FOR ALL DEVICES



Click here for
 optional accessories

4 in 1

- Suction function
- Blast function
- Shredding function
- Integrated collecting bag



BRUSHLESS

PRODUCT DATA

Dimensions L x W x H	1430 x 330 x 440 mm
Engine type	Brushless motor
Battery voltage	2x 20 V (40 V)
Speed setting	9000 – 14,000 rpm
Air power	720 m³/h
Air speed	210 km/h
Shredding function	Yes
Collection bag	45 L
Blower type	Radial

LOGISTICAL DATA

	Single device	SET S2.5
	Without battery / charger	2x 20 V / 2.0 Ah battery 1x 2.4 A twin charger
Weight net / gross	3.8 / 4.8 kg	3.8 / 6.8 kg
Packaging dimensions	370 x 305 x 445 mm	580 x 265 x 150 mm
Item number	5912105900	5912105400
EAN	4046664216919	4046664222552
20 containers	590 pcs.	460 pcs.
40 containers	1190 pcs.	950 pcs.
40 HQ containers	1396 pcs.	1150 pcs.

210 km/h

720 m³/h

10:1

45 L

2x 20 V (40 V)





No tools required when switching from blowing to vacuuming/shredding mode.

Running time when idle:	
2.0 Ah	4.0 Ah
	
40 min	80 min

Specification per battery charge
Running time and performance may vary depending on external conditions.



The additional adjustable handle and a carrying strap allow an ergonomic working posture.



Window to check fill level.



High air speed of 210 km/h and an air flow rate of 720 m³/h.

UNIVERSAL APPLICATION



Foliage



Sand



Rubbish

+ INCLUDING

- 1x carrying strap
- 2x 20 V / 2.0 Ah battery
- 1x 2.4 A twin charger



CORDLESS WEED SWEEPER – SET

C-FR100-X – SET S

Part of the battery platform

20 V LIXES

ONE BATTERY FOR ALL DEVICES



PRODUCT DATA

Dimensions L x W x H	1230 x 300 x 220 mm
Engine type	Brush motor
Battery voltage	20 V
Abrasive nylon brush Ø	115 millimeters
Steel brush Ø	115 millimeters
Idle speed	1200 ^{rpm}
Telescopic function	93 - 123 cm

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	1.9 / 3 kg	1.9 / 3.87 kg
Packaging dimensions	830 x 235 x 168 mm	830 x 235 x 168 mm
Item number	5914802900	5914802400
EAN	4046664287513	4046664302742
20 containers	840 pcs.	840 pcs.
40 containers	1750 pcs.	1750 pcs.
40 HQ containers	2060 pcs.	2060 pcs.

Telescopic
93 – 123 cm



115 mm abrasive nylon
brush



115 mm steel brush



1200^{rpm}



20 V





30 cm telescopic handlebar (93 cm – 123 cm) made of aluminium.



Adjustable additional handle to ensure an ergonomic working posture.



Handle with soft grip for comfortable working.



Convenient 2-handed operation thanks to additional handle.



Easy brush replacement thanks to the Quick Connect system.



Brush guard protects against loose dirt and weeds.



Guide wheel for precise work.

INCLUDING

- Abrasive nylon brush
- Steel brush
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger

CORDLESS GARDEN TILLER – SET

C-MT200-X –SET S

Part of the battery platform

20 V LIXES

ONE BATTERY FOR ALL DEVICES



PRODUCT DATA

Dimensions L x W x H	125 x 30 x 35 mm
Engine	Brush motor
Battery voltage	20 V
Working width of	20 cm
Working depth	15.5 cm
Speed	6 stages, max. 230 rpm
Number of blades	4 pcs.


LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	3.7 / 5 kg	4.4 / 6.1 kg
Packaging dimensions	590 x 320 x 270 mm	590 x 320 x 270 mm
Item number	5912317900	5912317400
EAN	4046664287612	4046664302759
20 containers	540 pcs.	540 pcs.
40 containers	1130 pcs.	1130 pcs.
40 HQ containers	1330 pcs.	1330 pcs.

20 cm



15.5 cm



6 stages,
max. 230 rpm



4 pcs.



20 V





Comfortable handle for fatigue-free working and tool-free adjustable, ergonomic additional handle for optimum adjustment of the grip position.



24 steel blade knives with a diameter of 150 mm – for effective and thorough soil cultivation.




Six-stage speed control for optimum adaptation to every application.



Robust housing prevents damage from flying stones and foreign objects.



2-point safety switch for controlled operation and protection against accidental start-up.

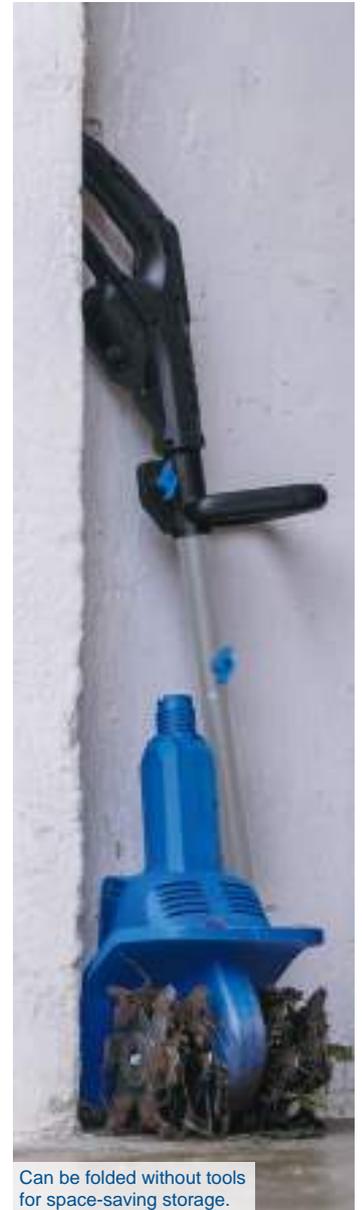

Can be folded without tools for space-saving storage.

02/2026 Technical modifications and errors reserved.

+ INCLUDING

- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS GARDEN TILLER – SET

BC-MT300-X – SET S2

Part of the battery platform

20 V LIXES

ONE BATTERY FOR ALL DEVICES



BRUSHLESS

PRODUCT DATA

Dimensions L x W x H	920 x 350 x 230 mm
Engine	Brushless motor
Battery voltage	2x 20 V (40 V)
Working width of	30 cm
Working depth	20 cm
Speed	Max. 140 rpm
Number of blades	4 pcs.

LOGISTICAL DATA

	Single device	SET S2
	Without battery / charger	2x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	8.2 / 9.5 kg	tba
Packaging dimensions	525 x 380 x 425 mm	525 x 380 x 425 mm
Item number	5912318900	5912318400
EAN	4046664287629	4046664302735
20 containers	325 pcs.	325 pcs.
40 containers	680 pcs.	680 pcs.
40 HQ containers	800 pcs.	800 pcs.


30 cm



20 cm

Max. 140 rpm

4 pcs.

2x 20 V (40 V)



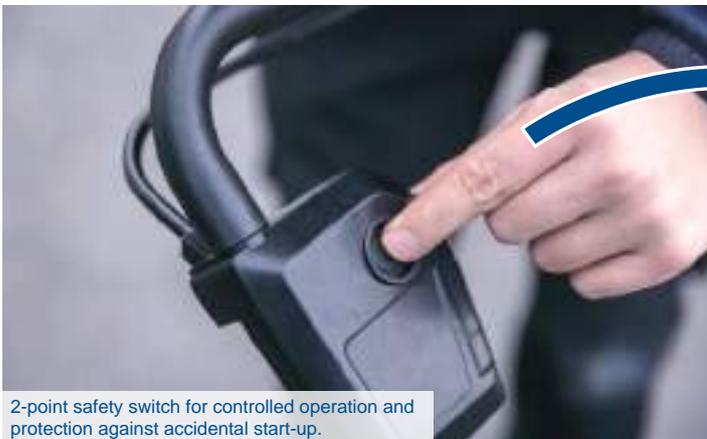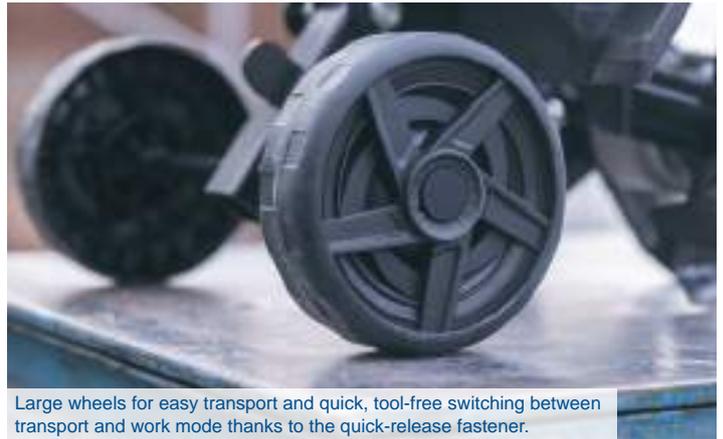

- +** INCLUDING
- 2x 20 V / 2.0 Ah battery
 - 1x 2.4 A battery charger



CORDLESS HAND-HELD SPREADER

C-GSP800-X

Part of the battery platform

20 V LIXES
ONE BATTERY FOR ALL DEVICES



Battery and battery charger available separately

PRODUCT DATA

Dimensions L x W x H	123 x 123 x 123 mm
Engine type	Brush motor
Battery voltage	20 V
Area covered	800 m ²
Max. spreading width	5 m
Speed setting	1000 – 2200 rpm
Spreading quantity settings	Yes
Capacity	3.5 L

LOGISTICAL DATA

Weight net / gross	1.1 / 1.7 kg
Packaging dimensions	295 x 235 x 310 mm
Item number	5911502900
EAN	4046664216940
20 containers	1330 pcs.
40 containers	2800 pcs.
40 HQ containers	3360 pcs.

800 m²



5 m



3.5 L



1000 – 2200 rpm



20 V





Easy spreading angle adjustment using lever.

Running time when idle:	
2.0 Ah	4.0 Ah
	
7.5 h	15 h

Specification per battery charge
Running time and performance may vary depending on external conditions



Spreading quantity adjustment in 8 steps.



Ergonomic handle with non-slip soft-grip surface.



Large spreading container capacity: 3.5 litres.



Electronic speed adjustment in 6 steps.

UNIVERSAL APPLICATION



Sand



Seeds



Salt

02/2026 Technical modifications and errors reserved.

CORDLESS EARTH AUGER – SET

BC-EB 100-X – SET L

Part of the battery platform

20 V LIXES
ONE BATTERY FOR ALL DEVICES



BRUSHLESS

PRODUCT DATA

Dimensions L x W x H	1100 x 200 x 400 mm
Engine type	Brushless motor
Battery voltage	20 V
Max. drill diameter	100 mm
Max. drill length	800 mm
Max. drill speed	125 rpm
Operating modes	Eco, Anti-clockwise, Power Mode

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 20 V / 4.0 Ah battery 1x 2.4 A battery charger
Weight net / gross	3.05 / 6.08 kg	5.82 / 7.6 kg
Packaging dimensions	890 x 397 x 202 / 115 mm	840 x 397 x 202 / 115 mm
Item number	5904705900	5904705400
EAN	4046664235309	4046664268635
20 containers	610 pcs.	600 pcs.
40 containers	1240 pcs.	1300 pcs.
40 HQ containers	1560 pcs.	1500 pcs.

100 mm



800 mm



125 rpm



Eco, Anti-clockwise,
Power Mode



20 V






Metal frame offers unbeatable stability.

40 cm depth drilling in soft ground	
2.0 Ah	4.0 Ah
	
30 pcs.	60 pcs.

Specification per battery charge
Running time and performance may vary depending on external conditions.

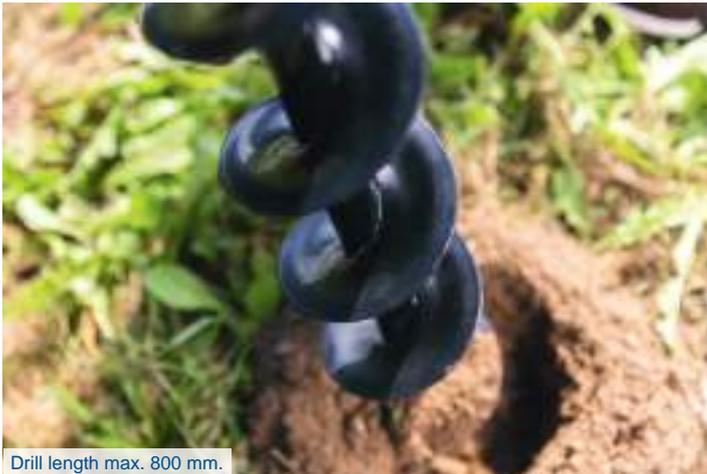

Drill length max. 800 mm.



Rapid, tool-free drill bit replacement.



3 operating modes – Eco, Anti-clockwise and Power Mode.



Dual handle with soft-grip allows ergonomic work.


UNIVERSAL APPLICATION



Trees



Foundations



Seedlings



Fence posts

INCLUDING

- 1x 20 V / 4.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS SWEEPER – SET

C-S610-X – SET S

Part of the battery platform

20 V LIXES
ONE BATTERY FOR ALL DEVICES



PRODUCT DATA

Dimensions L x W x H	990 x 610 x 1060 mm
Engine type	Brush motor
Battery voltage	20 V
Sweeping brush width	610 mm
Brush speed	220 rpm
Area coverage (4.0 Ah)	2000 m ²
Collection basket	20 L
Sweeping system	2x disc brushes
Drive	Manual

LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	10,2 / 12,2 kg	11 / 13 kg
Packaging dimensions	690 x 520 x 310 mm	690 x 520 x 310 mm
Item number	5908705900	5908705400
EAN	4046664235118	4046664268529
20 containers	250 pcs.	250 pcs.
40 containers	510 pcs.	510 pcs.
40 HQ containers	629 pcs.	629 pcs.

2000 m²



610 mm



3-stage



20 L



20 V



Running time when idle:

2.0 Ah

4.0 Ah



Highest speed

35 min

70 min

Lowest speed


75 min

150 min

Specification per battery charge
Running time and performance may vary depending on external conditions.



Brush speed adjustable in 3 stages.
160 / 190 / 220 rpm

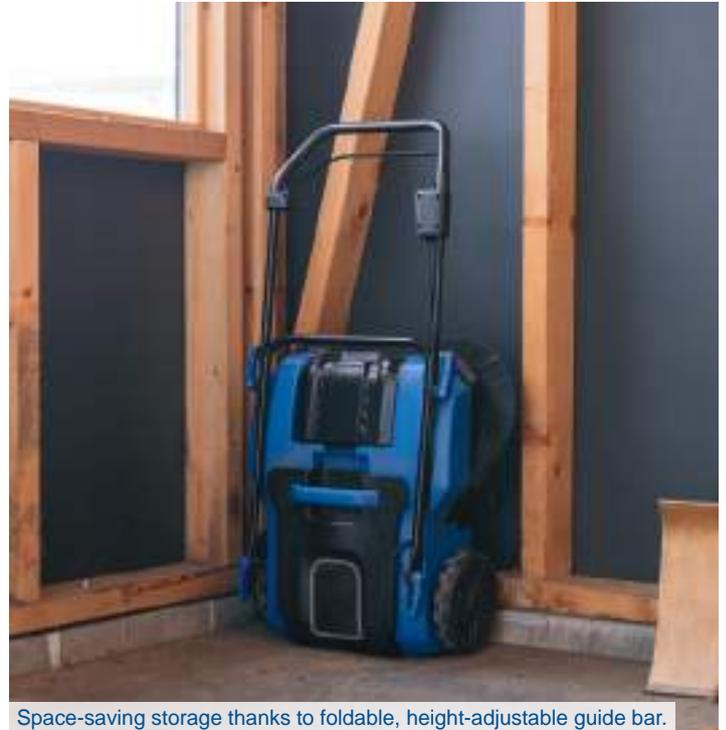

Space-saving storage thanks to foldable, height-adjustable guide bar.



Rapid work progress thanks to 2 large disc brushes and 360° adjustable ditchers.



Side-mounted brushes for sweeping close to edges.



20 litre dirt collection container with fill level viewing window.

+ INCLUDING

- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS SNOW BLOWER – SET

BC-SNB410-X – SET XL2

Part of the battery platform

20 V LIXES

ONE BATTERY FOR ALL DEVICES



LOGISTICAL DATA

	Single device	SET XL2
	Without battery / charger	2x 4.0 Ah battery 1x 4.5 A twincharger
Weight net / gross	7.1 / 9.1 kg	7.1 / 11.9 kg
Packaging dimensions	650 x 350 x 400 mm	680 x 320 x 400 mm
Item number	5908107900	5908107400
EAN	4046664287414	4046664288749
20 containers	377 pcs.	337 pcs.
40 containers	701 pcs.	701 pcs.
40 HQ containers	729 pcs.	729 pcs.


PRODUCT DATA

Dimensions L x W x H	450 x 310 x 1460 mm
Engine type	Brushless motor
Battery voltage	2x 20 V (40 V)
Idle speed	6-stage
Clearing width	40 cm
Max. ejection range	6 m
Max. snow depth	20 cm

Max. 40 cm



Max. 20 cm



6-stage speed control



Snow ejection direction



6 m



2x 20 V (40 V)





Adjustable ejection direction: left – right – straight ahead.

Running time when idle:	
2.0 Ah	4.0 Ah
	
40 min	80 min

Specification per battery charge
Running time and performance may vary depending on external conditions.



6-stage speed control – depending on snow depth and conditions.



6 m maximum ejection distance.



2-point safety switch protects against accidental activation.



40 cm maximum working width.



Additional handle enables two-handed operation.



Integrated carrying handle for easy transport.

+ INCLUDING

- 2x 20 V / 4.0 Ah battery
- 1x 4.5 A twincharger



CORDLESS RAIN BARREL PUMP – SET

C-RBP2000-X – SET S

Part of the battery platform

20 V LIXES

ONE BATTERY FOR ALL DEVICES



2in1

- Submersible pump
- Rain barrel pump



LOGISTICAL DATA

	Single device	SET S
	Without battery / charger	1x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	1.3 / 1.85 kg	2 / 2.95 kg
Packaging dimensions	215 x 200 x 240 mm	253 x 208 x 269 mm
Item number	5909412900	5909412400
EAN	4046664287407	4046664302766
20 containers	1110 pcs.	810 pcs.
40 containers	2300 pcs.	1675 pcs.
40 HQ containers	2705 pcs.	1965 pcs.

PRODUCT DATA

Dimensions L x W x H	215 x 200 x 240 mm
Engine type	Brush motor
Battery voltage	20 V
Max. flow rate	2000 L/h
Max. pressure delivered	2.0 bar
Max. delivery height	20 m
Max. immersion depth	1.8 m
Max. water temperature	35°C
Max. particle size	3 mm
Pressure connection / suction connection	3/4"

Max. delivery rate 2000 l/h



Max. delivery height 20 m



Max. submersion depth 1.8 m



Max. delivery pressure 2.0 bar



Continuous run and timer function



20 V





Mobile cordless rain barrel pump for easy water extraction from water butts or cisterns.



Practical mounting hook for the water butt.



Wall bracket for the control box.



Timer function (continuous operation, 5 min, 10 min, 15 min) enables easy control of the pump.



High-quality pump housing made of impact-resistant plastic.



Universal click system, compatible with all common hose systems.

+ INCLUDING

- Wall bracket
- Fastening hooks
- 2 m hose
- 1x 20 V / 2.0 Ah battery
- 1x 2.4 A battery charger



CORDLESS GARDEN PUMP – SET

C-GP3000-X – SET S2



PRODUCT DATA

Dimensions L x W x H	430 x 195 x 210 mm
Engine type	Brush motor
Battery voltage	2x 20 V
Max. flow rate	3000 L/h
Max. pressure delivered	2.6 bar
Max. delivery height	26 m
Max. immersion depth	8 m
Max. water temperature	35°C
Max. particle size	3 mm
Pressure connection / suction connection	G1"

LOGISTICAL DATA

	Single device	SET S2
	Without battery / charger	2x 2.0 Ah battery 1x 2.4 A charger
Weight net / gross	2.75 / 4 kg	3.85 / 5.7 kg
Packaging dimensions	448 x 265 x 212 mm	562 x 242 x 210 mm
Item number	5909411900	5909411400
EAN	4046664287377	4046664302773
20 containers	1010 pcs.	920 pcs.
40 containers	2095 pcs.	1905 pcs.
40 HQ containers	2455 pcs.	2235 pcs.

Max. delivery rate
3000 l/h



Max. delivery height
25 m



Max. submersion depth
8 m



Max. delivery pressure
2.6 bar



Eco, Medium and
Boost mode:



20 V





The G1" connection size allows for easy connection of conventional garden hoses.



Control panel with settings for Eco, Medium and Boost modes.



2 m suction hose with non-return valve and screw adapter.



Practical suction hose with filter for reliable watering of the garden.



Quick emptying via integrated water drain screw.



Practical carrying handle ideal for mobile use.

+ INCLUDING

- 2 m hose
- Non-return valve
- Screw adapter
- 2x 20 V / 2 Ah battery
- 1x 2.4 A battery charger



BATTERY

SBP2.0 / SBP4.0

Part of the battery platform

20V LIXES

ONE BATTERY FOR ALL DEVICES



PLUS X AWARD

2024 | Achieved for:

High Quality

Design

Ease of Use

Functionality

www.plusaward.com



2.0 Ah



4.0 Ah

PRODUCT DATA

	SBP2.0	SBP4.0
Dimensions L x W x H	125 x 80 x 50 mm	125 x 80 x 70 mm
Battery capacity	2.0 Ah	4.0 Ah
Battery voltage	20V	20V

LOGISTICAL DATA

	SBP2.0	SBP4.0
Weight net / gross	0.4 / 0.5 kg	0.7 / 0.8 kg
Packaging dimensions	138 x 85 x 68 mm	140 x 85 x 82 mm
Item number	7909201708	7909201709
EAN	4014915236481	4014915236504
20 containers	36300 pcs.	22500 pcs.

approx. 35 – 60 min (SBP2.0)
approx. 60 – 120 min
(SBP4.0)



LED



20 V



UNIVERSAL APPLICATION



The remaining battery capacity can be read conveniently on the 3-level LED display.

SBP8.0



8.0 Ah

PRODUCT DATA

Dimensions L x W x H	125 x 84 x 75 mm
Battery capacity	8.0 Ah
Battery voltage	20V

LOGISTICAL DATA

Weight net / gross	1 / 1.2 kg
Packaging dimensions	138 x 88 x 95 mm
Item number	7909201759
EAN	4046664292470
20 containers	22500 pcs.

approx. 3.5 h (SBP2.0)
approx. 2 h (SBP4.0)



20 V



BATTERY CHARGER

SBC2.4A / SBC4.5A



2.4 A
SBC2.4A

4.5 A
SBC4.5A

PRODUCT DATA

	SBC2.4A	
Dimensions L x W x H	125 x 83 x 73 mm	
	Input	Output
Rated voltage	230 – 240 V~ / 50 Hz	21.5V
Rated current		2.4 A
Rated power consumption	65 W	

PRODUCT DATA

	SBC4.5A	
Dimensions L x W x H	145 x 100 x 85 mm	
	Input	Output
Rated voltage	230 – 240 V~ / 50 Hz	21.5V
Rated current		4.5 A
Rated power consumption	120 W	

LOGISTICAL DATA

	SBC2.4A	SBC4.5A
Weight net / gross	0.35 / 0.4 kg	0.4 / 0.6 kg
Packaging dimensions	165 x 115 x 92 mm	187 x 125 x 97 mm
Item number	7909201710	7909201711
EAN	4014915236511	4014915236542
20 containers	12500 pcs.	12500 pcs.
40 containers	25900 pcs.	25900 pcs.
Container 40 HQ	30390 pcs.	30390 pcs.

SBC2.4A
approx. 60 min (2.0 Ah)
approx. 120 mins (4.0 Ah)

SBC4.5A
approx. 35 min (2.0 Ah)
approx. 60 mins (4.0 Ah)



LED



20 V



TWINCHARGER

SDBC2.4A / SDBC4.5A

2.4 A
SDBC2.4A

4.5 A
SDBC4.5A

2.0 Ah

4.0 Ah



Charging time SBC2.4A / SDBC2.4A

60 min

120 min

Charging time SBC4.5A / SDBC4.5A

35 min

60 min

Specification per battery charge
Running time and performance may vary depending on external conditions.



PRODUCT DATA

	SDBC2.4A	
Dimensions L x W x H	205 x 125 x 75 mm	
	Input	Output
Rated voltage	230 – 240 V~ / 50 Hz	21.5V
Rated current		2.4 A
Rated power consumption	130 W	

PRODUCT DATA

	SDBC4.5A	
Dimensions L x W x H	240 x 145 x 85 mm	
	Input	Output
Rated voltage	230 – 240 V~ / 50 Hz	21.5V
Rated current		4.5 A
Rated power consumption	240 W	

LOGISTICAL DATA

	SDBC2.4A	SDBC4.5A
Weight net / gross	0.7 / 0.9 kg	1 / 1.2 kg
Packaging dimensions	165 x 225 x 90 mm	260 x 190 x 92 mm
Item number	7909201712	7909201713
EAN	4014915236528	4014915236535
20 containers	7440 pcs.	7440 pcs.
40 containers	15400 pcs.	15400 pcs.
Container 40 HQ	18070 pcs.	18070 pcs.

SDBC2.4A
approx. 60 min (2.0 Ah)
approx. 120 mins (4.0 Ah)

SDBC4.5A
approx. 35 min (2.0 Ah)
approx. 60 mins (4.0 Ah)



LED



20 V



STARTER KIT

SBSK2.0

2.0 Ah
SBP2.0

2.4 A
SBC2.4A



LOGISTICAL DATA

Weight net / gross	0.77 / 0.85 kg
Packaging dimensions	177 x 150 x 90 mm
Item number	7909201720
EAN	4014915236726
20 containers	7560 pcs.
40 containers	16128 pcs.
40 HQ containers	18816 pcs.

SBP2.0 / 2.0 AH
SBC2.4 / 2.4 A

SBSK4.0

4.0 Ah
SBP4.0

2.4 A
SBC2.4A



LOGISTICAL DATA

Weight net / gross	1 / 1.1 kg
Packaging dimensions	177 x 150 x 90 mm
Item number	7909201721
EAN	4014915236733
20 containers	7560 pcs.
40 containers	16128 pcs.
40 HQ containers	18816 pcs.

SBP4.0 / 4.0 AH
SBC2.4 / 2.4 A

SBP2.0X2



LOGISTICAL DATA

Weight net / gross	0.8 / 1 kg
Packaging dimensions	160 x 130 x 70 mm
Item number	7909201739
EAN	4046664242253

2.0 Ah
SBP2.0

2X SBP2.0 / 2.0 AH



LED



20 V



STARTER KIT

SBP4.0X2



LOGISTICAL DATA

Weight net / gross	1.4 / 1.6 kg
Packaging dimensions	175 x 128 x 90 mm
Item number	7909201742
EAN	4046664242345

4.0 Ah
SBP4.0

2X SBP4.0 / 4.0 AH

SBSK2.0-F



LOGISTICAL DATA

Weight net / gross	0.8 / 1.1 kg
Packaging dimensions	185 x 170 x 95 mm
Item number	7909201733
EAN	4046664241249

2.0 Ah
SBP2.0

4.5 A
SBC4.5A

SBP2.0 / 2.0 AH
SBC4.5 / 4.5 A

SBSK4.0-F



LOGISTICAL DATA

Weight net / gross	1.1 / 1.4 kg
Packaging dimensions	195 x 170 x 95 mm
Item number	7909201736
EAN	4046664241232

4.0 Ah
SBP4.0

4.5 A
SBC4.5A

SBP4.0 / 4.0 AH
SBC4.5 / 4.5 A



STARTER KIT

SBSK2.0X2

LOGISTICAL DATA

Weight net / gross	1.15 / 1.4 kg
Packaging dimensions	260 x 150 x 90 mm
Item number	7909201740
EAN	4046664242246



2.0 Ah
SBP2.0

2.4 A
SBC2.4A

2X SBP2.0 / 2.0 AH
SBC2.4 / 2.4 A

SBSK4.0X2

LOGISTICAL DATA

Weight net / gross	1.75 / 2 kg
Packaging dimensions	tba
Item number	7909201743
EAN	4046664242352



4.0 Ah
SBP4.0

2.4 A
SBC2.4A

2X SBP4.0 / 4.0 AH
SBC2.4 / 2.4 A



LED



20 V



STARTER KIT

SBSK2.0X2-F



2.0 Ah
SBP2.0

4.5 A
SBC4.5A

2X SBP2.0 / 2.0 AH
SBC4.5 / 4.5 A

LOGISTICAL DATA

Weight net / gross	1.2 / 1.6 kg
Packaging dimensions	280 x 165 x 97 mm
Item number	7909201741
EAN	4046664242338

SBSK4.0X2-F



4.0 Ah
SBP4.0

4.5 A
SBC4.5A

2X SBP4.0 / 4.0 AH
SBC4.5 / 4.5 A

LOGISTICAL DATA

Weight net / gross	1.8 / 2.2 kg
Packaging dimensions	238 x 165 x 95 mm
Item number	7909201744
EAN	4046664242369



STARTER KIT

SBSK2.0-TWIN

LOGISTICAL DATA

Weight net / gross	1.5 / 1.9 kg
Packaging dimensions	380 x 140 x 92 mm
Item number	7909201734
EAN	4046664241102



2.0 Ah
SBP2.0

2.4 A
SDBC2.4A

2X SBP2.0 / 2.0 AH
SDBC2.4 / 2.4 A

SBSK4.0-TWIN

LOGISTICAL DATA

Weight net / gross	2.1 / 2.5 kg
Packaging dimensions	340 x 169 x 90 mm
Item number	7909201737
EAN	4046664241225



4.0 Ah
SBP4.0

2.4 A
SDBC2.4A

2X SBP4.0 / 4.0 AH
SDBC2.4 / 2.4 A



STARTER KIT

SBSK2.0-TWIN-F



2.0 Ah
SBP2.0

4.5 A
SDBC4.5A

2X SBP2.0 / 2.0 AH
SDBC4.5 / 4.5 A

LOGISTICAL DATA

Weight net / gross	1.8 / 2.2 kg
Packaging dimensions	380 x 175 x 95 mm
Item number	7909201735
EAN	4046664241287

SBSK4.0-TWIN-F



4.0 Ah
SBP4.0

4.5 A
SDBC4.5A

2X SBP4.0 / 4.0 AH
SDBC4.5 / 4.5 A

LOGISTICAL DATA

Weight net / gross	2.4 / 2.8 kg
Packaging dimensions	380 x 175 x 95 mm
Item number	7909201738
EAN	4046664241201



Over 100 machines and ever-new
developments ensure

that there are no limits!



scheppach
Germany

Scheppach GmbH
Günzburger Str. 69 | D-89335 Ichenhausen | Tel: 0049 8223 4002-99
www.scheppach.com

Issued 03/2026 | Subject to technical changes and errors. Figures may differ from the original.